

One-piece tray

Selection guide



Ventilated trough

- Formed from a pre-punched sheet to produce a one-piece ventilated trough
- Available in aluminum, pregalvanized steel, hot-dipped galvanized steel and stainless steel 316
- Fittings are also available to complete this cable tray system

Solid trough

- Fabricated from one sheet to form a continuous one-piece tray design
- Available in aluminum, pregalvanized steel, hot-dipped galvanized steel and stainless steel 316
- Fittings are also available to complete this cable tray system

—
1 pair of splice plates complete with hardware supplied with each straight length.

One-piece tray

Selection guide


Straight section number selection

How to create part numbers

ABB has created a numbering system based on the order of selection criteria. For example, the first selection issue is the environment to which the cable tray will be subjected. This selection will lead to the best material for your application. For complete details on the cable tray selection process, see page A8.

Methods

1. Select the material best suited to your environment. Refer to technical section page A8.
2. Determine the tray series using the NEMA load/span designations page A14, and sizing cable tray page A21.
3. Select nominal depth and width of tray based on cable loading. See sizing cable tray page A21.
4. Select the bottom type based on cables and spacing requirements.
5. The last number is the length of the cable tray.

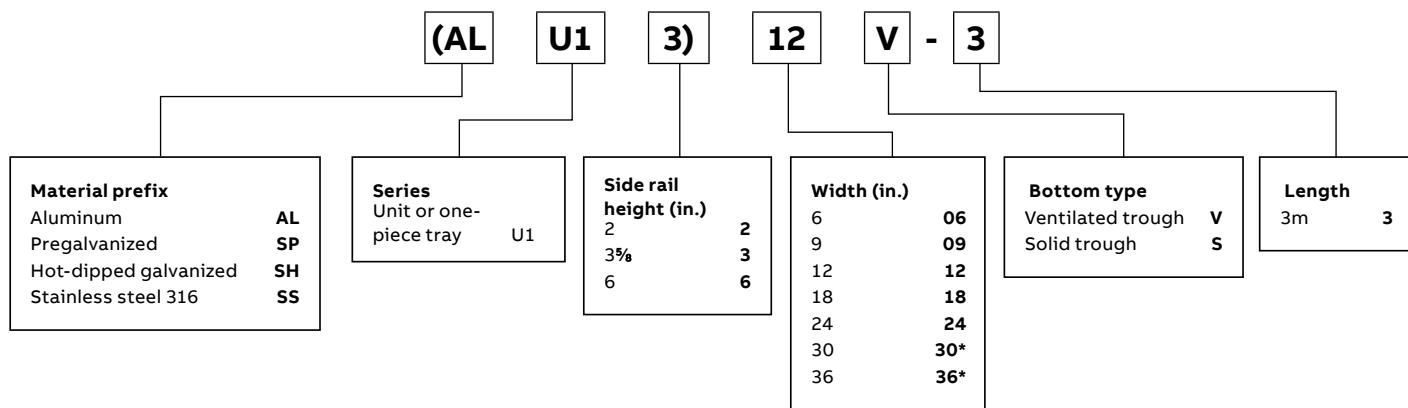


*Welded flat rung

— Standard straight length is 10 feet nominal
3m = 9.842 ft.

One-piece tray straight lengths

2 in. straight sections/AL, SP, SH, SS – Solid and vented

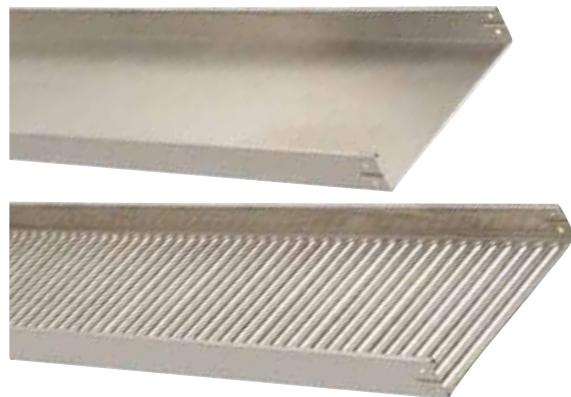

Technical specifications


All calculations and data are based on 36 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

2 in. straight sections/AL, SP, SH, SS – Solid and vented

Series		Support span (feet)		
		6	8	10
ALU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040
SPU12 SHU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040
SSU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040

Straight section number selection

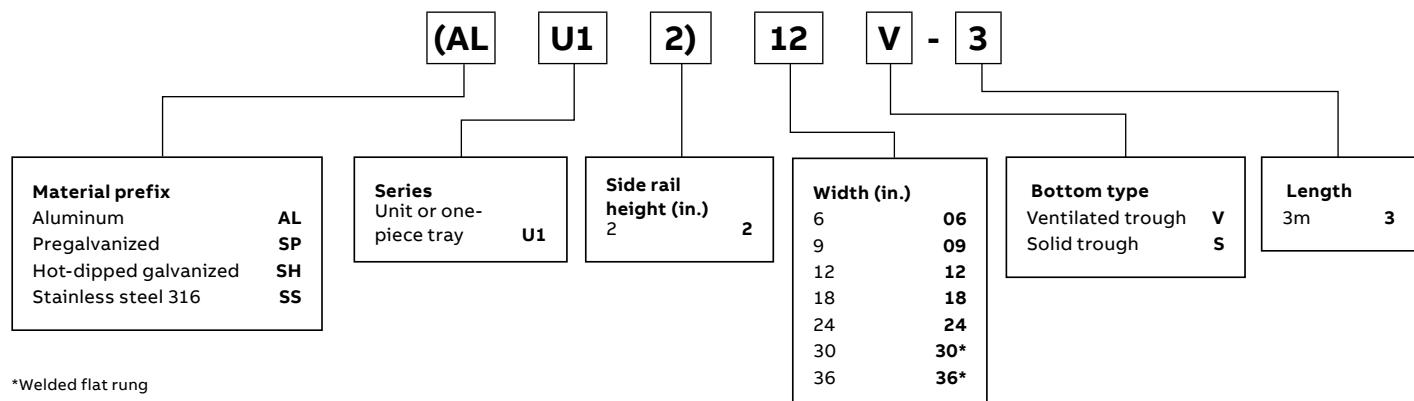


*Welded flat rung

Standard straight length is 10 feet nominal.
3 m = 9.842 ft.

For fittings, consult pages A182 to A200.

Dimensions

	All U12 series (dimensions)	
	W (in.)	Wi (in.)
1.890	6	5.0
	9	8.0
	12	11.0
	18	17.0
	24	23.0
	30	29.0
	36	35.0

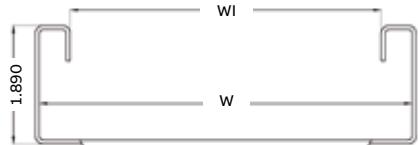**Technical specifications**


Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

Load ratings: 1.5 safety factor

Series	Dimensions	NEMA	Classifications
ALU12	See above	-	A
SPU12	See above	-	A
SHU12	See above	-	A
SSU12	See above	-	A

One-piece tray straight lengths

3 $\frac{5}{8}$ in. straight sections/AL, SP, SH, SS – Solid and vented

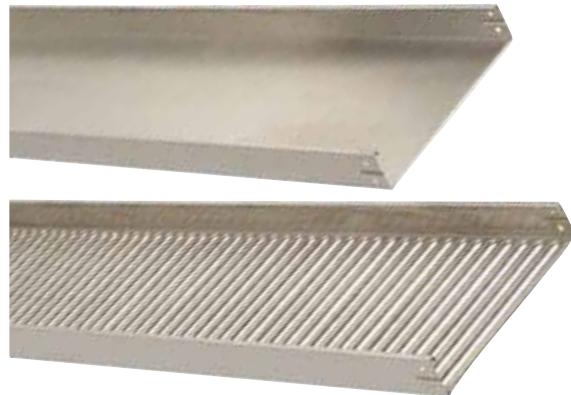

Technical specifications


All calculations and data are based on 36 in. wide cable trays with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

3 $\frac{5}{8}$ straight sections/AL, SP, SH, SS – Solid and vented

Series		Support span (feet)		
		6	8	10
ALU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.382	0.430	0.540
	Deflection factor	0.002	0.004	0.008
SPU13 SHU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection factor	0.001	0.002	0.005
SSU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection factor	0.001	0.002	0.005

Straight section number selection

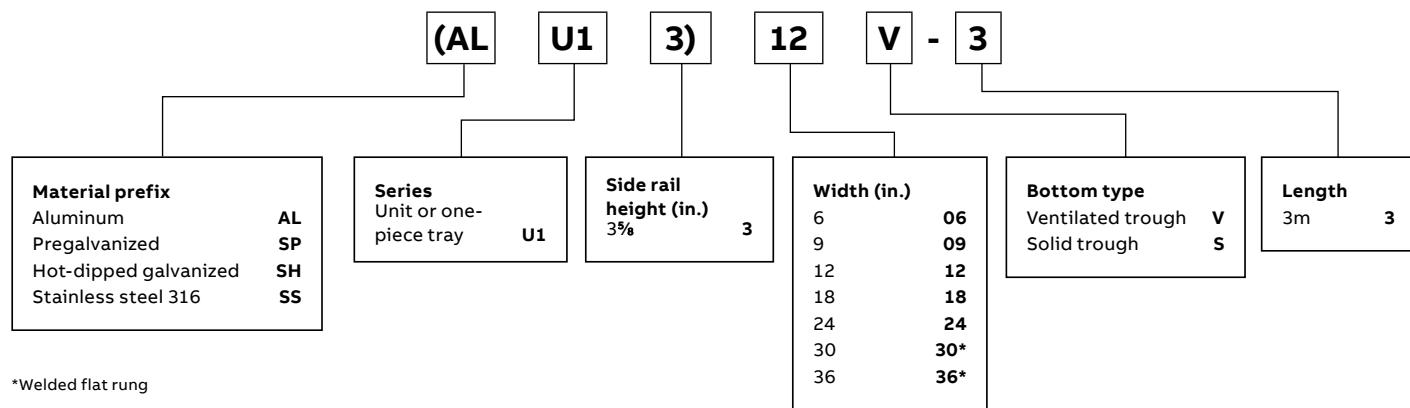

*Welded flat rung

Standard straight length is 10 feet nominal.
3 m = 9.842 ft.

For fittings, consult pages A182 to A200.

Dimensions

	All U13 series (dimensions)	
	W (in.)	Wi (in.)
3.625	6	5.0
	9	8.0
	12	11.0
	18	17.0
	24	23.0
	30	29.0
	36	35.0


Technical specifications


Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

Load ratings: 1.5 safety factor

Series	Dimensions	Classifications	
		NEMA	CSA
ALU13	See above	8C	C
SPU13	See above	8C	C
SHU13	See above	8C	C
SSU13	See above	8C	C

One-piece tray straight lengths

6 in. straight sections/AL, SP, SH, SS – Solid and vented

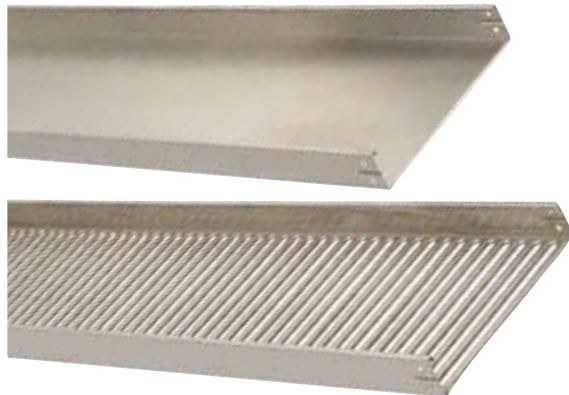

6 in. straight sections/AL, SP, SH, SS – Solid and vented


Technical specifications

All calculations and data are based on 36 in. wide cable trays with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

Series	Support span (feet)			
	6	8	10	
ALU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.082	0.128	0.160
	Deflection Factor	0.000	0.001	0.008
SPU16 SHU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection Factor	0.001	0.002	0.005
SSU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection Factor	0.001	0.002	0.005

Straight section number selection

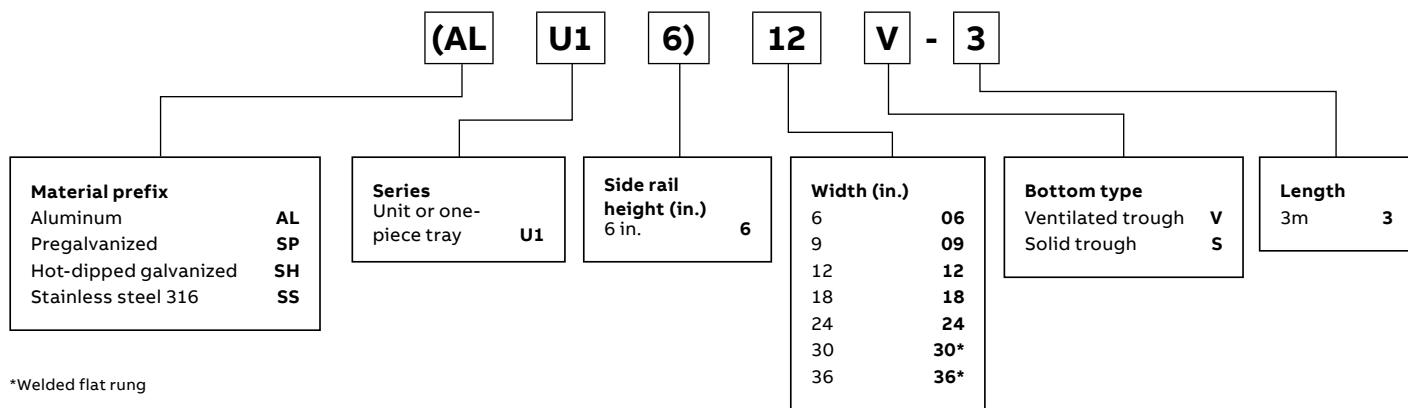


*Welded flat rung

Standard straight length is 10 feet nominal.
3 m = 9.842 ft.

For fittings, consult pages A182 to A200.

Dimensions

		All U16 series (dimensions)	
		W (in.)	Wi (in.)
		6	5.0
		9	8.0
		12	11.0
		18	17.0
		24	23.0
		30	29.0
		36	35.0

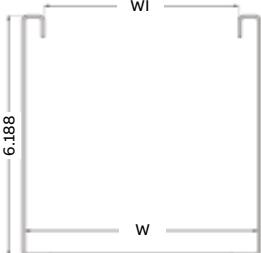
Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

Load ratings: 1.5 safety factor


Series	Dimensions	NEMA	Classifications
ALU16	See above	8C	C
SPU16	See above	8C	C
SHU16	See above	8C	C
SSU16	See above	8C	C

One-piece tray

Fittings



Fittings number selection

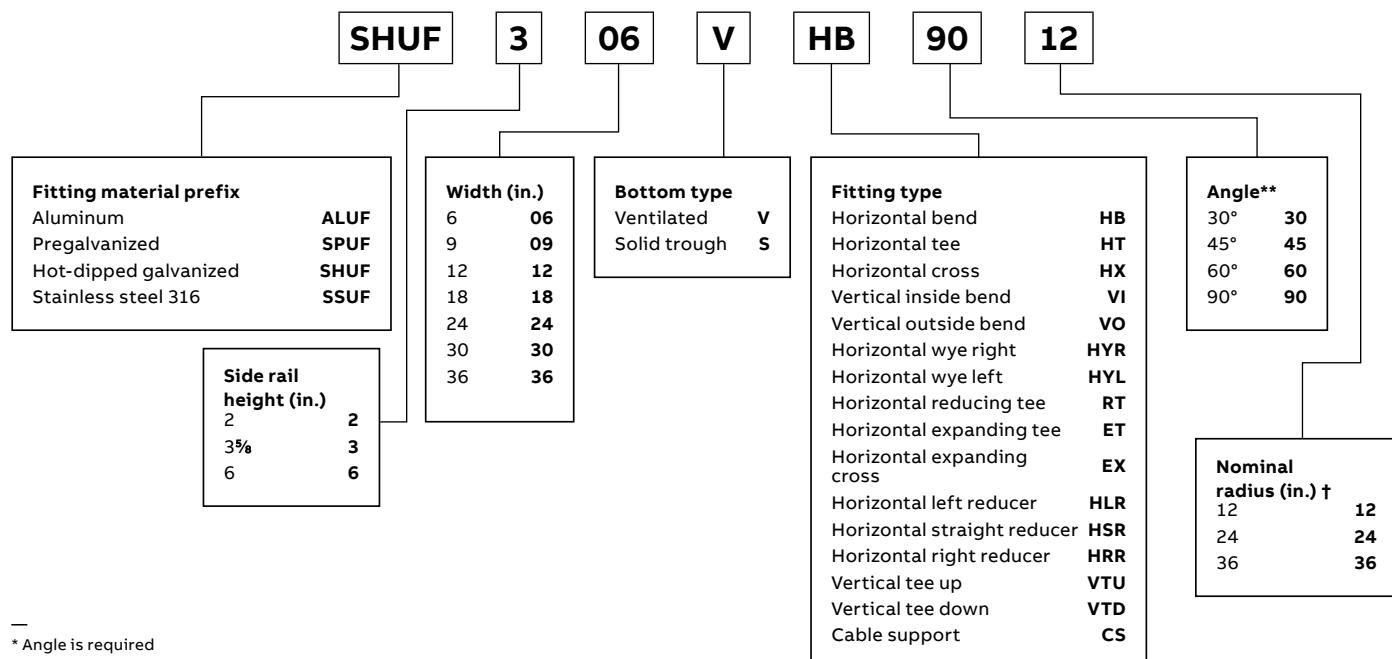

* Angle is required
for HB, VI, VO only.

† Radius is not required
for the following
fitting types: HYR,
HYL, HLR, HRR, HSR

One-piece tray


90° Horizontal bend fittings

90° Horizontal bend

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
			X	Y	Z
12	06	Prefix(†)-06-(*)-HB90-12	15	15	15
12	09	Prefix(†)-09-(*)-HB90-12	16½	16½	16½
12	12	Prefix(†)-12-(*)-HB90-12	18	18	18
12	18	Prefix(†)-18-(*)-HB90-12	21	21	21
12	24	Prefix(†)-24-(*)-HB90-12	24	24	24
12	30	Prefix(†)-30-(*)-HB90-12	27	27	27
12	36	Prefix(†)-36-(*)-HB90-12	30	30	30
24	06	Prefix(†)-06-(*)-HB90-24	27	27	17
24	09	Prefix(†)-09-(*)-HB90-24	28½	28½	28 ½
24	12	Prefix(†)-12-(*)-HB90-24	30	30	30
24	18	Prefix(†)-18-(*)-HB90-24	33	33	33
24	24	Prefix(†)-24-(*)-HB90-24	36	36	36
24	30	Prefix(†)-30-(*)-HB90-24	39	39	39
24	36	Prefix(†)-36-(*)-HB90-24	42	42	42
36	06	Prefix(†)-06-(*)-HB90-36	39	39	39
36	09	Prefix(†)-09-(*)-HB90-36	40½	40½	40½
36	12	Prefix(†)-12-(*)-HB90-36	42	42	42
36	18	Prefix(†)-18-(*)-HB90-36	45	45	45
36	24	Prefix(†)-24-(*)-HB90-36	48	48	48
36	30	Prefix(†)-30-(*)-HB90-36	51	51	51
36	36	Prefix(†)-36-(*)-HB90-36	54	54	54

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.


Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 90°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

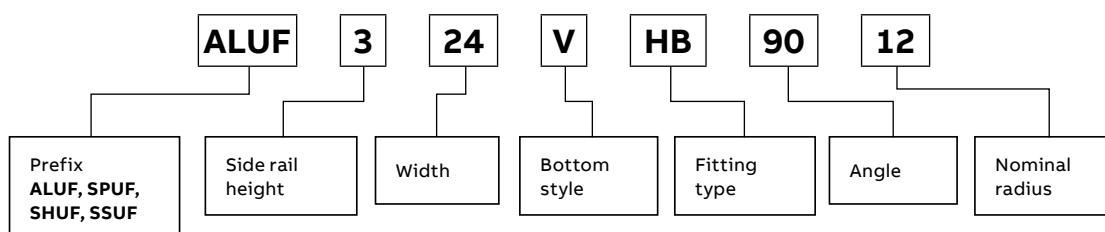

One-piece tray


60° Horizontal bend fittings

60° Horizontal bend

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
			X	Y	Z
12	06	Prefix(†)-06-(*)-HB60-12	14 ⁷ / ₈	8 ⁵ / ₈	9 ¹⁵ / ₁₆
12	09	Prefix(†)-09-(*)-HB60-12	16 ³ / ₁₆	9 ⁹ / ₈	10 ¹³ / ₁₆
12	12	Prefix(†)-12-(*)-HB60-12	17 ¹ / ₂	10 ¹ / ₈	11 ¹¹ / ₁₆
12	18	Prefix(†)-18-(*)-HB60-12	20 ¹ / ₁₆	11 ⁵ / ₈	13 ³ / ₈
12	24	Prefix(†)-24-(*)-HB60-12	22 ¹¹ / ₁₆	13 ¹ / ₈	15 ¹ / ₈
12	30	Prefix(†)-30-(*)-HB60-12	25 ⁵ / ₁₆	14 ⁵ / ₈	16 ⁷ / ₈
12	36	Prefix(†)-36-(*)-HB60-12	27 ⁷ / ₈	16 ¹ / ₈	18 ⁹ / ₁₆
24	06	Prefix(†)-06-(*)-HB60-24	25 ¹ / ₁₆	14 ⁵ / ₈	16 ⁷ / ₈
24	09	Prefix(†)-09-(*)-HB60-24	26 ¹⁹ / ₃₂	15 ³ / ₈	17 ²³ / ₃₂
24	12	Prefix(†)-12-(*)-HB60-24	27 ⁷ / ₈	16 ¹ / ₈	18 ⁵ / ₁₆
24	18	Prefix(†)-18-(*)-HB60-24	30 ¹ / ₂	17 ⁵ / ₈	20 ⁵ / ₁₆
24	24	Prefix(†)-24-(*)-HB60-24	33 ¹ / ₁₆	19 ¹ / ₈	22 ¹ / ₁₆
24	30	Prefix(†)-30-(*)-HB60-24	35 ¹¹ / ₁₆	20 ⁵ / ₈	23 ¹³ / ₁₆
24	36	Prefix(†)-36-(*)-HB60-24	38 ³ / ₄	22 ¹ / ₈	25 ¹ / ₂
36	06	Prefix(†)-06-(*)-HB60-36	35 ¹¹ / ₁₆	20 ⁵ / ₈	23 ¹³ / ₁₆
36	09	Prefix(†)-09-(*)-HB60-36	36 ³¹ / ₃₂	21 ³ / ₈	24 ²¹ / ₃₂
36	12	Prefix(†)-12-(*)-HB60-36	38 ¹ / ₄	22 ¹ / ₈	25 ¹ / ₂
36	18	Prefix(†)-18-(*)-HB60-36	40 ⁷ / ₈	23 ⁵ / ₈	27 ¹ / ₄
36	24	Prefix(†)-24-(*)-HB60-36	43 ¹ / ₂	25 ⁵ / ₈	29
36	30	Prefix(†)-30-(*)-HB60-36	46 ¹ / ₁₆	26 ⁵ / ₈	30 ¹¹ / ₁₆
36	36	Prefix(†)-36-(*)-HB60-36	48 ¹¹ / ₁₆	28 ¹ / ₈	32 ⁷ / ₁₆

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.


Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 60°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

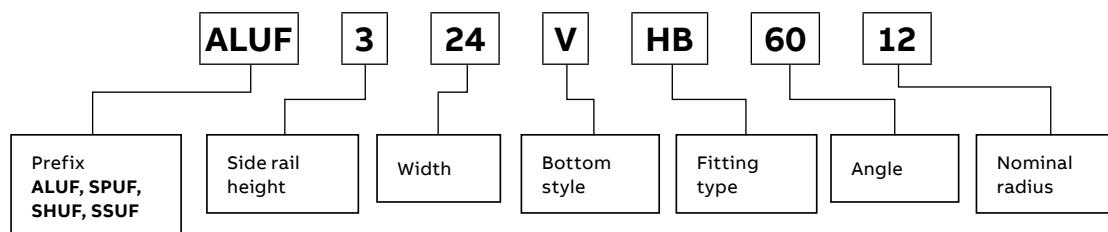


One-piece tray

45° Horizontal bend fittings

45° Horizontal bend

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
			X	Y	Z
12	06	Prefix(†)-06-(*)-HB45-12	13 ⁵ / ₈	5 ⁵ / ₈	8
12	09	Prefix(†)-09-(*)-HB45-12	14 ¹¹ / ₁₆	6 ¹ / ₁₆	8 ¹⁹ / ₃₂
12	12	Prefix(†)-12-(*)-HB45-12	15 ³ / ₄	6 ¹ / ₂	9 ³ / ₁₆
12	18	Prefix(†)-18-(*)-HB45-12	17 ⁷ / ₈	7 ³ / ₈	10 ⁷ / ₁₆
12	24	Prefix(†)-24-(*)-HB45-12	20	8 ¹ / ₄	11 ¹¹ / ₁₆
12	30	Prefix(†)-30-(*)-HB45-12	22 ¹ / ₁₆	9 ¹ / ₈	12 ¹⁵ / ₁₆
12	36	Prefix(†)-36-(*)-HB45-12	24 ³ / ₁₆	10	14 ³ / ₁₆
24	06	Prefix(†)-06-(*)-HB45-24	22 ¹ / ₁₆	9 ¹ / ₈	12 ¹⁵ / ₁₆
24	09	Prefix(†)-09-(*)-HB45-24	23 ¹ / ₈	9 ⁹ / ₁₆	13 ⁹ / ₁₆
24	12	Prefix(†)-12-(*)-HB45-24	24 ³ / ₁₆	10	14 ³ / ₁₆
24	18	Prefix(†)-18-(*)-HB45-24	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
24	24	Prefix(†)-24-(*)-HB45-24	28 ⁷ / ₁₆	11 ¹³ / ₁₆	16 ¹¹ / ₁₆
24	30	Prefix(†)-30-(*)-HB45-24	30 ¹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
24	36	Prefix(†)-36-(*)-HB45-24	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ¹ / ₈
36	06	Prefix(†)-06-(*)-HB45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
36	09	Prefix(†)-09-(*)-HB45-36	31 ⁵ / ₈	13 ¹ / ₈	18 ¹⁷ / ₃₂
36	12	Prefix(†)-12-(*)-HB45-36	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ¹ / ₈
36	18	Prefix(†)-18-(*)-HB45-36	34 ¹³ / ₁₆	14 ⁷ / ₁₆	20 ³ / ₈
36	24	Prefix(†)-24-(*)-HB45-36	36 ¹⁵ / ₁₆	15 ⁵ / ₁₆	21 ¹ / ₈
36	30	Prefix(†)-30-(*)-HB45-36	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
36	36	Prefix(†)-36-(*)-HB45-36	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈


(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 45°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

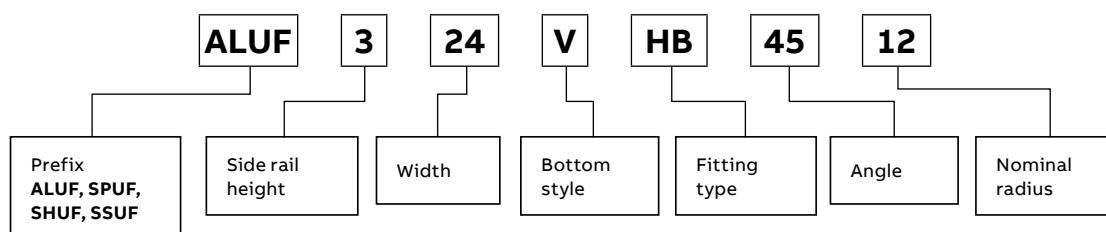


One-piece tray

30° Horizontal bend fittings

30° Horizontal bend

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
			X	Y	Z
12	06	Prefix(†)-06-(*)-HB30-12	11 $\frac{5}{8}$	3 $\frac{1}{8}$	6 $\frac{3}{16}$
12	09	Prefix(†)-09-(*)-HB30-12	12 $\frac{9}{16}$	3 $\frac{5}{16}$	6 $\frac{19}{32}$
12	12	Prefix(†)-12-(*)-HB30-12	13 $\frac{1}{2}$	3 $\frac{1}{2}$	7
12	18	Prefix(†)-18-(*)-HB30-12	14 $\frac{5}{8}$	3 $\frac{15}{16}$	7 $\frac{13}{16}$
12	24	Prefix(†)-24-(*)-HB30-12	16 $\frac{1}{8}$	4 $\frac{5}{16}$	8 $\frac{5}{8}$
12	30	Prefix(†)-30-(*)-HB30-12	17 $\frac{5}{8}$	4 $\frac{11}{16}$	9 $\frac{7}{16}$
12	36	Prefix(†)-36-(*)-HB30-12	19 $\frac{1}{8}$	5 $\frac{1}{8}$	10 $\frac{1}{4}$
24	06	Prefix(†)-06-(*)-HB30-24	17 $\frac{5}{8}$	4 $\frac{11}{16}$	9 $\frac{7}{16}$
24	09	Prefix(†)-09-(*)-HB30-24	18 $\frac{3}{8}$	4 $\frac{29}{32}$	9 $\frac{27}{32}$
24	12	Prefix(†)-12-(*)-HB30-24	19 $\frac{1}{8}$	5 $\frac{1}{8}$	10 $\frac{1}{4}$
24	18	Prefix(†)-18-(*)-HB30-24	20 $\frac{5}{8}$	5 $\frac{1}{2}$	11 $\frac{1}{16}$
24	24	Prefix(†)-24-(*)-HB30-24	22 $\frac{1}{8}$	5 $\frac{15}{16}$	11 $\frac{13}{16}$
24	30	Prefix(†)-30-(*)-HB30-24	23 $\frac{5}{8}$	6 $\frac{5}{16}$	12 $\frac{5}{8}$
24	36	Prefix(†)-36-(*)-HB30-24	25 $\frac{1}{8}$	6 $\frac{3}{4}$	13 $\frac{7}{16}$
36	06	Prefix(†)-06-(*)-HB30-36	23 $\frac{5}{8}$	6 $\frac{5}{16}$	12 $\frac{5}{8}$
36	09	Prefix(†)-09-(*)-HB30-36	24 $\frac{3}{8}$	6 $\frac{17}{32}$	13 $\frac{1}{32}$
36	12	Prefix(†)-12-(*)-HB30-36	25 $\frac{1}{8}$	6 $\frac{3}{4}$	13 $\frac{7}{16}$
36	18	Prefix(†)-18-(*)-HB30-36	26 $\frac{5}{8}$	7 $\frac{1}{4}$	14 $\frac{1}{4}$
36	24	Prefix(†)-24-(*)-HB30-36	28 $\frac{1}{8}$	7 $\frac{1}{2}$	15 $\frac{1}{16}$
36	30	Prefix(†)-30-(*)-HB30-36	29 $\frac{5}{8}$	7 $\frac{15}{16}$	15 $\frac{5}{8}$
36	36	Prefix(†)-36-(*)-HB30-36	31 $\frac{1}{8}$	8 $\frac{5}{16}$	16 $\frac{11}{16}$




(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 30°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V – ventilated, S – solid
- Side rail height: 2, 3, 6 in.

Part numbering system

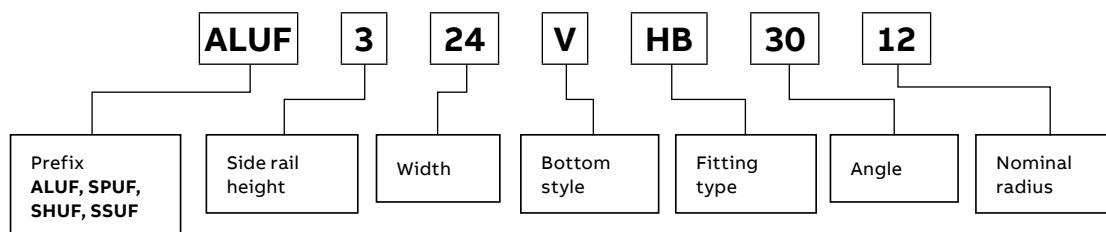

One-piece tray

Horizontal tee fittings


Horizontal tee

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
Solid	12	06	Prefix(t)-06-(*)-HT12	15	30
	12	09	Prefix(t)-09-(*)-HT12	16½	33
	12	12	Prefix(t)-12-(*)-HT12	18	36
	12	18	Prefix(t)-18-(*)-HT12	21	42
	12	24	Prefix(t)-24-(*)-HT12	24	48
	12	30	Prefix(t)-30-(*)-HT12	27	54
	12	36	Prefix(t)-36-(*)-HT12	30	60
	24	06	Prefix(t)-06-(*)-HT24	27	54
Ventilated	24	09	Prefix(t)-09-(*)-HT24	28½	57
	24	12	Prefix(t)-12-(*)-HT24	30	60
	24	18	Prefix(t)-18-(*)-HT24	33	66
	24	24	Prefix(t)-24-(*)-HT24	36	72
	24	30	Prefix(t)-30-(*)-HT24	39	78
	24	36	Prefix(t)-36-(*)-HT24	42	84
	36	06	Prefix(t)-06-(*)-HT36	39	78
	36	09	Prefix(t)-09-(*)-HT36	40½	81
	36	12	Prefix(t)-12-(*)-HT36	42	84
	36	18	Prefix(t)-18-(*)-HT36	45	90
	36	24	Prefix(t)-24-(*)-HT36	48	96
	36	30	Prefix(t)-30-(*)-HT36	51	102
	36	36	Prefix(t)-36-(*)-HT36	54	108

(t) Insert side rail height. (*) Insert bottom style to complete cat. no.

Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware.


Dimensions



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

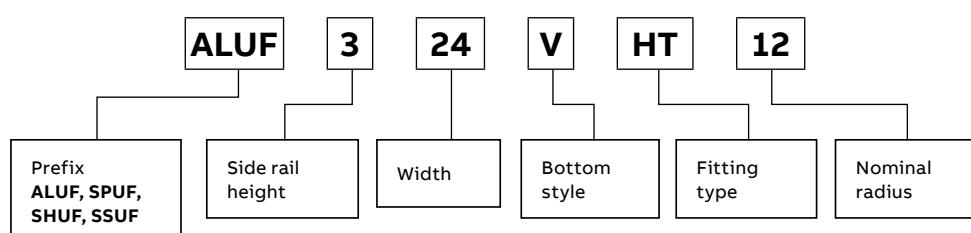

One-piece tray

Horizontal cross fittings


Horizontal cross

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
Solid	12	06	Prefix(†)-06-(*)-HX12	15	30
	12	09	Prefix(†)-09-(*)-HX12	16½	33
	12	12	Prefix(†)-12-(*)-HX12	18	36
	12	18	Prefix(†)-18-(*)-HX12	21	42
	12	24	Prefix(†)-24-(*)-HX12	24	48
	12	30	Prefix(†)-30-(*)-HX12	27	54
	12	36	Prefix(†)-36-(*)-HX12	30	60
	24	06	Prefix(†)-06-(*)-HX24	27	54
Ventilated	24	09	Prefix(†)-09-(*)-HX24	28½	57
	24	12	Prefix(†)-12-(*)-HX24	30	60
	24	18	Prefix(†)-18-(*)-HX24	33	66
	24	24	Prefix(†)-24-(*)-HX24	36	72
	24	30	Prefix(†)-30-(*)-HX24	39	78
	24	36	Prefix(†)-36-(*)-HX24	42	84
	36	06	Prefix(†)-06-(*)-HX36	39	78
	36	09	Prefix(†)-09-(*)-HX36	40½	81
	36	12	Prefix(†)-12-(*)-HX36	42	84
	36	18	Prefix(†)-18-(*)-HX36	45	90
	36	24	Prefix(†)-24-(*)-HX36	48	96
	36	30	Prefix(†)-30-(*)-HX36	51	102
	36	36	Prefix(†)-36-(*)-HX36	54	108

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.

Tees include 2 pairs / crosses include 3 pairs of splice plates with hardware.


Dimensions



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

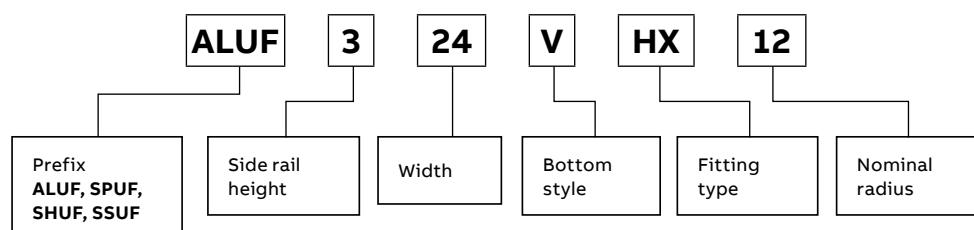

One-piece tray

Horizontal reducing tee fittings

Horizontal reducing tee


Widths (in.)			(+) 12 in. Nominal radius		(+) 24 in. Nominal radius		(+) 36 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y
36	30	Prefix(t)-3630-(*)-RT(+)	30	54	42	78	54	102
36	24	Prefix(t)-3624-(*)-RT(+)	30	48	42	72	54	96
36	18	Prefix(t)-3618-(*)-RT(+)	30	42	42	66	54	90
36	12	Prefix(t)-3612-(*)-RT(+)	30	36	42	60	54	84
36	09	Prefix(t)-3609-(*)-RT(+)	30	33	42	57	54	81
36	06	Prefix(t)-3606-(*)-RT(+)	30	30	42	54	54	78
30	24	Prefix(t)-3024-(*)-RT(+)	27	48	39	72	51	96
30	18	Prefix(t)-3018-(*)-RT(+)	27	42	39	66	51	90
30	12	Prefix(t)-3012-(*)-RT(+)	27	36	39	60	51	84
30	09	Prefix(t)-3009-(*)-RT(+)	27	33	39	57	51	81
30	06	Prefix(t)-3006-(*)-RT(+)	27	30	39	54	51	78
24	18	Prefix(t)-2418-(*)-RT(+)	24	42	36	66	48	90
24	12	Prefix(t)-2412-(*)-RT(+)	24	36	36	60	48	84
24	09	Prefix(t)-2409-(*)-RT(+)	24	33	36	57	48	81
24	06	Prefix(t)-2406-(*)-RT(+)	24	30	36	54	48	78
18	12	Prefix(t)-1812-(*)-RT(+)	21	36	33	60	45	84
18	09	Prefix(t)-1809-(*)-RT(+)	21	33	33	57	45	81
18	06	Prefix(t)-1806-(*)-RT(+)	21	30	33	54	45	78
12	09	Prefix(t)-1209-(*)-RT(+)	18	33	30	57	42	81
12	06	Prefix(t)-1206-(*)-RT(+)	18	30	30	54	42	78
09	06	Prefix(t)-906-(*)-RT(+)	16½	30	28½	54	40½	78

(†) Insert side rail height. (*) Insert bottom style (+) Insert radius (12 in. – 36 in.) to complete cat. no.
Includes 2 pairs of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 36, 30, 24, 18, 12, 09 in.
- Tray widths W2: 30, 24, 18, 12, 09, 06 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.

Part numbering system

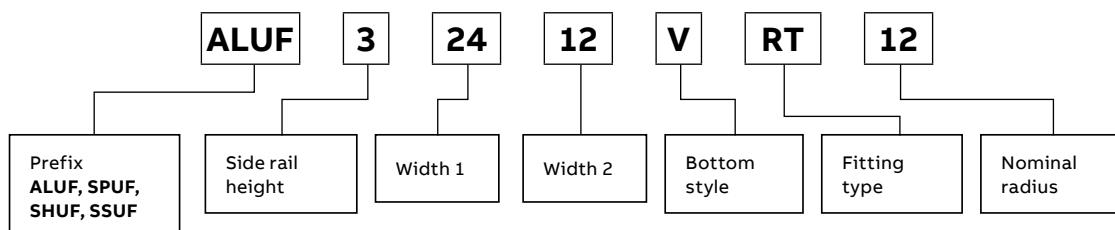

One-piece tray


Horizontal expanding tee fittings

Horizontal expanding tee

Widths (in.)			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		Dimensions (in.)
W1	W2	Cat. no.	X	Y	X	Y	X	Y	
	30	Prefix(t)-3036-(*)-ET(+)	27	60	39	84	51	108	
	24	Prefix(t)-2430-(*)-ET(+)	24	54	36	78	48	102	
	24	Prefix(t)-2436-(*)-ET(+)	24	60	36	84	48	108	
	18	Prefix(t)-1824-(*)-ET(+)	21	48	33	72	45	96	
	18	Prefix(t)-1830-(*)-ET(+)	21	54	33	78	45	102	
	18	Prefix(t)-1836-(*)-ET(+)	21	60	33	84	45	108	
	12	Prefix(t)-1218-(*)-ET(+)	18	42	30	66	42	90	
	12	Prefix(t)-1224-(*)-ET(+)	18	48	30	72	42	96	
	12	Prefix(t)-1230-(*)-ET(+)	18	54	30	78	42	102	
	12	Prefix(t)-1236-(*)-ET(+)	18	60	30	84	42	108	
	09	Prefix(t)-0912-(*)-ET(+)	16½	36	28½	60	40½	84	
	09	Prefix(t)-0918-(*)-ET(+)	16½	42	28½	66	40½	90	
	09	Prefix(t)-0942-(*)-ET(+)	16½	48	28½	72	40½	96	
	09	Prefix(t)-0930-(*)-ET(+)	16½	54	28½	78	40½	102	
	09	Prefix(t)-0936-(*)-ET(+)	16½	60	28½	84	40½	108	
	06	Prefix(t)-0609-(*)-ET(+)	15	33	27	57	39	81	
	06	Prefix(t)-0612-(*)-ET(+)	15	36	27	60	39	84	
	06	Prefix(t)-0618-(*)-ET(+)	15	42	27	66	39	90	
	06	Prefix(t)-0624-(*)-ET(+)	15	48	27	72	39	96	
	06	Prefix(t)-0630-(*)-ET(+)	15	54	27	78	39	102	
	06	Prefix(t)-0636-(*)-ET(+)	15	60	27	84	39	108	

(t) Insert side rail height. (*) Insert bottom style (+) Insert radius (12 in.–36 in.) to complete cat. no.
Includes 2 pairs of splice plates with hardware.

Part numbering system

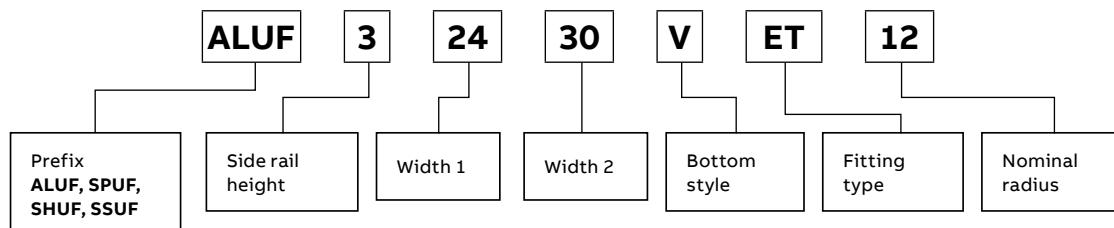

Selection guide

- Prefix: SALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 30, 24, 18, 12, 09, 06 in.
- Tray widths W2: 36, 30, 24, 18, 12, 09 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.

One-piece tray

Horizontal expanding cross fittings

Horizontal expanding cross


Widths (in.)			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		Dimensions (in.)
W1	W2	Cat. no.	X	Y	X	Y	X	Y	
3"	Y	30	54	60	78	84	102	108	
W1	R	24	48	54	72	78	96	102	
		24	48	60	72	84	96	108	
		18	42	48	66	72	90	96	
		18	42	54	66	78	90	102	
		18	42	60	66	84	90	108	
		12	36	42	60	66	84	90	
		12	18	42	60	72	84	96	
		12	24	48	60	78	84	102	
		12	30	54	60	78	84	108	
		12	36	60	60	84	84	108	
		09	12	36	57	60	81	84	
		09	18	42	57	66	81	90	
		09	24	48	57	72	81	96	
		09	30	54	57	78	81	102	
		09	36	60	57	84	81	108	
		06	09	33	54	57	78	81	
		06	12	36	54	60	78	84	
		06	18	42	54	66	78	90	
		06	24	48	54	72	78	96	
		06	30	54	54	78	78	102	
		06	36	60	54	84	78	108	

(†) Insert side rail height. (*) Insert bottom style (+) Insert radius (12 in.–36 in.) to complete cat. no.
Includes 3 pairs of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 30, 24, 18, 12, 09, 06 in.
- Tray widths W2: 36, 30, 24, 18, 12, 09 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.

Part numbering system

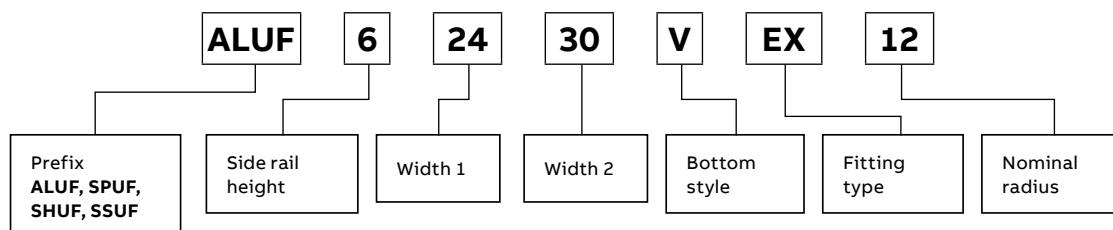


One-piece tray

90° Vertical bend fittings


—
90° Vertical bend

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 90°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.




Outside bend ventilated



Inside bend ventilated

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Part numbering system

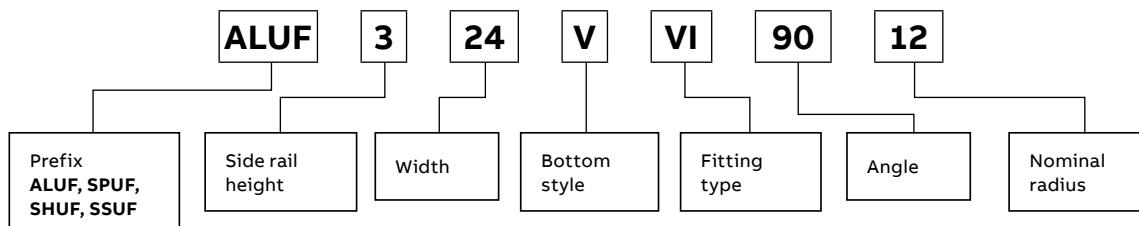


One-piece tray

60° Vertical bend fittings


60° Vertical bend

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 60°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V- ventilated, S- solid
- Side rail height: 2, 3, 6 in.

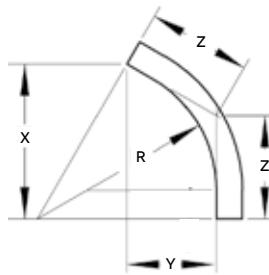


Inside bend

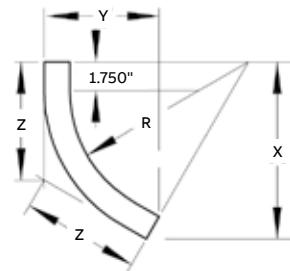

(†) Insert side rail height. (*) Insert bottom style (†) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Part numbering system

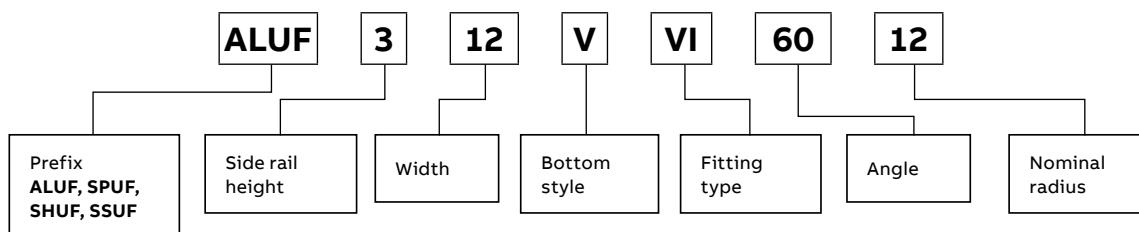

One-piece tray

45° Vertical bend fittings

45° Vertical bend


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	(+ VO side rail height)			Dimensions (in.)					
				2 in., 3 in., 6 in.			2 in.			3 in.		
				X	Y	Z	X	Y	Z	X	Y	Z
Outside bend ventilated	12	06	Prefix(t)-06-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	09	Prefix(t)-09-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	12	Prefix(t)-12-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	18	Prefix(t)-18-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	24	Prefix(t)-24-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	30	Prefix(t)-30-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
	12	36	Prefix(t)-36-(*)-(+)45-12	8½	3½	5	9½	5¾	5¾	11½	7½	6½
Inside bend ventilated	24	06	Prefix(t)-06-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	09	Prefix(t)-09-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	12	Prefix(t)-12-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	18	Prefix(t)-18-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	24	Prefix(t)-24-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	30	Prefix(t)-30-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	24	36	Prefix(t)-36-(*)-(+)45-24	17	7	9½	18½	8½	10½	19½	10½	11½
	36	06	Prefix(t)-06-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	09	Prefix(t)-09-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	12	Prefix(t)-12-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	18	Prefix(t)-18-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	24	Prefix(t)-24-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	30	Prefix(t)-30-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½
	36	36	Prefix(t)-36-(*)-(+)45-36	25½	10½	14½	26½	12½	15½	28	14½	16½

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 45°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.

Part numbering system

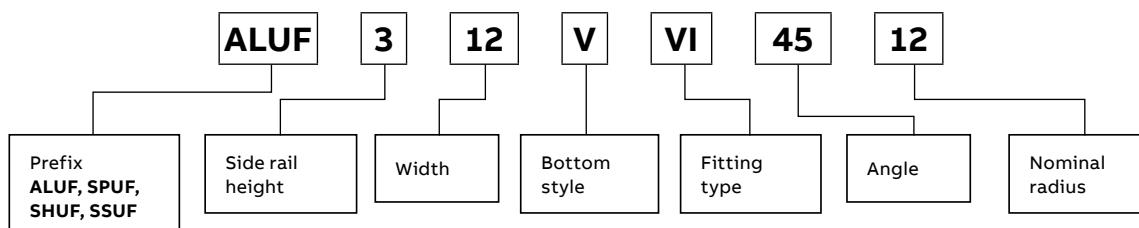

One-piece tray

30° Vertical bend fittings

30° Vertical bend


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)											
				(+) VO side rail height			2 in., 3 in., 6 in.			2 in.			3 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend ventilated	12	06	Prefix(t)-06-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	09	Prefix(t)-12-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	12	Prefix(t)-12-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	18	Prefix(t)-18-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	24	Prefix(t)-24-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	30	Prefix(t)-30-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
	12	36	Prefix(t)-36-(*)-(+)30-12	6	1 1/8	3 3/16	6 15/16	3 1/2	3 11/16	7 13/16	5 1/4	4 3/16	9 1/8	7 13/16	47/8
Inside bend ventilated	24	06	Prefix(t)-06-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	09	Prefix(t)-12-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	12	Prefix(t)-12-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	18	Prefix(t)-18-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	24	Prefix(t)-24-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	30	Prefix(t)-30-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	24	36	Prefix(t)-36-(*)-(+)30-24	12	3 3/16	6 7/16	12 15/16	5 1/8	6 15/16	13 13/16	6 13/16	7 3/8	15 1/8	9 3/8	8 1/16
	36	06	Prefix(t)-06-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	09	Prefix(t)-12-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	12	Prefix(t)-12-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	18	Prefix(t)-18-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	24	Prefix(t)-24-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	30	Prefix(t)-30-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16
	36	36	Prefix(t)-36-(*)-(+)30-36	18	4 13/16	9 5/8	18 15/16	6 11/16	10 1/8	19 13/16	8 7/16	10 1/8	21 1/8	11	11 5/16

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Angle: 30°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.

Part numbering system

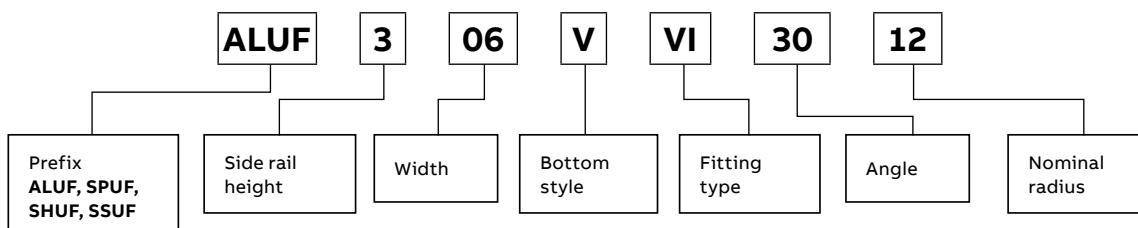

One-piece tray

Horizontal reducer fittings

Straight reducer solid




Straight reducer ventilated




Horizontal reducer

Widths (in.)		LH reducer	
W1	W2	Cat. no.	Dim. X (in.)
36	30	Prefix(t)-36-30-(*)-HLR	15 ¹⁵ / ₁₆
36	24	Prefix(t)-36-24-(*)-HLR	18 ¹⁵ / ₁₆
36	18	Prefix(t)-36-18-(*)-HLR	22 ³ / ₈
36	12	Prefix(t)-36-12-(*)-HLR	25 ⁷ / ₈
36	09	Prefix(t)-36-09-(*)-HLR	27 ¹⁹ / ₃₂
36	06	Prefix(t)-36-06-(*)-HLR	29 ⁵ / ₁₆
30	24	Prefix(t)-30-24-(*)-HLR	15 ¹⁵ / ₁₆
30	18	Prefix(t)-30-18-(*)-HLR	18 ¹⁵ / ₁₆
30	12	Prefix(t)-30-12-(*)-HLR	22 ³ / ₈
30	09	Prefix(t)-30-09-(*)-HLR	24 ¹ / ₈
30	06	Prefix(t)-30-06-(*)-HLR	25 ⁷ / ₈
24	18	Prefix(t)-24-18-(*)-HLR	15 ¹⁵ / ₁₆
24	12	Prefix(t)-24-12-(*)-HLR	18 ¹⁵ / ₁₆
24	09	Prefix(t)-24-09-(*)-HLR	20 ²¹ / ₃₂
24	06	Prefix(t)-24-06-(*)-HLR	22 ³ / ₈
18	12	Prefix(t)-18-12-(*)-HLR	15 ¹⁵ / ₁₆
18	09	Prefix(t)-18-09-(*)-HLR	17 ³ / ₁₆
18	06	Prefix(t)-18-06-(*)-HLR	18 ¹⁵ / ₁₆
12	09	Prefix(t)-12-09-(*)-HLR	15 ¹⁵ / ₁₆
12	06	Prefix(t)-12-06-(*)-HLR	13 ³ / ₄
09	06	Prefix(t)-09-06-(*)-HLR	13 ³ / ₄


Straight reducer



Offset reducer – right

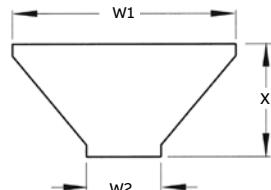


Offset reducer – left



(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

Part numbering system

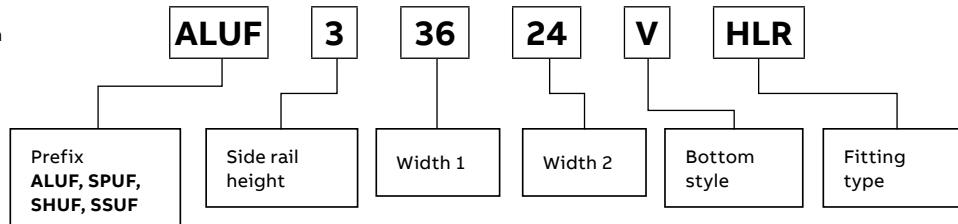

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 36, 30, 24, 18, 12, 09 in.
- Tray widths W2: 30, 24, 18, 12, 09, 06 in.
- Bottom styles: V – ventilated, S – solid
- Side rail height: 2, 3, 6 in.

One-piece tray

45° Horizontal wye fittings



45° Horizontal wye


Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Bottom styles: V – ventilated, S – solid
- Side rail height: 2, 3, 6 in.

Width (in.)	Left-hand wye cat. no.	Right-hand wye cat. no.	Dimensions (in.)		
	X	Y	Z		
06	Prefix(†)-06-(*)-HYL	Prefix(†)-06-(*)-HYR	18 $\frac{5}{16}$	14 $\frac{13}{16}$	12 $\frac{7}{16}$
09	Prefix(†)-09-(*)-HYL	Prefix(†)-09-(*)-HYR	22 $\frac{17}{32}$	19 $\frac{29}{32}$	15 $\frac{7}{16}$
12	Prefix(†)-12-(*)-HYL	Prefix(†)-12-(*)-HYR	26 $\frac{3}{4}$	25	18 $\frac{7}{16}$
18	Prefix(†)-18-(*)-HYL	Prefix(†)-18-(*)-HYR	35 $\frac{1}{4}$	35 $\frac{1}{4}$	24 $\frac{7}{16}$
24	Prefix(†)-24-(*)-HYL	Prefix(†)-24-(*)-HYR	43 $\frac{1}{2}$	45 $\frac{1}{2}$	30 $\frac{7}{16}$
30	Prefix(†)-30-(*)-HYL	Prefix(†)-30-(*)-HYR	52 $\frac{1}{4}$	55 $\frac{1}{4}$	36 $\frac{7}{16}$
36	Prefix(†)-36-(*)-HYL	Prefix(†)-36-(*)-HYR	60 $\frac{11}{16}$	66	42 $\frac{7}{16}$


Left hand wye

Right hand wye

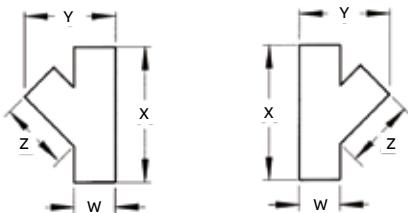

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 2 pairs of splice plates with hardware.

Part numbering system

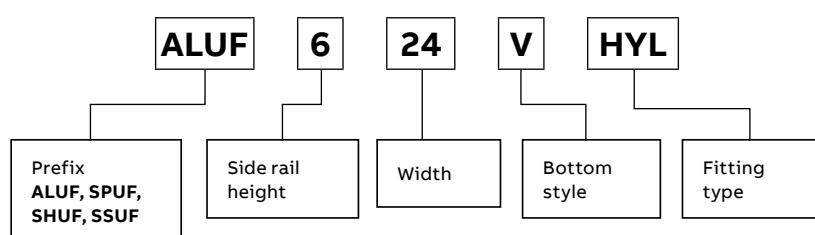

One-piece tray

Vertical tee up/down fittings

Vertical tee up/down


	Nominal radius (in.)	Nominal width (in.)	Vertical tee up cat. no.	Vertical tee down cat. no.	Dimensions (in.)					
					Side rail height "D"					
					2 in.		3 in.		6 in.	
	X	Y	X	Y	X	Y	X	Y	X	Y
Ventilated	12	06	Prefix(t)-06-(*)-VTU12	Prefix-06-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	09	Prefix(t)-09-(*)-VTU12	Prefix-09-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	12	Prefix(t)-12-(*)-VTU12	Prefix-12-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	18	Prefix(t)-18-(*)-VTU12	Prefix-18-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	24	Prefix(t)-24-(*)-VTU12	Prefix-24-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	30	Prefix(t)-30-(*)-VTU12	Prefix-30-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	36	Prefix(t)-36-(*)-VTU12	Prefix-36-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
Down	24	06	Prefix(t)-06-(*)-VTU24	Prefix-06-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	09	Prefix(t)-09-(*)-VTU24	Prefix-09-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-VTU24	Prefix-12-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-VTU24	Prefix-18-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	24	Prefix(t)-24-(*)-VTU24	Prefix-24-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-VTU24	Prefix-30-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-VTU24	Prefix-36-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ¹ / ₈	27 ¹ / ₈	54 ³ / ₁₆
Solid	36	06	Prefix(t)-06-(*)-VTU36	Prefix-06-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	09	Prefix(t)-09-(*)-VTU36	Prefix-09-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	12	Prefix(t)-12-(*)-VTU36	Prefix-12-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	18	Prefix(t)-18-(*)-VTU36	Prefix-18-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	24	Prefix(t)-24-(*)-VTU36	Prefix-24-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	30	Prefix(t)-30-(*)-VTU36	Prefix-30-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	36	Prefix(t)-36-(*)-VTU36	Prefix-36-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
Up										

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 2 pairs of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail height: 2, 3, 6 in.

Part numbering system

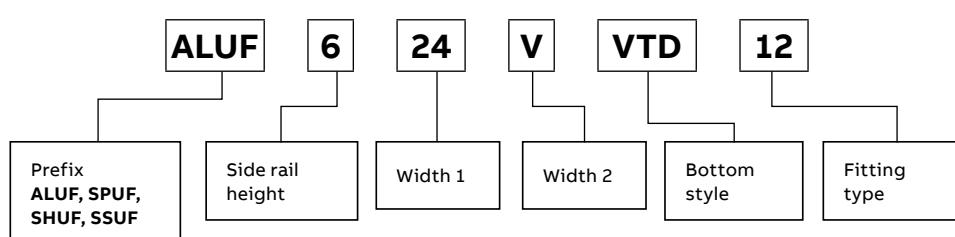

One-piece tray

Cable support fittings

Cable support


Nominal radius (in.)	Nominal width (in.)	Cat. no.	Side rail height "D"		
			2 in.	3 in.	6 in. X (in.)
12	06	Prefix(†)-06-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	09	Prefix(†)-09-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	12	Prefix(†)-12-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	18	Prefix(†)-18-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	24	Prefix(†)-24-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	30	Prefix(†)-30-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
12	36	Prefix(†)-36-(*)-CS12	13 $\frac{1}{8}$	15 $\frac{5}{8}$	18 $\frac{3}{16}$
24	06	Prefix(†)-06-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	09	Prefix(†)-09-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	12	Prefix(†)-12-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	18	Prefix(†)-18-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	24	Prefix(†)-24-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	30	Prefix(†)-30-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
24	36	Prefix(†)-36-(*)-CS24	25 $\frac{1}{8}$	27 $\frac{5}{8}$	30 $\frac{3}{16}$
36	06	Prefix(†)-06-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	09	Prefix(†)-09-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	12	Prefix(†)-12-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	18	Prefix(†)-18-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	24	Prefix(†)-24-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	30	Prefix(†)-30-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$
36	36	Prefix(†)-36-(*)-CS36	37 $\frac{1}{8}$	39 $\frac{5}{8}$	42 $\frac{3}{16}$

(†) Insert side rail height. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 06, 09, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V—ventilated, S—solid
- Side rail height: 2, 3, 6 in.


Part numbering system

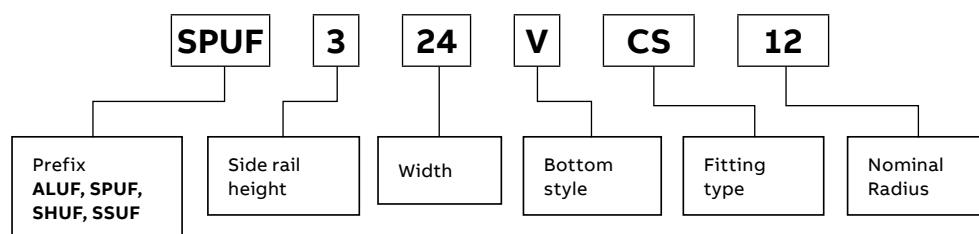

One-piece tray covers


Straight and fitting covers

Straight cover number selection

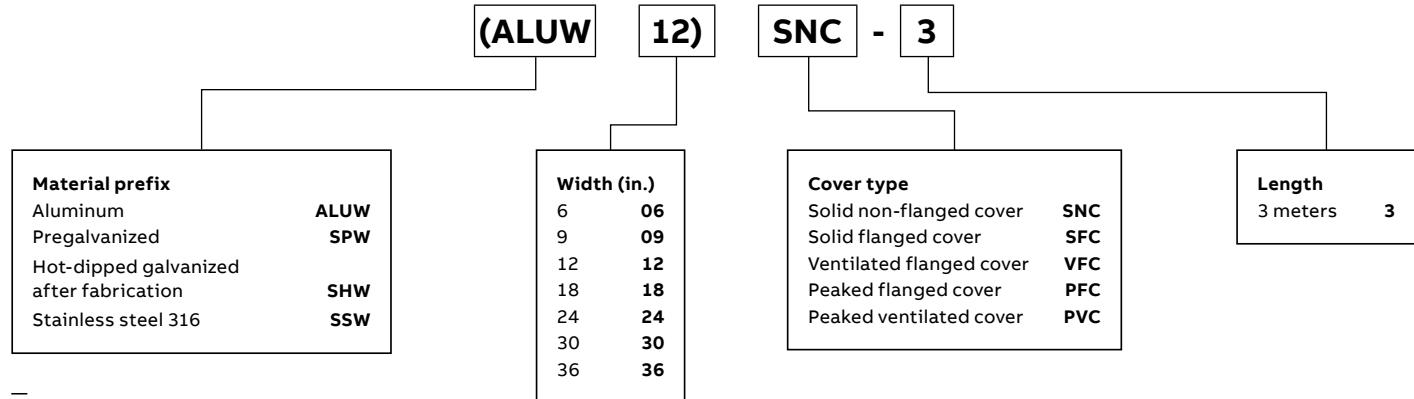

* For SHW covers,
maximum lengths are
72 in. and 1500 mm.

Fitting cover number selection

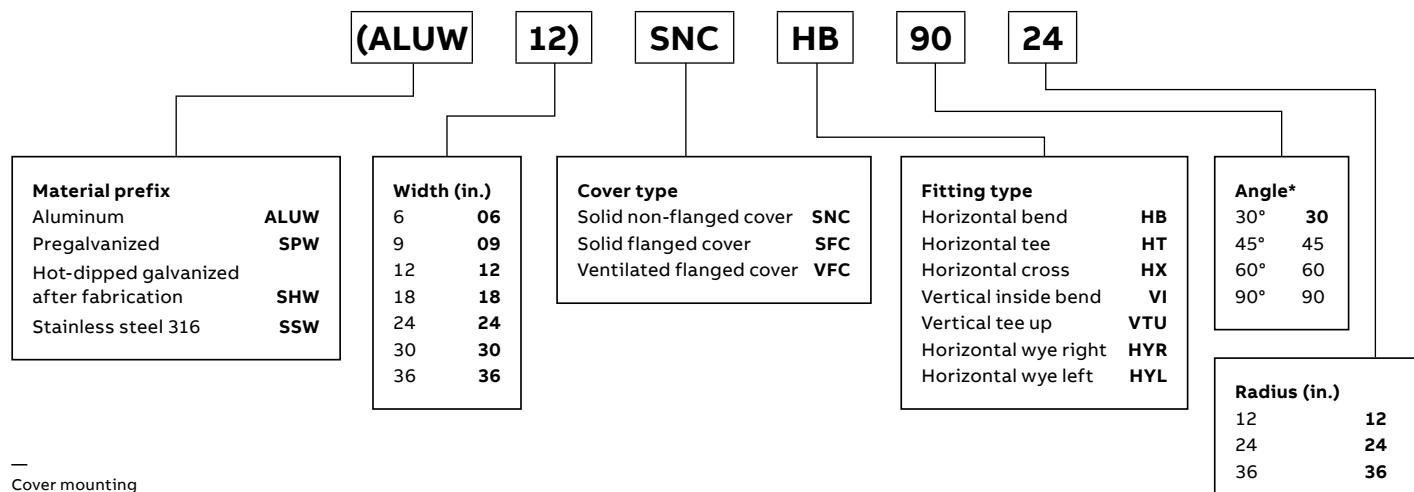


—
Cover mounting
hardware sold separately.

* Required for HB
and VI only.


One-piece tray covers

Fitting covers

Fitting cover number selection (continued)

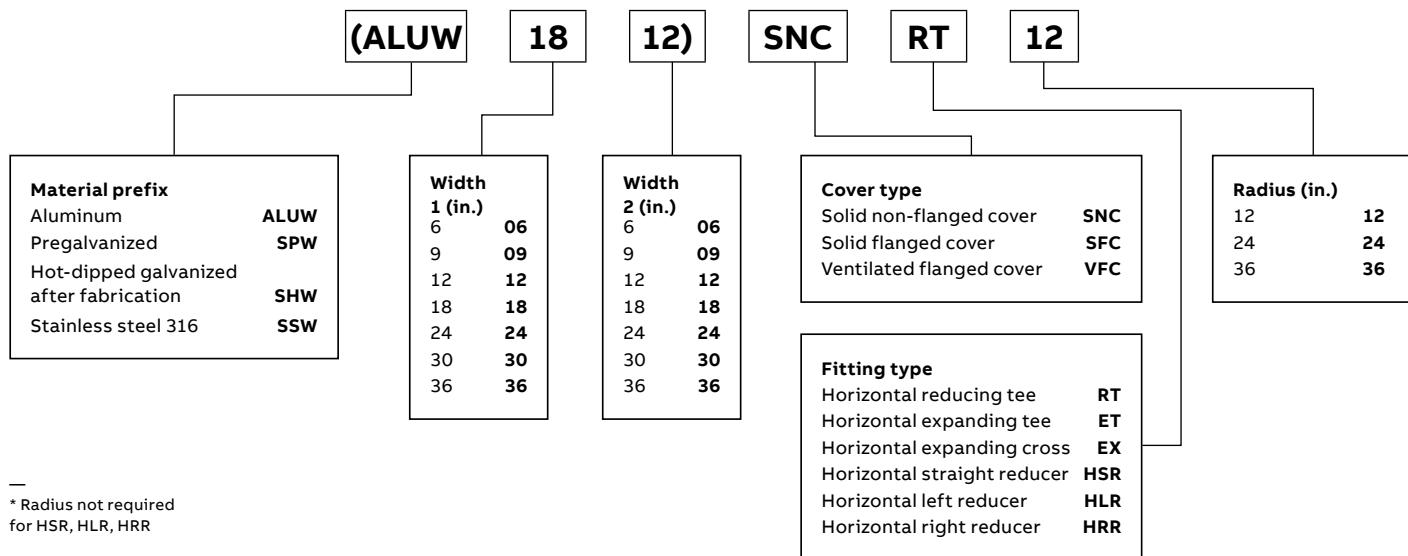

* Radius not required for HSR, HLR, HRR

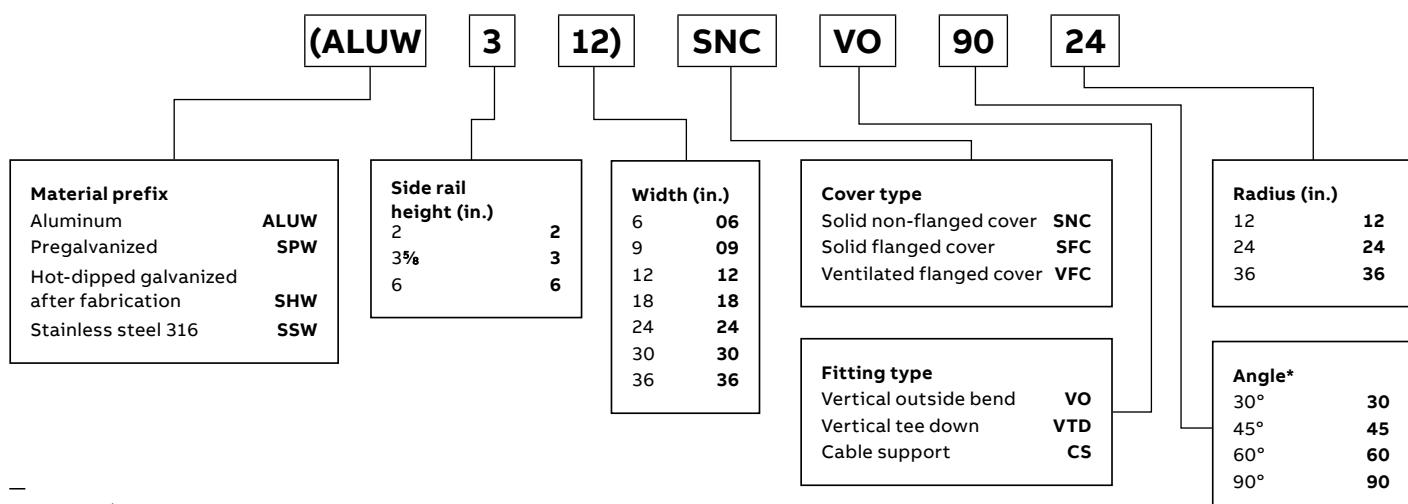


— Cover mounting hardware sold separately.

* Required for VO only.

One-piece tray covers


Accessories for covers

Hold-down clamp

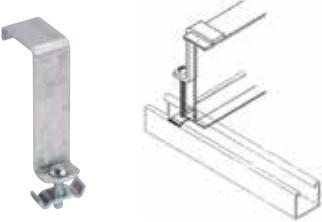	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2-HDC	SPUW, SSUW, SHUW	2
	(Prefix)-3-HDC	SPUW, SSUW, SHUW	3
	(Prefix)-6-HDC	SPUW, SSUW, SHUW	6

Designed to secure cable tray to support system.

Cover clamp

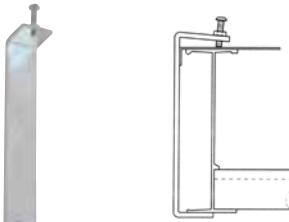	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2-SCC	SPUW, SSUW	2
	(Prefix)-3-SCC	SPW, SSW	3
	(Prefix)-6-SCC	SPW, SSW	6

Rigid cover clamp for flat and flanged covers.

Selection guide

- Tray widths: 06, 09, 12, 18, 24, 30, 36 in.

Heavy-duty cover clamp

	Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
	(Prefix)-2-**-HCC	ALUW, SPUW, SSUW, SHUW	2	06 to 36
	(Prefix)-3-**-HCC	ALUW, SPW, SHW, SSW	3	06 to 36
	(Prefix)-6-**-HCC	ALUW, SPW, SHW, SSW	6	06 to 36

One-piece tray splice plates

Standard, expansion splice plate and reducing splice



- Packaged in pairs with hardware
- Kit contents: 8 bolts, 8 serrated flange nuts 3/8 in. diameter
- Provided as standard with each straight and/or fitting

Standard splice plate

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2-SSP	ALUW, SPUW, SSUW, SHUW	2
(Prefix)-3-SSP	ALUW, SPW, SSW, SHW	3
(Prefix)-6-SSP	ALUW, SPW, SSW, SHW	6



- Allows for a 1 in. expansion or contraction of tray system
- Packaged in pairs with hardware
- Kit contents: 8 bolts, 4 stop nuts, 4 serrated flange nuts 3/8 in. diameter

Expansion splice plate

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2-ESP	ALUW, SPUW, SSUW, SHUW	2
(Prefix)-3-ESP	ALUW, SPW, SSW, SHW	3
(Prefix)-6-ESP	ALUW, SPW, SSW, SHW	6



- Used in pairs to provide a straight reduction or used with a standard splice plate for an offset reduction
- One per package with hardware
- Kit contents: 4 bolts, 4 nuts

Reducing splice

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2(*)-RSP	ALUW, SPUW, SSUW, SHUW	2
(Prefix)-3(*)-RSP	ALUW, SPW, SSW, SHW	3
(Prefix)-6(*)-RSP	ALUW, SPW, SSW, SHW	6

*Note: For offset reduction: Insert width to be reduced. For straight reduction: Insert $\frac{1}{2}$ width to be reduced (2 required)
Example: ALUW-603-RSP = 3 in. offset reducer

One-piece tray barrier strips

Horizontal and vertical barriers strips, barrier clamp and splice strips



SBH



SB

Horizontal barrier strips

- Barrier strips provide a method of separating cables in tray and trough systems
- Easily installed using supplied hardware or barrier strip clamps (sold separately)
- 72 in. barriers are flexible for use with horizontal fittings

Cat. no.	Material prefix	Height (in.)	Length
(Prefix)-2-SB-3	ALUW, SPUW, SHUW*, SSUW	2	3 m
(Prefix)-3-SB-3	ALUW, SPUW, SHUW*, SSUW	3	3 m
(Prefix)-6-SB-3	ALUW, SPUW, SHUW*, SSUW	6	3 m
(Prefix)-2-SBH-72	ALUW, SPUW, SHUW*, SSUW	2	72 in.
(Prefix)-3-SBH-72	ALUW, SPUW, SHUW*, SSUW	3	72 in.
(Prefix)-6-SBH-72	ALUW, SPUW, SHUW*, SSUW	6	72 in.

NOTE: 72 in. barriers provided with 3 SPW10SCR, 3 m barriers provided with 6 SPW10SCR

*Available in 1500 mm only.



Vertical barriers strips

- Preformed to fit all standard steel vertical bends.
- Provided with hardware
- Height 2, 3, 6 in.
- Angle 30, 45, 60, 90°
- Radius 12, 24, 36 in.

Inside bend cat. no.	Outside bend cat. no.	Material prefix	Height (in.)	Angle (°)	Radius (in.)
(Prefix)-2-VIB-(*)-(**)	Prefix-2-VOB-(*)-(**)	ALUW, SPUW, SHUW†, SSUW	2 to 6	30 to 90	12 to 36
(Prefix)-3-VIB-(*)-(**)	Prefix-3-VOB-(*)-(**)	ALUW, SPUW, SHUW†, SSUW	2 to 6	30 to 90	12 to 36
(Prefix)-6-VIB-(*)-(**)	Prefix-6-VOB-(*)-(**)	ALUW, SPUW, SHUW†, SSUW	2 to 6	30 to 90	12 to 36
		ALUW, SPUW, SHUW†, SSUW	2 to 6	30 to 90	12 to 36

(* Insert angle (**)) Insert radius. †Available in 1500 mm only.

- Barrier strip clamps mount barrier strips to ladder rungs and ventilated bottoms
- Complete mounting hardware supplied

Barrier strip clamp

Cat. no.	Material
SPW-BSC	Zinc-plated steel
SSW-BSC	Stainless steel 316

Barrier strip splice

Cat. no.	Material prefix
ABW-BSS	SPW
	SPW

Alignment splice for joining connecting barrier strips.

One-piece tray accessories

Closure end plate and drop out

Closure end plate

- Tray width: 06, 09, 12, 18, 24, 30, 36 in.

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-2-**-CEP	ALUW, SPUW, SHUW, SSUW	2	06 to 36
(Prefix)-3-**-CEP	ALUW, SPW, SSW, SHW	3	06 or 36
(Prefix)-6-**-CEP	ALUW, SPW, SSW, SHW	6	06 or 36

Provides closure for any tray end. Hardware included.

** Insert tray width

Drop out

- Designed to provide a smooth radius surface at any position on the tray or trough bottom
- Drop outs are easily attached using hardware provided
- Standard radius = 4 in.
- Width : 06, 09, 12, 18, 24, 30, 36 in.

Cat. no.	Material prefix	Width (in.)
(Prefix)-**-DOS	ALUW, SPW, SHW, SSW	06 to 36

** Insert tray width

One-piece tray accessories

Steel tray hardware, horizontal and vertical adjustable plates

Steel tray hardware

Cat. no.	Material	Description
SPW-1/4-CB	Zinc-plated steel	¼ in. carriage bolt
SPW-3/8-CB	Zinc-plated steel	⅜ in. carriage bolt
SPW-1/4-HN	Zinc-plated steel	¼ in. serrated flange nuts
SPW-3/8-HN	Zinc-plated steel	⅜ in. serrated flange nuts
SSW-3/8-CB	316 stainless	⅜ in. carriage bolt
SSW-3/8-HN	316 stainless	⅜ in. hex. nut
SSW-3/8-HWK*	316 stainless	316 stainless steel hardware kit

Square shoulder self-positioning carriage bolt.

* Hardware kit: Contains 8 serrated flange nuts, 8 bolts.

Flexible coupler

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-(*)(**)-HAP	ALUW, SPUW, SSUW, SHUW	2, 3, 6	06 to 36

(*) Insert side rail height

(**) Insert tray width

- Adjustable hinge plates provide maximum horizontal installation flexibility.
- Furnished as a kit with hardware.
- Tray widths : 06, 09, 12, 18, 24, 30, 36 in.

Vertical adjustable plate

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-*-**-VSP	ALUW, SPUW, SSUW, SHUW	2, 3, 6	06 to 36

*Insert side rail height

**Insert width

- Adjustable hinge plates provide maximum horizontal installation flexibility for elevation changes
- Furnished as a kit with hardware
- Tray widths : 06, 09, 12, 18, 24, 30, 36 in.

One-piece tray covers accessories

Horizontal tee branch and box-to-tray plates

Horizontal tee branch

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-(*)-(**)-HTB	ALUW, SPUW, SSUW, SHUW	2, 3, 6	06 to 36


(*) Insert side rail height
 (**) Insert width



- Designed to secure tray to electrical panels or boxes, walls or end supports
- Packaged in pairs with hardware
- Tray widths : 06, 09, 12, 18, 24, 30, 36 in.

Box-to-tray plates

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2-BSP	ALUW, SPUW, SSUW, SHUW	2
(Prefix)-3-BSP	ALUW, SPW, SSW, SHW	3
(Prefix)-6-BSP	ALUW, SPW, SSW, SHW	6



- Designed to secure tray to electrical panels or boxes, walls or end supports
- Packaged in pairs with hardware