

New product

EFXPR LED Series

Remote fixtures hazardous locations



Features

- CSA Certified for use in hazardous locations:
 - Class I, Divisions 1 and 2, Groups C, D
 - Class II, Divisions 1 and 2, Groups E, F, G
 - Class III
- High efficacy LED lamps
- Die-cast aluminum body with grey epoxy powder coat finish
- Clear, impact and heat resistant prismatic glass globe
- Available in 6, 12, 24 and 120V
- Available with single-lamp or twin-lamp combination
- T6 – maximum 85°C (185°F) temperature rating
- Meets or exceeds C22.2 No. 137-M1981
- Meets or exceeds CSA 22.2 No. 141
- **Warranty details at: www.emergi-lite.ca**

Typical specifications

Supply and install the **Emergi-Lite® EFXPR LED Series** of hazardous location remote heads. The head housing will be die-cast aluminum with grey epoxy powder coat finish. The lens shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed. External seals shall not be required.

The remote shall come complete with a mounting connection and include _____ lamp(s) rated _____ V, _____ W. The remote head shall be suitable for Class , Division , Group .

The remote unit shall be **Emergi-Lite®** model: _____ .

Replacement lamps

Ordering code	Lamp type	Voltage/wattage
580.0097-E	LED	6V-4W
580.0122-E	LED	6V-5W
580.0104-E	LED	12V-5W
580.0106-E	LED	12V-6W
580.0098-E	LED	24V-4W
580.0095-E	LED	120V-4W




EFXPR LED Series

Remote fixtures hazardous locations

Dimensions

Dimensions are approximate and subject to change.

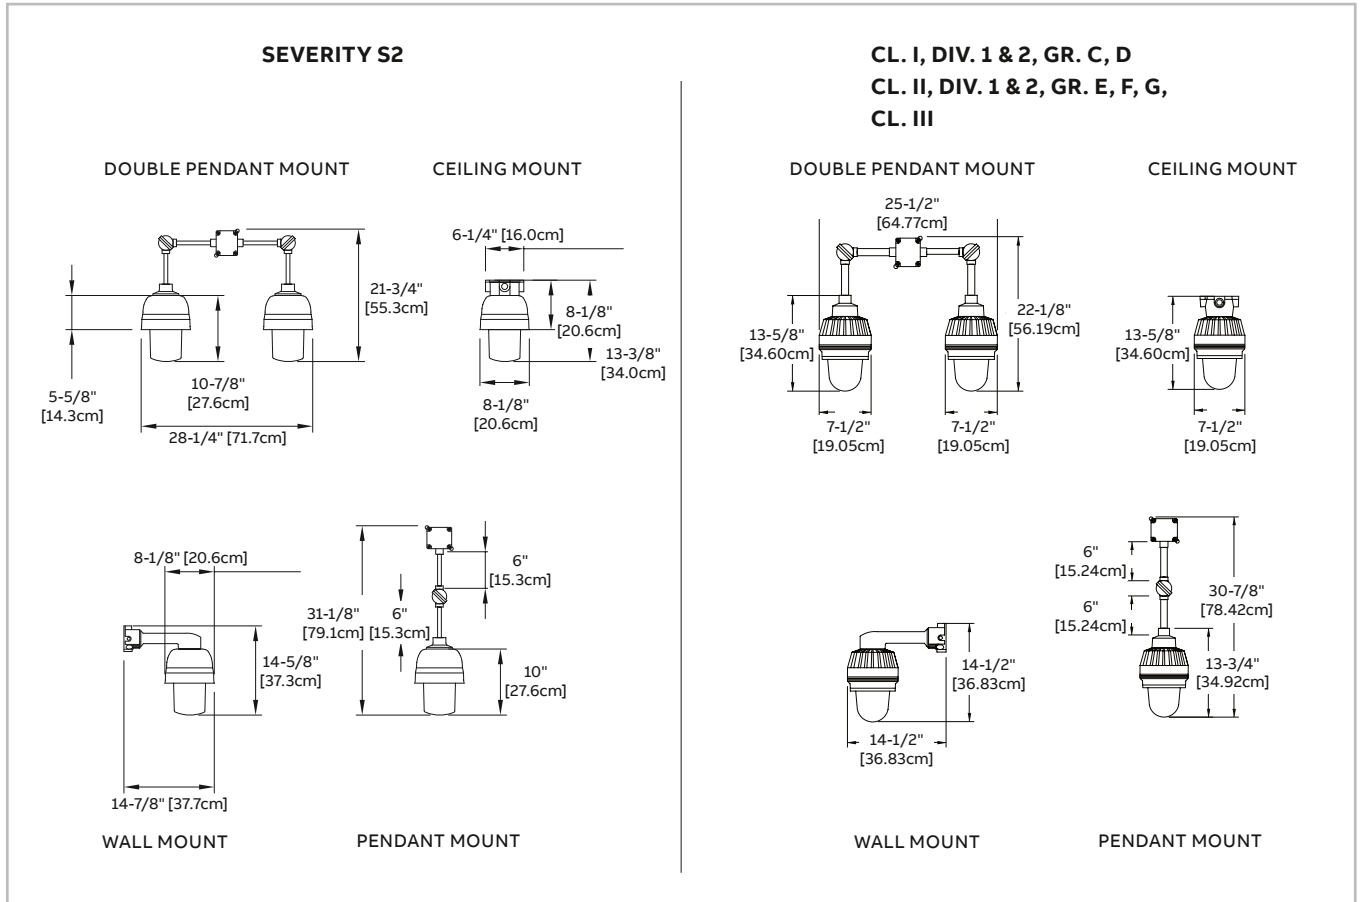

REMOTE FIXTURES

Ordering information

Series	Mounting	# of lamps	Severity code	Lamp wattage/type
EFXPR	C= ceiling mount	11= single remote, one lamp	Blank= Cl.I, Div. 1 & 2, Gr. C, D	-LA= 6V-4W, MR16 LED
	P= pendant mount	12= single remote, two lamps	Cl.II, Div. 1 & 2, Gr. E, F, G,	-LB= 6V-5W, MR16 LED
	W= wall mount	21= double remote, one lamp each ¹	Cl.III	-LG= 12V-4W, MR16 LED
				-LI= 12V-5W, MR16 LED
			S2= Cl.I, Div.1, Gr. C, D	-LJ= 12V-6W, MR16 LED
				-LL= 24V-4W, MR16 LED
				-LV= 120V-4W, GU10 LED

Example: EFXPRP11-LA

¹Pendant mount only.