


BD Series

200 A (main lugs) 600 V; multiple position – 200 A per position




Product specifications

- Conductor range: line: 6 AWG–250 kcmil, load: 6 AWG–250 kcmil
 - Aluminum tunnel type connectors for both load and line sides
 - Factory prebussed from main lugs to each position
- Supplied with hub opening closure plate for underground service
 - Combination overhead/underground
 - Supplied with screw type rings
 - Weatherproof Type 3R enclosure



	Cat. no.	Positions	Dimensions (in.)			Weight		
			H	W	D	lb	kg	
	4 Jaw							
	Left-hand entry Right-hand entry							
	BD2-V	BD2-VH	2	15 ⁹ / ₁₆	17½	5 ⁷ / ₁₆	23	10.4
	BD3-V	BD3-VH	3	15 ⁹ / ₁₆	26¼	5 ⁷ / ₁₆	35	15.9
	BD4-V	BD4-VH	4	15 ⁹ / ₁₆	35	5 ⁷ / ₁₆	47	21.3
	BD2-VBC	BD2-VBCH	2 (for British Columbia)	20¼	17½	5 ⁷ / ₁₆	27	12.2

Diagrams

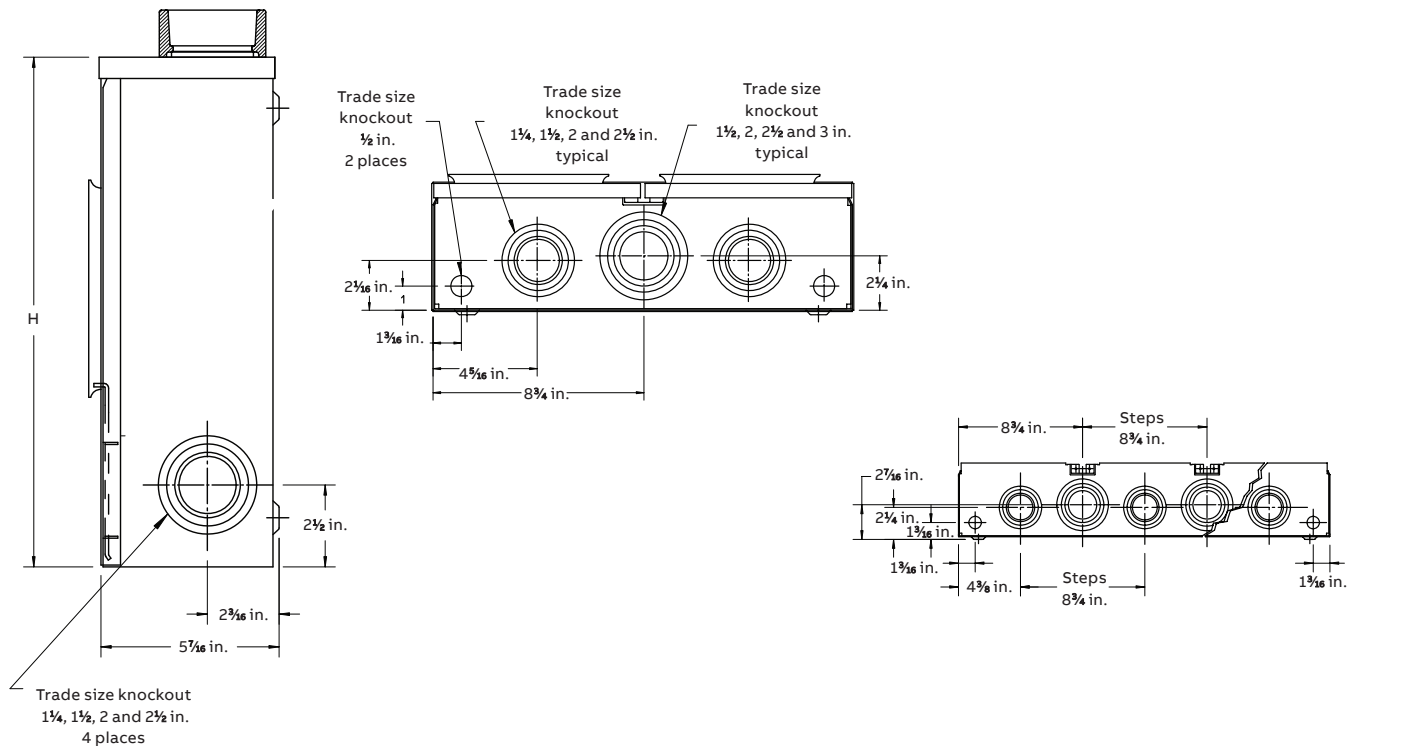

Note: Pattern for bottoms. Left-hand entry is shown. For right-hand entry, unit is manufactured symmetrically with hub openings, knockout and line connections on right side.

BDA2-V Series

200 A (main lugs) 600 V; multiple position with blank compartment
200 A per position




- Product specifications**

 - Conductor range: line: 1 x 6 AWG-250 kcmil, load: 6 AWG-250 kcmil
 - Aluminum tunnel type connectors for load side
 - Combination overhead/underground
 - Hub opening closure plate for underground service
- Supplied with screw type rings
 - Weatherproof Type 3R enclosure

 Approved for copper or aluminum


	Cat. no.	Positions	Dimensions (in.)			Weight	
			H	W	D	lb	kg
	4 Jaw						
	Left-hand entry		Right-hand entry				
	BDA2-V	BDA2-VH	2	15 ⁵ / ₈	26 ³ / ₁₆	5 ¹ / ₄	31 14.6

Diagrams

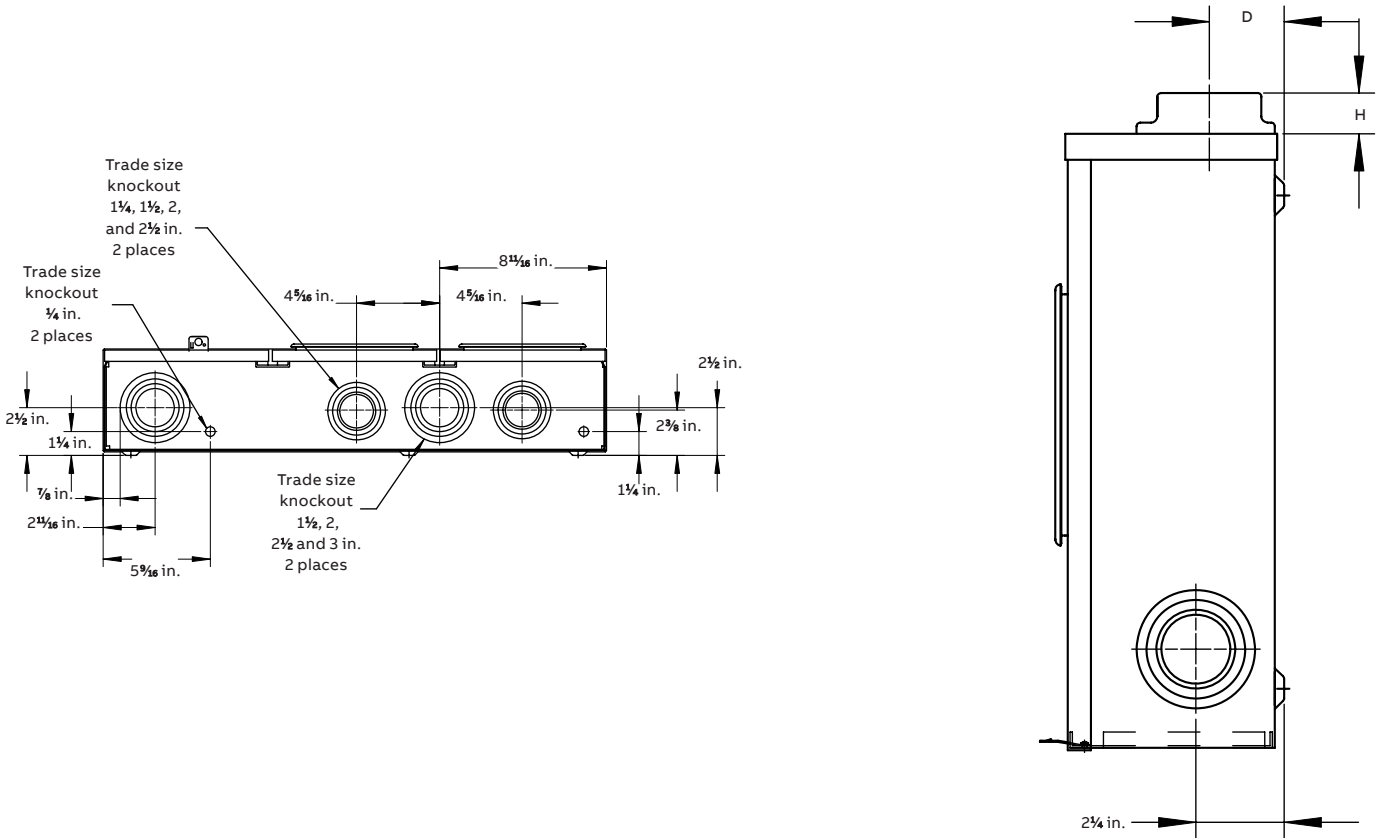


BDC Series

200 A (main lugs) 600 V; stud type multiple position with blank compartment
200 A per position

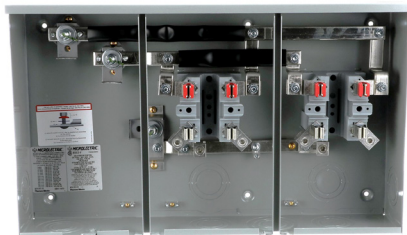

BDC2-V


For use in all provinces



Cat. no.		Dimensions (in.)				Weight	
Left-hand entry	Right-hand entry	Positions	H	W	D	lb	kg
4 Jaw							
BDC2-V	BDC2-VH	2	15 ⁵ / ₈	26 ³ / ₄	5 ¹ / ₄	30	13.6
BDC3-V	BDC3-VH	3	15 ⁵ / ₈	35	5 ¹ / ₄	42	19.0
BDC4-V	BDC4-VH	4	15 ⁵ / ₈	43 ³ / ₄	5 ¹ / ₄	54	24.5

Locking system outside meter section.

For use in British Columbia




Cat. no.		Dimensions (in.)				Weight	
Left-hand entry	Right-hand entry	Positions	H	W	D	lb	kg
4 Jaw							
BDC2-VAILBC	BDC2-VAHILBC	2	20 ³ / ₄	26 ³ / ₄	5 ¹ / ₄	30	13.6
BDC3-VAILBC	BDC3-VAHILBC	3	20 ³ / ₄	35	5 ¹ / ₄	42	13.6
BDC4-VAILBC	BDC4-VAHILBC	4	20 ³ / ₄	43 ³ / ₄	5 ¹ / ₄	54	19.0

Locking system inside meter section, comes with tunnel type connector on line side.

Product specifications

- Conductor range: line: single ½ in. studs to accommodate compression lugs (supplied by utility), load: 6 AWG–250 kcmil
- Aluminum tunnel type connectors for load sides
- For underground service only
- Factory prebussed from main lugs to each position
- Supplied with screw type sealing rings
- Weatherproof Type 3R enclosure
- Permanently bonded neutral assembly


For use in Quebec



Cat. no.		Dimensions (in.)				Weight	
Left-hand entry	Right-hand entry	Positions	H	W	D	lb	kg
4 Jaw							
BDC2-VIL	BDC2-VHIL	2	15 ⁵ / ₈	26 ³ / ₄	5 ¹ / ₄	30	13.6
BDC3-VIL	BDC3-VHIL	3	15 ⁵ / ₈	35	5 ¹ / ₄	42	19.0
BDC4-VIL	BDC4-VHIL	4	15 ⁵ / ₈	43 ³ / ₄	5 ¹ / ₄	54	24.5

Locking system inside meter section.




For use in Ontario



Cat. no.		Dimensions (in.)			Weight	
Left-Hand Entry	Positions	H	W	D	lb	kg
5 Jaw						
BDC2-5V	2	15 ⁵ / ₈	26 ³ / ₄	5 ⁷ / ₁₆	30	13.6
BDC3-5V	3	15 ⁵ / ₈	35	5 ⁷ / ₁₆	42	19.0
BDC4-5V	4	15 ⁵ / ₈	43 ³ / ₄	5 ⁷ / ₁₆	54	24.5

Locking system outside meter section.

Diagrams

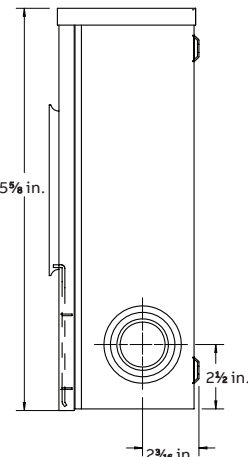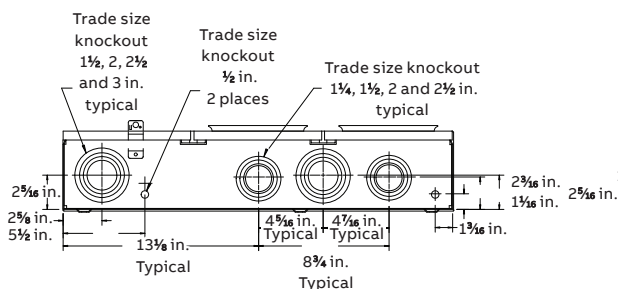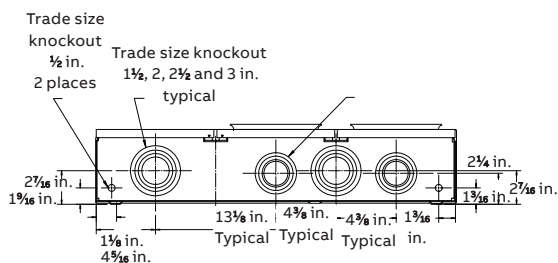

Note: Pattern for bottoms. Left-hand entry is shown.
For right-hand entry, unit is manufactured symmetrically with hub openings, knockouts for line connectors on right side.