SPRING STEEL FASTENERS

Steel City® Carlon®

SPRING STEEL FASTENERS

TABLE OF CONTENTS

Technical information	04
Catalogue numbering system	05
Beams, purlin and hangers	06
Conduit and cable supports	14
Stud wall and drywall	26
Acoustical tee supports	35
Low voltage/telecommunication supports	43
Accessories	49
Cross reference	53

Steel City hangers, clamps and fasteners
Overview

Materials

The following materials are used for Steel City spring steel fasteners:

- **High carbon spring steel**
  Spring steel products are manufactured using high carbon, cold rolled steel, AISI C1075 or equivalent. The final part is heat treated to give the formed product great resilience and strength.
- **Low carbon steel**
  Mild steel products are manufactured using low carbon, cold rolled steel, AISI C1008 or equivalent. Such parts receive an application of zinc or paint to protect the finished product.

Finishes

- **Zinc phosphate**
  The zinc phosphate finish is per MIL-SPEC-16232, type Z. This finish includes a zinc phosphate base with a supplementary sealant applied. The finished product will withstand 24 to 72 hours of saltspray testing in accordance with ASTM B117.
- **Pregalvanized**
  Products receiving a pregalvanized finish are low carbon steel products with a coating of zinc applied to the steel prior to part fabrication. This finish is in conformance with ASTM A525.
- **Electrogalvanized**
  The electrogalvanized finish is a zinc finish which includes an electro-plated layer of zinc and then a zinc chromate. This finish is applied after fabrication and is in conformance with ASTM B633.
- **Painted**
  Some products in the Steel City line receive a painted finish. Parts are painted for applications that require alternate colours to the standard black zinc phosphate (such as acoustical ceilings).

Load ratings

The Steel City spring steel fasteners products shown in this catalogue have a load limit based on the following:

- **Static load limit**
  Such products show the load limit that is based on a safety factor of 3.
- **Ultimate static load limit**
  Such products show the load limit that is the highest load allowed.

These load limits apply only to catalogue numbers that list such a limit. For both instances, the static load limits apply only in the orientation described in the catalogue or instruction sheet. These loads apply only to the fastener; the structure to which it will be attached must be evaluated separately.

Catalogue numbering system

Individual part numbering system

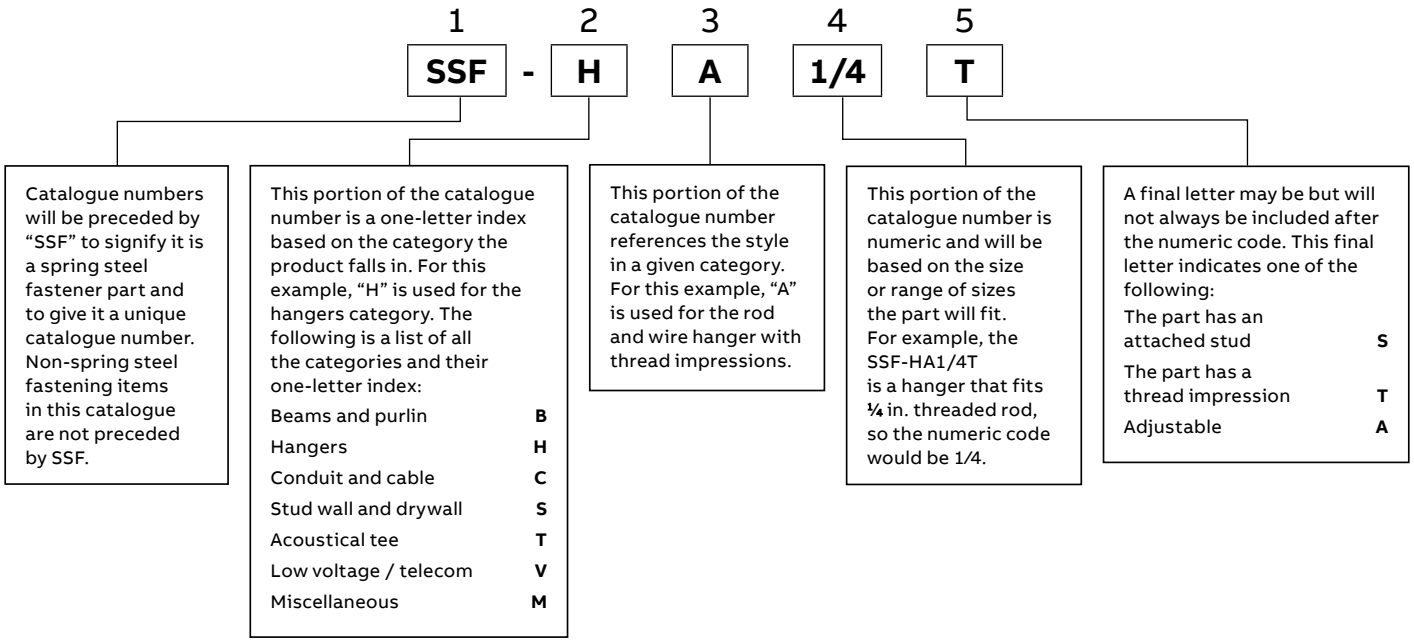

Riveted combinations

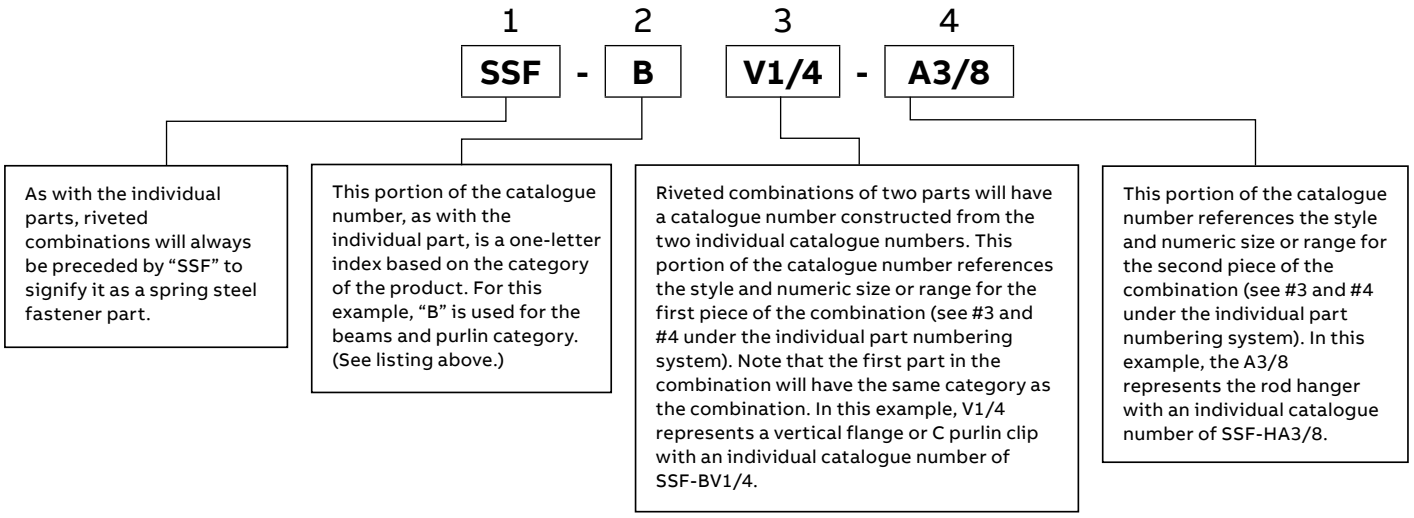

Beams, purlin and hangers

Beam clamps


Fig. 1


Fig. 2


Fig. 3


Fig. 5

SSF-BBC series

- Fits beam flanges to ½ in.
- Supports ¼ in. and ⅜ in. threaded rods, S-hooks, electrical boxes, conduit and bridle rings
- ¼ in.-20 or #10-24 threaded openings

Beam clamps

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BBC	1	Stamped steel beam clamp	100	100
SSF-BBC-S1/2V*	2	Beam clamp through ½ in. flange to conduit clamp, ½ in conduit	25	25
SSF-BBC-S3/4V*	2	Beam clamp through ½ in. flange to conduit clamp, ¾ in. conduit	25	25
SSF-BBC-S1V*	2	Beam clamp through ½ in. flange to conduit clamp, 1 in. conduit	25	25
SSF-BBC-S1/2H*	3	Beam clamp through ½ in. flange to side mounted conduit clamp,½ in. conduit	15	25
SSF-BBC-S3/4H*	3	Beam clamp through ½ in. flange to side mounted conduit clamp,¾ in. conduit	15	25
SSF-BBC-S1H*	3	Beam clamp through ½ in. flange to side mounted conduit clamp,1 in. conduit	15	25
SSF-BBC-C1/2 3/4V	4	Beam clamp through ½ in. flange to conduit clamp, ½ in.–¾ in. conduit	100	25
SSF-BBC-C1V	4	Beam clamp through ½ in. flange to conduit clamp, 1 in. conduit	100	25
SSF-BBC-C1 1/4V	4	Beam clamp through ½ in. flange to conduit clamp, 1¼ in. conduit	100	25
SSF-BBC-C1 1/2V	4	Beam clamp through ½ in. flange to conduit clamp, 1½ in. conduit	100	25
SSF-BBC-C2V	4	Beam clamp through ½ in. flange to conduit clamp, 2 in. conduit	100	25
SSF-BBC-C1/2 3/4H	5	Beam clamp through ½ in. flange to side mounted conduit clamp, ½ in.–¾ in. conduit	25	25
SSF-BBC-C1H	5	Beam clamp through ½ in. flange to side mounted conduit clamp, 1 in. conduit	25	25
SSF-BBC-C1 1/4H	5	Beam clamp through ½ in. flange to side mounted conduit clamp, 1¼ in. conduit	25	25
SSF-BBC-C1 1/2H	5	Beam clamp through ½ in. flange to side mounted conduit clamp, 1½ in. conduit	25	25
SSF-BBC-C2H	5	Beam clamp through ½ in. flange to side mounted conduit clamp, 2 in. conduit	25	25

Fig. 1

Fig. 2

Fig. 3

Fig. 4

Fig. 5

* UL/cUL not applicable

Beams, purlin and hangers

Beam clamps



Fig. 1 and 2

SSF-BH series

- Hangs on box from the underside or to the front of beam flanges
- When used with combination conduit hanger, the conduit run lines up with “knock-outs” in outlet box and eliminates offsets and bends
- ¼ in.-20 threaded opening
- Also available with staked stud, ¼ in.-20 x ⅜ in. to provide easier attachment of outlet boxes to beams – eliminates having to use loose screws
- Supports 100 lb static vertical load limit
- Installs easily with a hammer

Hammer-on flange clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BH1/4	1	Clip without stud, ⅛ in.–¼ in. flange thickness	100	100
SSF-BH1/2	1	Clip without stud, 5⁄16 in.–½ in. flange thickness	100	100
SSF-BH1/4S	2	Clip with stud, ⅛ in.–¼ in. flange thickness	100	100
SSF-BH1/2S	2	Clip with stud, 5⁄16 in.–½ in. flange thickness	100	100

Fig. 1

Fig. 2



Fig. 3



Fig. 4

SSF-BF and SSF-BFF series

- Clips fit most bulb tees and beam flanges
- ¼ in. hole provided
- Installs easily with a hammer

Hammer-on flange clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BF1/8	3	Clip fits 3⁄32 in.– 9⁄64 in. flange thickness	160	100
SSF-BF1/4	3	Clip fits ⅛ in.– ¼ in. flange thickness	200	100
SSF-BF1/2	3	Clip fits 5⁄16 in.– ½ in. flange thickness	200	100
SSF-BF3/4	3	Clip fits 9⁄16 in.– ¾ in. flange thickness	200	100
SSF-BFF1/8	4	Clip with horizontal tab fits 3⁄32 in.– 9⁄64 in. flange thickness	50	25
SSF-BFF1/4	4	Clip with horizontal tab fits ⅛ in.– ¼ in. flange thickness	50	25
SSF-BFF1/2	4	Clip with horizontal tab fits 5⁄16 in.– ½ in. flange thickness	50	25
SSF-BFF3/4*	4	Clip fits with horizontal tab 9⁄16 in.– ¾ in. flange thickness	50	25

Fig. 3

Fig. 4

* UL/cUL not applicable

Beams, purlin and hangers

Purlin clips



Fig. 3

SSF-BA series

- Fits Z purlin flanges 1/16 in. to 1/4 in.
- Riveted combinations support wire, rod or threaded rod from Z purlin
- Compensates for the angle of the purlin design
- Supports 100 lb static load limit
- Installs easily with a hammer

Z purlin clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BA1/4	1	Z purlin clip	100	100
SSF-BA1/4-B1/4	2	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to 1/4 in. plain rod	100	25
SSF-BA1/4-B3/8	2	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to 3/8 in. plain rod	100	25
SSF-BA1/4-B8	2	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to #8 wire	100	25
SSF-BA1/4-A1/4T	3	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to 1/4 in. threaded rod	100	25
SSF-BA1/4-A3/8	3	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to 3/8 in. threaded rod (nuts required)	100	25
SSF-BA1/4-A3/8T	3	Z purlin to wire hanger, 1/16 in.–1/4 in. flange to 3/8 in. threaded rod	100	25
SSF-BZ1	4	Z purlin clip	100	100
SSF-BZ2	5	Z purlin clip with bottom		

Fig. 1

Fig. 2

Fig. 3



Fig. 4



Fig. 5

SSF-BZ series

- Compensates for angle of purlin
- Provides method for running conduit parallel to purlin
- Fits Z purlin thicknesses up to 3/32 in.
- Supports 100 lb static load limit
- Installs easily with a hammer

Z purlin clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BZ1	4	Z purlin clip	100	100
SSF-BZ2	5	Z purlin clip with bottom	100	100



Fig. 4



Fig. 5

Beams, purlin and hangers

Purlin clips


Fig. 1


Fig. 2

SSF-BZ1 series

- Compensates for angle of purlin
- Provides method for running conduit parallel to purlin
- Fits Z purlin thicknesses up to 3⁄32 in.
- Supports 100 lb static load limit
- Installs easily with a hammer

Z purlin clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BZ1-A1/4T	1	Z purlin clip to rod hanger, 1⁄4 in. threaded rod	100	25
SSF-BZ1-A3/8T	1	Z purlin clip to rod hanger, 3⁄8 in. threaded rod	100	25
SSF-BZ1-A3/8	1	Z purlin clip to rod hanger, 1⁄4 in. and 3⁄8 in. threaded rod, nuts required	100	25
SSF-BZ1-B8	2	Z purlin clip to rod/wire hanger, #8 wire	100	25
SSF-BZ1-B1/4	2	Z purlin clip to rod/wire hanger, 1⁄4 in. threaded or plain rod	100	25
SSF-BZ1-B3/8	2	Z purlin clip to rod/wire hanger, 3⁄8 in. threaded or plain rod	100	25


Fig. 1


Fig. 2


Fig. 3


Fig. 4

SSF-BZ2 series

- Compensates for angle of purlin
- Provides method for running conduit parallel to purlin
- Fits Z purlin thicknesses up to 3⁄32 in.
- Supports 100 lb static load limit for C series and 25 lb for S series
- Installs easily with a hammer

Z purlin clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BZ2-S1/2*	3	Z purlin to snap-in style conduit clip, 1⁄2 in. conduit	100	25
SSF-BZ2-S3/4*	3	Z purlin to snap-in style conduit clip, 3⁄4 in. conduit	100	25
SSF-BZ2-S1*	3	Z purlin to snap-in style conduit clip, 1 in. conduit	100	25
SSF-BZ2-C1/2 3/4	4	Z purlin finger close style conduit clip, 1⁄2 in.–3⁄4 in. conduit	100	25
SSF-BZ2-C3/8	4	Z purlin finger close style conduit clip, 3⁄8 in. conduit	100	25
SSF-BZ2-C1	4	Z purlin finger close style conduit clip, 1 in. conduit	100	25
SSF-BZ2-C1 1/4	4	Z purlin finger close style conduit clip, 1 1⁄4 in. conduit	100	25


Fig. 3


Fig. 4

* UL and cUL not applicable

Beams, purlin and hangers

Purlin clips


Fig. 2


Fig. 3

SSF-BV1 series

- 2 sizes of C purlin clips to cover larger range of vertical flange sizes
- Riveted combinations support wire, rod or threaded rod from bar joist, C purlin
- Supports 160 lb static load limit
- Installs easily with a hammer

C purlin clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-BV1/16	1	C purlin clip fits 1/32 in. to 3/32 in. vertical flange	160	100
SSF-BV1/4	1	C purlin clip fits 3/32 in. to 9/32 in. vertical flange	160	100
SSF-BV1/16-B8	2	C purlin clip fits 1/32 in. to 3/32 in. vertical flange to #8 wire	160	25
SSF-BV1/16-B1/4	2	C purlin clip fits 1/32 in. to 3/32 in. vertical flange to 1/4 in. plain rod	160	25
SSF-BV1/16-B3/8	2	C purlin clip fits 1/32 in. to 3/32 in. vertical flange to 3/8 in. plain rod	160	25
SSF-BV1/4-B8	2	C purlin clip fits 3/32 in. to 9/32 in. vertical flange to #8 wire or 1/4 in. plain rod	160	25
SSF-BV1/4-B1/4	2	C purlin clip fits 3/32 in. to 9/32 in. vertical flange to 1/4 in. plain rod	160	25
SSF-BV1/4-B3/8	2	C purlin clip fits 3/32 in. to 9/32 in. vertical flange to 3/8 in. plain rod	160	25
SSF-BV1/16-A1/4T	3	C purlin clip fits 1/32 in. to 3/32 in. vertical flange to 1/4 in. threaded rod	160	25
SSF-BV1/16-A3/8T	3	C purlin clip fits 1/32 in. to 3/32 in. vertical flange to 3/8 in. threaded rod	160	25
SSF-BV1/4-A1/4T	3	C purlin clip fits 3/32 in. to 9/32 in. vertical flange to 1/4 in. threaded rod	160	25
SSF-BV1/4-A3/8T	3	C purlin clip fits 3/32 in. to 9/32 in. vertical flange to 1/4 in. threaded rod	160	25


Fig. 1


Fig. 2


Fig. 3

Beams, purlin and hangers

Hangers



Fig. 1

SSF-H series

- Offset bracket suspends plain rod, threaded rod or wire drops from laminated wood or concrete beams, joists, ceilings and walls
- Supports 160 lb static load limit

Rod and wire hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HB8-OB	1	Rod and wire hanger with offset bracket, #8 wire	160	25
SSF-HB1/4-OB	1	Rod and wire hanger with offset bracket, ¼ in. plain rod	160	25
SSF-HB3/8-OB	1	Rod and wire hanger with offset bracket, ⅜ in. plain rod	160	25
SSF-HA1/4-OBT	2	Rod and wire hanger with offset bracket, ¼ in. threaded rod	160	25
SSF-HA3/8-OBT	2	Rod and wire hanger with offset bracket, ⅜ in. threaded rod	160	25
SSF-HA3/8-OB	2	Rod and wire hanger with offset bracket, ¼ in.–⅜ in. threaded rod, nuts required	160	25



Fig. 1



Fig. 2



Fig. 3

SSF-HB series

- Angle bracket suspends plain rod, threaded rod or wire drops from laminated wood or concrete beams, joists, ceilings and walls
- Supports 160 lb static load limit

Rod and wire hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HB8-AB	3	Rod and wire angle bracket, #8 wire	160	25
SSF-HB1/4-AB	3	Rod and wire angle bracket hanger, ¼ in. plain rod	160	25
SSF-HB3/8-AB	3	Rod and wire angle bracket hanger, ⅜ in. plain rod	160	25



Fig. 3

Beams, purlin and hangers

Hangers



Fig. 1



Fig. 2

Plain and threaded rod hangers

- Used to suspend #8 wire, ¼ in. or ⅜ in. plain rod or ¼ in. or ⅜ in. threaded rod from beam flanges ⅛ in. to ¾ in. thick
- Supports 200 lb static load limit
- Installs easily with a hammer

Plain and threaded rod hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HB8-F1/4	1	Rod/wire to beam hanger, ⅛ in.–¼ in. flange, #8 wire	200	25
SSF-HB8-F1/2	1	Rod/wire to beam hanger, 5⁄16 in.–½ in. flange, #8 wire	200	25
SSF-HB8-F3/4	1	Rod/wire to beam hanger, 9⁄16 in.–¾ in. flange, #8 wire	200	25
SSF-HB1/4-F1/4	1	Rod/wire to beam hanger, ⅛ in.–¼ in. flange, ¼ in. plain rod	200	25
SSF-HB1/4-F1/2	1	Rod/wire to beam hanger, 5⁄16 in.–½ in. flange, ¼ in. plain rod	200	25
SSF-HB1/4-F3/4	1	Rod/wire to beam hanger, 9⁄16 in.–¾ in. flange, ¼ in. plain rod	200	25
SSF-HB3/8-F1/4	1	Rod/wire to beam hanger, ⅛ in.–¼ in. flange, ⅜ in. plain rod	200	25
SSF-HB3/8-F1/2	1	Rod/wire to beam hanger, 5⁄16 in.–½ in. flange, ⅜ in. plain rod	200	25
SSF-HB3/8-F3/4	1	Rod/wire to beam hanger, 9⁄16 in.–¾ in. flange, ⅜ in. plain rod	200	25
SSF-HA1/4-F1/4T	2	Hammer-on rod hanger, ⅛ in.–¼ in. flange, ¼ in. threaded rod	200	25
SSF-HA1/4-F1/2T	2	Hammer-on rod hanger, 5⁄16 in.–½ in. flange, ¼ in. threaded rod	200	25
SSF-HA1/4-F3/4T	2	Hammer-on rod hanger, 9⁄16 in.–¾ in. flange, ¼ in. threaded rod	200	25

Fig. 1

Fig. 2

Beams, purlin and hangers

Hangers



Fig. 3 and 4

Strap hanger clips

- Accepts strap widths up to 1⅛ in.
- Can be attached to a wide variety of products
- Supports 100 lb static load limit
- Clips are made from galvanized steel

Strap hanger clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HS	1	Strap hanger clip	200	100
SSF-HR	2	Strap hanger clip, right angle	200	100
SSF-HR-F1/4	3	Strap hanger clip, right angle, ⅛ in. –¼ in. flange thickness	200	25
SSF-HR-F1/2	3	Strap hanger clip, right angle, 5⁄16 in. –½ in. flange thickness	200	25
SSF-HR-F3/4	3	Strap hanger clip, right angle, 5⁄16 in.–¾ in. flange thickness	200	25
SSF-HS-F1/4	4	Strap hanger clip, flange thickness ⅛ in.–¼ in.	200	25
SSF-HS-F1/2	4	Strap hanger clip, flange thickness 5⁄16 in.–½ in.	200	25
SSF-HS-F3/4	4	Strap hanger clip, flange thickness 5⁄16 in.–¾ in.	200	25



Fig. 1



Fig. 2

Fig. 3

Fig. 4



Fig. 7

Miscellaneous hangers

- Rod hanger without thread impression available for ¼ in. and ⅜ in. threaded rod

Miscellaneous hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HB8	5	Rod and wire hanger, #8 wire	160	100
SSF-HB1/4	5	Rod and wire hanger, ¼ in. plain rod	160	100
SSF-HB3/8	5	Rod and wire hanger, ⅜ in. plain rod	160	100
SSF-HOB	6	Offset bracket with ¼ in. hole	160	100
SSF-HSAB	7	Short angle bracket with ¼ in. hole	160	100
SSF-HFB	8	Flat bracket with ¼ in. hole	160	100
SSF-MA7*	9	For T-grid, with 1 in. snap-in conduit clip	160	100



Fig. 5



Fig. 6



Fig. 7

Fig. 8

Fig. 9

*UL and cUL not applicable

Conduit and cable supports

Conduit supports



Fig. 1

SSF-CC series

No tools needed. Finger-friendly design.

- Available for ⅜ in. through 2 in. trade sizes for EMT, flexible conduit and MC/AC cable
- Available with either a plain hole for ¼ in. bolt or a ¼ in.-20 thread impression
- Shape of clip and clasp mechanism allows for hand installation (no tools needed)
- Unique clasp design has an aggressively angled tab and receiving hole to provide consistent, easy clasping of the clip
- Supports 100 lb static load limit in the vertical position and 25 lb static load limit in the horizontal position
- Unique finger grips on the ends of the clip provide easy grip for hand installation, or easy grip of pliers when using pliers to install

Conduit clips

Fig. 1



Cat. no.	Fig. no.	Conduit size	Mounting hole	Qty. per box
SSF-CC3/8	1	14-2 thru 12-3 MC/AC cable and ⅜ in. conduits	9⁄32 in. Plain	100
SSF-CC1/2 3/4	1	½ in.–¾ in.	9⁄32 in. Plain	100
SSF-CC1	1	1 in.	9⁄32 in. Plain	100
SSF-CC1 1/4	1	1¼ in.	9⁄32 in. Plain	100
SSF-CC1 1/2	1	1½ in.	9⁄32 in. Plain	100
SSF-CC2	1	2 in.	9⁄32 in. Plain	100
SSF-CC3/8T	1	14-2 thru 12-3 MC/AC cable and ⅜ in. conduits	¼ in.-20 Thread impression	100
SSF-CC1/2 3/4T	1	½ in. –¾ in.	¼ in.-20 Thread impression	100
SSF-CC1T	1	1 in.	¼ in.-20 Thread impression	100
SSF-CC1 1/4T	1	1¼ in.	¼ in.-20 Thread impression	100
SSF-CC1 1/2T	1	1½ in.	¼ in.-20 Thread impression	100
SSF-CC2T	1	2 in.	¼ in.-20 Thread impression	100



Fig. 2

SSF-CS series

- Available for ½ in. through 1 in. EMT and rigid conduit
- Available with either a plain hole for ¼ in. bolt or a ¼ in.-20 thread impression
- Supports ultimate static load limit of 25 lb in the vertical position and 15 lb in the horizontal position

Conduit clips

Fig. 2



Cat. no.	Fig. no.	Conduit size (in.)	Mounting hole	Qty. per box
SSF-CS1/2	2	½	9⁄32 in. Plain	100
SSF-CS3/4	2	¾	9⁄32 in. Plain	100
SSF-CS1	2	1	9⁄32 in. Plain	100
SSF-CS1/2T	2	½	¼ in.-20 Thread impression	100
SSF-CS3/4T	2	¾	¼ in.-20 Thread impression	100
SSF-CS1T	2	1	¼ in.-20 Thread impression	100

Conduit and cable supports

Conduit supports



Fig. 1

SSF-CC flange-mount series

- Available with spring steel conduit clip bottom mounted or side mounted
- Available for ⅜ in. through 2 in. trade sizes for EMT, rigid, flexible conduit and MC/AC cable
- Fits beam flanges ⅛ in. through ¾ in. thick
- Will pivot through 360°
- Fig. 1 supports 75 lb static load limit
- Fig. 2 supports 25 lb static load limit
- Installs easily with a hammer and pliers

Flange-mount conduit clips

	Fig. 1 Cat. no.	Fig. 2 Cat. no.	Description	Qty. per Box
Fig. 1 	SSF-CC3/8-H1/4	SSF-CC3/8-F1/4	14-2 thru 12-3 MC/AC cable and ⅜ in. conduits to ⅛ in. to ¼ in. flanges and ⅜ in. conduits	25
	SSF-CC1/2 3/4-H1/4	SSF-CC1/2 3/4-F1/4	½ in. conduit to ¾ in. conduit to ⅛ in. to ¼ in. flanges	25
	SSF-CC1-H1/4	SSF-CC1-F1/4	1 in. conduit to ⅛ in. to ¼ in. flanges	25
	SSF-CC1 1/4-H1/4	SSF-CC1 1/4-F1/4	1-14 in. conduit to ⅛ in. to ¼ in. flanges	25
	SSF-CC1 1/2-H1/4	SSF-CC1 1/2-F1/4	1-12 in. conduit to ⅛ in. to ¼ in. flanges	25
	SSF-CC2-H1/4	SSF-CC2-F1/4	2 in. conduit to ⅛ in. to ¼ in. flanges	25
Fig. 2 	SSF-CC3/8-H1/2	SSF-CC3/8-F1/2	14-2 thru 12-3 MC/AC cable and ⅜ in. conduits to 5⁄16 in. to ½ in. flanges	25
	SSF-CC1/2 3/4-H1/2	SSF-CC1/2 3/4-F1/2	½ in. conduit to ¾ in. conduit to 5⁄16 in. to ½ in. flanges	25
	SSF-CC1-H1/2	SSF-CC1-F1/2	1 in. conduit to 5⁄16 in. to ½ in. flanges	25
	SSF-CC1 1/4-H1/2	SSF-CC1 1/4-F1/2	1-14 in. conduit to 5⁄16 in. to ½ in. flanges	25
	SSF-CC1 1/2-H1/2	SSF-CC1 1/2-F1/2	1-12 in. conduit to 5⁄16 in. to ½ in. flanges	25
	SSF-CC2-H1/2	SSF-CC2-F1/2	2 in. conduit to 5⁄16 in. to ½ in. flanges	25
	SSF-CC3/8-H3/4	SSF-CC3/8-F3/4	4-2 thru 12-3 MC/AC cable and ⅜ in. conduits to 9⁄16 in. to ¾ in. flanges	25
	SSF-CC1/2 3/4-H3/4	SSF-CC1/2 3/4-F3/4	½ in. conduit to ¾ in. conduit to 9⁄16 in. to ¾ in. flanges	25
	SSF-CC1-H3/4	SSF-CC1-F3/4	1 in. conduit to 9⁄16 in. to ¾ in. flanges	25
	SSF-CC1 1/4-H3/4	SSF-CC1 1/4-F3/4	1-¼ in. conduit to 9⁄16 in. to ¾ in. flanges	25
	SSF-CC1 1/2-H3/4	SSF-CC1 1/2-F3/4	1-½ in. conduit to 9⁄16 in. to ¾ in. flanges	25
	SSF-CC2-H3/4	SSF-CC2-F3/4	2 in. conduit to 9⁄16 in. to ¾ in. flanges	25

Conduit and cable supports

Conduit supports



Fig. 2

SSF-CS flange-mount series

- Available with spring steel conduit clip bottom mounted or side mounted
- Available for ½ in. through 1 in. EMT and rigid conduit
- Fits beam flanges ⅛ in. through ¾ in. thick.
- Will pivot 360°
- Fig. 1 supports 25 lb static load limit
- Fig. 2 supports 15 lb static load limit
- Requires only a hammer to install

Flange mount snap-in conduit clips

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-CS1/2-H1/4	1	½ in. conduit to ⅛ in. to ¼ in. flanges	25	25
SSF-CS3/4-H1/4	1	¾ in. conduit to ⅛ in. to ¼ in. flanges	25	25
SSF-CS1-H1/4	1	1 in. conduit to ⅛ in. to ¼ in. flanges	25	25
SSF-CS1/2-H1/2	1	½ in. conduit to 5⁄16 in. to ½ in. flanges	25	25
SSF-CS3/4-H1/2	1	¾ in. conduit to 5⁄16 in. to ½ in. flanges	25	25
SSF-CS1-H1/2	1	1 in. conduit to 5⁄16 in. to ½ in. flanges	25	25
SSF-CS1/2-H3/4	1	½ in. conduit to 9⁄16 in. to ¾ in. flanges	25	25
SSF-CS3/4-H3/4	1	¾ in. conduit to 9⁄16 in. to ¾ in. flanges	25	25
SSF-CS1-H3/4	1	1 in. conduit to 9⁄16 in. to ¾ in. flanges	25	25
SSF-CS1/2-F1/4	2	½ in. conduit to ⅛ in. to ¼ in. flanges	15	25
SSF-CS3/4-F1/4	2	¾ in. conduit to ⅛ in. to ¼ in. flanges	15	25
SSF-CS1-F1/4	2	1 in. conduit to ⅛ in. to ¼ in. flanges	15	25
SSF-CS1/2-F1/2	2	½ in. conduit to 5⁄16 in. to ½ in. flanges	15	25
SSF-CS3/4-F1/2	2	¾ in. conduit to 5⁄16 in. to ½ in. flanges	15	25
SSF-CS1-F1/2	2	1 in. conduit to 5⁄16 in. to ½ in. flanges	15	25
SSF-CS1/2-F3/4	2	½ in. conduit to 9⁄16 in. to ¾ in. flanges	15	25
SSF-CS3/4-F3/4	2	¾ in. conduit to 5⁄16 in. to ¾ in. flanges	15	25
SSF-CS1-F3/4	2	1 in. conduit to 5⁄16 in. to ¾ in. flanges	15	25



Fig. 1



Fig. 2

Conduit and cable supports



Fig. 1 and 2

SSF-CUC series

From drop wire or flange

- Attaches to #12 wire through ⅜ in. rod
- Fits ⅛ in. to ⅜ in. flanges
- Provides attachment of conduit and boxes
- Supports #10-24 and ¼ in.-20 threaded bridle rings
- Assemblies to support ½ in., ¾ in. and 1 in. EMT and rigid conduit

Multi-function utility clip from drop wire or flange

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-CUC	1	Multi-function utility clip	50	100
SSF-CUC-S1/2	2	Utility clip to ½ in. conduit	15	25
SSF-CUC-S3/4	2	Utility clip to ¾ in. conduit	15	25
SSF-CUC-S1	2	Utility clip to 1 in. conduit	15	25
SSF-CUC-C1/2 3/4	3	Utility clip to ½ in. or ¾ in. conduit	25	25
SSF-CUC-C1	3	Utility clip to 1 in. conduit	25	25

Fig. 1



Fig. 2



Fig. 3



Fig. 4

SSF-CB series

New finger-friendly design and exclusive center slot keeps drop wire centered.

- Exclusive slot keeps drop wire centered
- Will not bend or deform drop wire
- Delivers faster installation
- Supports MC/AC, 14-2 through 12-3 cable and ½ in. EMT (0.433 in.-0.706 in. O.D.) from #8–#12 wire and ¼ in. plain and threaded rod
- Eliminates the need to trap cable against drop wire
- Supports 25 lb static load limit
- No tools required

Cable from drop wire support

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-CB706	4	Cable from drop wire support	25	100

Fig. 4

Conduit and cable supports



Fig. 1 and 2



Fig. 1 and 2



Fig. 1 and 2

SSF-CK series

- CK series attaches conduit (EMT, rigid, ENT and aluminum) to drop wire, rods or flanges
- Application “A” (vertical flange), supports 25 lb static load limit
- Application “B” (horizontal flange), supports 100 lb static load limit
- Application “C” (vertical drop wire), supports 50 lb static load limit

Conduit hangers from flange, wire or rod

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CK1/2	1	Conduit hanger for flange wire or rod, ½ in.	100
SSF-CK3/4	1	Conduit hanger for flange wire or rod, ¾ in.	100
SSF-CK1	2	Conduit hanger for flange wire or rod, 1 in.	100

Fig. 1

Fig. 2

Conduit size	#10 & #12 Wire	#8 & #9 Wire	3/16 in. Plain rod	1/4 in. Plain & threaded rod	3/8 in. Plain & threaded rod
Wire/rod					
½ EMT	CK1/2	CK1/2	CK1/2	CK1/2	CK3/4
½ Rigid	CK1/2	CK1/2	CK1/2	CK3/4	CK3/4
¾ EMT	CK3/4	CK3/4	CK3/4	CK3/4	CK1
¾ Rigid	CK3/4	CK3/4	CK3/4	CK1	CK1
1 EMT	–	CK1	CK1	CK1	CK1
1 Rigid	–	CK1	CK1	CK1	–

Conduit size	1/8 in. Flange	3/16 in.–1/4 in. Flange	5/16 in.–3/8 in. Flange	7/16 in.–1/2 in. Flange
Flange				
½ EMT	CK1/2	CK1/2	CK3/4	CK3/4
½ Rigid	CK1/2	CK3/4	CK3/4	CK1
¾ EMT	CK3/4	CK3/4	CK1	CK1
¾ Rigid	CK3/4	CK1	CK1	CK1
1 EMT	CK1	CK1	CK1	CK1
1 Rigid	CK1	CK1	–	–


Fig. 3

SSF-CK from drop wire series

- One-piece construction
- Can be used in vertical or horizontal (0.433–0.535 in. outer diameter)
- No load rating; for positioning only
- No installation tools required

Flexible conduit hangers from drop wire

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CK535	3	Flexible conduit hanger from drop wire, #8–#12 wire, 0.433–0.535 in. O.D. cable	100


Fig. 3

Conduit and cable supports


Fig. 1


Fig. 2

SSF-C series

- Supports cable from 1/16 in.–1/2 in. flange
- Works with MC and AC cable dimensions 0.178 to 1.250 in.
- Snaps easily onto flange
- Cable snaps right into fastener
- No load rating; for positioning only
- Installs easily with a hammer

Cable snap clip

Cat. no.	Fig.no.	Cable O.D. (in.)	Flange thickness (in.)	Qty. per box
SSF-CES218	1	0.178–0.218	1/16–3/16	100
SSF-CES281	1	0.218–0.276	1/16–3/16	100
SSF-CES375	1	0.312–0.375	1/16–3/16	100
SSF-CES437	1	0.375–0.437	1/16–3/16	100
SSF-CES562	1	0.468–0.562	1/16–3/16	100
SSF-CES718	1	0.600–0.718	1/16–3/16	100
SSF-CES937	1	0.750–0.937	1/16–3/16	100
SSF-CES1250	1	0.968–1.250	1/16–3/16	100
SSF-CEM218	1	0.178–0.218	3/16–9/32	100
SSF-CEM281	1	0.218–0.276	3/16–9/32	100
SSF-CEM375	1	0.312–0.375	3/16–9/32	100
SSF-CEM437	1	0.375–0.437	3/16–9/32	100
SSF-CEM562	1	0.468–0.562	3/16–9/32	100
SSF-CEM718	1	0.600–0.718	3/16–9/32	100
SSF-CEM937	1	0.750–0.937	3/16–9/32	100
SSF-CEM1250	1	0.968–1.250	3/16–9/32	100
SSF-CEL218	1	0.178–0.218	5/16–1/2	100
SSF-CEL281	1	0.218–0.276	5/16–1/2	100
SSF-CEL375	1	0.312–0.375	5/16–1/2	100
SSF-CEL437	1	0.375–0.437	5/16–1/2	100
SSF-CEL562	1	0.468–0.562	5/16–1/2	100
SSF-CEL718	1	0.600–0.718	5/16–1/2	100
SSF-CEL937	1	0.750–0.937	5/16–1/2	100
SSF-CEL1250	1	0.968–1.250	5/16–1/2	100
SSF-CF1/8	2	0.200–0.468	1/8–1/4	100
SSF-CF3/8	2	0.276–0.600	5/16–7/16	100
SSF-CAXL1	3	Snap clip adapter	1/2–5/8	100
SSF-CAXL2	3	Snap clip adapter	5/8–3/4	100


Fig. 1

Fig. 2


Fig. 3

Conduit and cable supports



Fig. 1

SSF-CM series

- Provides quick attachment for MC or AC cable to metal stud
- No load rating; for positioning only
- No tools required

Flexible conduit to metal stud

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CM535	1	MC/AC cable to metal stud clip, 14-2 thru 12-3 cable (0.433 in. -0.535 in. O.D.)	100



Fig. 1



Fig. 2

SSF-CW series

- Effectively supports 3 runs (CW3) or 6 runs (CW6) of MC/AC cable
- Also can be used to support all types of low voltage cabling as a bridle ring would
- Locking hook contains cables inside the loop

Flexible conduit and cable hanger

Cat. no.	Fig. no.	No. of runs of MC/AC cable	Inner diameter (in.)	Ultimate static load limit (lb)	Qty. per box
SSF-CW3	2	3	1⅛	20	100
SSF-CW6	2	6	1¾	50	100

Fig. 2

Conduit and cable supports



Fig. 1 and 2



Fig. 1

SSF-CC1 series

- Back-to-back conduit clips for individual use or use as lightweight trapeze
- Available for ⅜ in. through 2 in. sizes for EMT, rigid, flexible conduit and MC/AC cable
- For use as lightweight trapeze, total load limit is 100 lb
- Clips for vertical use, static load limit 100 lb
- No screws or bolts

Lightweight trapeze

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CC1-C3/8	1	Back-to-back conduit clips, 14-2 thru 12-3 MC/AC to 1 in. conduit	25
SSF-CC1-C1/2 3/4	1	Back-to-back conduit clips, ½ in. or ¾ in. conduit to 1 in. conduit	25
SSF-CC1-C1	1	Back-to-back conduit clips, 1 in. conduit to 1 in. conduit	25
SSF-CC1-C1 1/4	1	Back-to-back conduit clips, 1¼ in. conduit to 1 in. conduit	25
SSF-CC1-C1 1/2	1	Back-to-back conduit clips, 1½ in. conduit to 1 in. conduit	25
SSF-CC1-C2	1	Back-to-back conduit clips, 2 in. conduit to 1 in. conduit	25
SSF-CC1/2 3/4-C1/2 3/4*	1	Back-to-back conduit clips, ½ in. or ¾ in. conduit	25

Fig. 1

Conduit to conduit clips

Cat. no.	Fig. no.	Description	Static load limit	Qty. per box
SSF-CS1/2-S1/2*	2	Back-to-back snap-in conduit clip, ½ in. to ½ in. EMT or rigid	25	25
SSF-CS1/2-S3/4*	2	Back-to-back snap-in conduit clip, ½ in. to ¾ in. EMT or rigid	25	25
SSF-CS1/2-S1*	2	Back-to-back snap-in conduit clip, ½ in. to 1 in. EMT or rigid	25	25
SSF-CS3/4-S3/4*	2	Back-to-back snap-in conduit clip, ¾ in. to ¾ in. EMT or rigid	25	25
SSF-CS3/4-S1*	2	Back-to-back snap-in conduit clip, ¾ in. to 1 in. EMT or rigid	25	25
SSF-CS1-S1*	2	Back-to-back snap-in conduit clip, 1 in. to 1 in. EMT or rigid	25	25

Fig. 2

* UL and cUL not applicable

Conduit and cable supports


Fig. 2


Fig. 1

SSF-CR series

- Clips available for 1, 2 or 4 cable runs
- The standard CR2 part can be broken apart to create 2 single cable run clips
- Mounting holes available for mounting flat or perpendicular to stud or flange
- Mounting clips for quick attachment to metal studs
- Sturdy design provides firm support of attached cable

MC/AC Cable–flexible conduit

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CR2	1	Metal or wood stud and ⅛ in. flange	100
SSF-CR1	2	Supports 2 runs of MC/AC cable	100
SSF-CR4	3	Supports up to 4 runs of MC/AC cable	25
SSF-CR2-BCH	4	5⁄16 in. thru ½ in. flange	25
SSF-CR2-BCV	5	5⁄16 in. thru ½ in. flange	25
SSF-CR2-F1/2	6	⅛ in. thru ¼ in. flange	25
SSF-CR2-F1/4	6	⅛ in. thru ¼ in. flange	25
SSF-CR2-H1/2	7	1⁄16 in. thru ¼ in. C purlin or vertical flange	25
SSF-CR2-H1/4	7	1⁄16 in. thru ¼ in. C purlin or vertical flange	25
SSF-CR2-V1/4	8	1⁄16 in. thru ¼ in. C purlin or vertical flange	25
SSF-CR2-Z2	9	Z purlin	25
SSF-CR2-UC	10	Through metal stud	25
SSF-CR1-CV	11	Acoustical tee	25
SSF-CR2-AB	12	Through metal stud	25
SSF-CR1-UC	13	Through metal stud	25
SSF-CR1-F1/2	14	5⁄16 in. through ½ in. flange	25
SSF-CR1-F1/4	14	⅛ in. through ¼ in. flange	25
SSF-CR1-BCH	15	Through ½ in. flange	25


Fig. 1


Fig. 2

Fig. 3


Fig. 4


Fig. 5


Fig. 6


Fig. 7

Fig. 8

Fig. 9


Fig. 10

Fig. 11

Fig. 12

Fig. 13

Fig. 14

Fig. 15

Conduit and cable supports

Conduit supports



Fig. 1–4

SSF-CX series

- Supports conduit on both sides of a junction box
- Holes in opposite ends of 18 in. bar accommodate CC and CS series conduit clips
- A center hole accepts BH flange clips and CVC utility clips fasteners for attachment to threaded rod

Support box and conduits from single drop wires, rods and flanges

Cat. No.	Fig. no.	Description	Qty. per box
SSF-CX18-C3/8H1/4	1	Support bar for conduit/box, MC/AC cable to ⅜ in. flex to ⅛ in. to ¼ in. flange	25
SSF-CX18-C3/8H1/2	1	Support bar for conduit/box, MC/AC cable to ⅜ in. flex to 9/16 in. to ½ in. flange	25
SSF-CX18-C1/2 3/4-H1/4	1	Support bar for conduit/box, ½ in. & ¾ in. conduit to ⅛ in. to ¼ in. flange	25
SSF-CX18-C1/2 3/4-H1/2	1	Support bar for conduit/box, ½ in. & ¾ in. conduit to 9/16 in. to ½ in. flange	25
SSF-CX18-C1-H1/4	1	Support bar for conduit/box, 1 in. conduit to ⅛ in. to ¼ in. flange	25
SSF-CX18-C1-H1/2	1	Support bar for conduit/box 1 in. conduit to 9/16 in. to ½ in. flange	25
SSF-CX18-C3/8S	2	Support bar for conduit/box, MC/AC cable to ⅜ in. flex, ¼ in. -20 x 9/16 in. stud in center hole	25
SSF-CX18-C1/2 3/4S	2	Support bar for conduit/box, ½ in. to ¾ in. conduit, ¼ in. -20 x 9/16 in. stud in center hole	25
SSF-CX18-C1S	2	Support bar for conduit/box, 1 in. conduit to ⅜ in. flex, ¼ in. -20 x 9/16 in. stud in center hole	25
SSF-CX18-C3/8	3	Support bar for conduit/box, MC/AC cable to ⅜ in. flex for screw or threaded rod mount	25
SSF-CX18-C1/2 3/4	3	Support bar for conduit/box, ½ in. to ¾ in. conduit for screw or threaded rod mount	25
SSF-CX18-C1	3	Support bar for conduit/box, 1 in. conduit for screw or threaded rod mount	25
SSF-CX18-C3/8UC	4	Support bar for conduit/box, MC/AC cable to ⅜ in. flex from #12 wire thru ⅜ in. rod	25
SSF-CX18-C1/2 3/4UC	4	Support bar for conduit/box, ½ in. & ¾ in. conduit from #12 wire thru ⅜ in. rod	25
SSF-CX18-C1UC	4	Support bar for conduit/box, 1 in. conduit from #12 wire thru ⅜ in. rod	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4

Conduit and cable supports

Conduit supports



Fig. 2

SSF-CC and SSF-CS series

- Attach conduit to steel, concrete or wood
- FB series can be used to avoid offset bends when used with 1½ in. deep boxes
- OB series can be used to avoid offset bends when used with 2⅛ in. deep boxes

Nailing bracket

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CC1/2 3/4-FB	1	Nailing bracket riveted to conduit clip, ½ in. and ¾ in. conduit	25
SSF-CS1/2-FB*	2	Nailing bracket riveted to snap-in conduit clip, ½ in. EMT and rigid	25
SSF-CS3/4-FB*	2	Nailing bracket riveted to snap-in conduit clip, ¾ in. EMT and rigid	25
SSF-CS1/2-OB*	3	Offset nailing bracket - ½ in. conduit	25
SSF-CS3/4-OB*	3	Offset nailing bracket - ¾ in. conduit	25
SSF-CS1-OB*	3	Offset nailing bracket - 1 in. conduit	25



Fig. 1



Fig. 2



Fig. 3

* UL and cUL not applicable

Conduit and cable supports

Cable fasteners



Fig. 1

SSF-CT and L11 series

- Secures MC/AC cable bundles and telecom cable bundles
- 11 in. cable tie included

Cable fastener with cable tie

Cat. no.	Fig. no.	Description	Qty. per box
SSF-CT-F1/2	1	5⁄16 in. to ½ in. Flange	25
SSF-CT-F1/4	1	⅛ in. to ¼ in. Flange	25
SSF-CT-V1/4	2	Through ¼ in. flange	25
SSF-CT-UC	3	Utility clip	25
SSF-CT-A1/4	4	⅛ in. to ¼ in. Vertical flange	25
SSF-CT-AB	5	Angle bracket	25
SSF-CT-BC	6	Through ½ in. flange	25
SSF-CT-CH	7	Acoustical tee	25
L11-120-9-C	8	11 in. Cable tie	100

Fig. 1

Fig. 2



Fig. 3



Fig. 4

Fig. 5

Fig. 6

Fig. 8

Fig. 7

Stud wall and drywall supports



Fig. 1

Metal stud

- Supports ½ in. and ¾ in. EMT conduit and MC/AC cable
- Works with wood or metal stud
- Preset bend provides alignment with knockouts for 1½ in. or 2⅛ in. deep boxes

Screw-on conduit support

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SS1/2 3/4	1	½ in. and ¾ in. EMT conduit and MC/AC to metal or wood stud for 1½ in. deep box	100
SSF-SS1/2 3/4D	1	½ in. and ¾ in. EMT conduit, and MC/AC to metal or wood stud for 2⅛ in. deep box	100



Fig. 1



Fig. 3 and 4

Snap-on box supports

- Fits most electrical boxes requiring plaster rings
- Fits most metal stud sizes
- Will not move on stud
- Wider part for more secure fastening
- No screws required
- Support leg braces box against stud
- Installs easily with a hammer

Snap-on box clip

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SMX	2	Snap-on box support for mounting to stud	100
SSF-SK	3	Screw to stud, box support	100
SSF-SK-C1/2 3/4	4	½ in. -¾ in. finger close conduit clip	25
SSF-SK-C1	4	1 in. finger close conduit clip	25
SSF-SK-S1/2	5	½ in. snap-in conduit clip	25
SSF-SK-S3/4	5	¾ in. snap-in conduit clip	25
SSF-SK-S1	5	1 in. snap-in conduit clip	25



Fig. 2



Fig. 3



Fig. 4



Fig. 5

Stud wall and drywall supports


Fig. 1


Fig. 2


Fig. 3

Far side box supports

- Provides side support for electrical boxes
- Works with most electrical boxes for 2½ in., 3½ in. and 4 in. metal stud depths

Far side box support

Cat. No.	Fig. no.	Description	Qty. per box
SS1-TB	1	Far side box support	100
50-SC*	2	Box brace for 4 in. square or octagonal box	100
SSF-SX	3	Electrical box support	100


Fig. 1


Fig. 2


Fig. 3

* CSA and UL not applicable

Stud wall and drywall supports

Metal stud



Fig. 1–5

SSF-SF series

- Attaches securely to most metal stud sizes
- Adjustable offset allows the box to protrude through drywall sizes ¼ in., ⅜ in., ½ in., ⅝ in., or ¾ in.
- Riveted to accommodate your drywall requirements

Switch box or conduit to metal stud

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SFA	1	Snap-on box support for mounting to stud,adjustable	25
SSF-SFO	2	Snap-on box support for mounting to stud, riveted for flush to stud face	25
SSF-SF1/4	2	Snap-on box support for mounting to stud, riveted for ¼ in. drywall	25
SSF-SF3/8	2	Snap-on box support for mounting to stud, riveted for ⅜ in. drywall	25
SSF-SF1/2	2	Snap-on box support for mounting to stud, riveted for ½ in. drywall	25
SSF-SF5/8	2	Snap-on box support for mounting to stud, riveted for ⅝ in. drywall	25
SSF-SF3/4	2	Snap-on box support for mounting to stud, riveted for ¾ in. drywall	25
SSF-SFT*	3	Snap-on box support for mounting to stud with ¼ in.-20 thread impression	25
SSF-SF-S1/2	4	Snap-on stud, push-in conduit clip, ½ in. conduit	25
SSF-SF-S3/4	4	Snap-on stud, push-in conduit clip, ¾ in. conduit	25
SSF-SF-S1	4	Snap-on stud, push-in conduit clip, 1 in. conduit	25
SSF-SF-C3/8	5	Snap-on stud, conduit support clip, ⅜ in. conduit or MC/AC cable	25
SSF-SF-C1/2 3/4	5	Snap-on stud, conduit support clip, ½ in.–¾ in. conduit	25
SSF-SF-C1	5	Snap-on stud, conduit support clip, 1 in. conduit	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

* CSA not applicable

Stud wall and drywall supports

Metal stud



Fig. 1

SSF-SH series

- Attaches 4 in. and 4$^{11}/_{16}$ in. electrical boxes to metal stud
- Support leg can be attached to stud to eliminate movement of box in wall
- Attaches to metal or wood stud using self-tapping screws and screw gun or nails
- One part mounts boxes for 1½ in., 2½ in., 3½ in., 4 in. and 6 in. stud, which means less inventory
- SH4, SH6 brackets available specifically for 4 in. and 6 in. studs respectively

Mounting bracket

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SH2346	1	4 in. & 4$^{11}/_{16}$ in. outlet boxes to 2½ in., 3½ in. , 4 in. & 6 in. metal studs	100
SSF-SH4	2	4 in. & 4$^{11}/_{16}$ in. outlet boxes to 4 in. metal studs	50
SSF-SH6	2	4 in. & 4$^{11}/_{16}$ in. outlet boxes to 6 in. metal studs	50



Fig. 1



Fig. 2



Fig. 3

SSF-SG series

- Self-tapping screws are aligned with the dimples so that the box is straight
- Allows mounting of multiple boxes
- Preset for metal stud 16 in. or 24 in. on center
- Depth set for 1½ in. or 2⅛ in. deep electrical box
- Installs easily with a screw gun
- Adjustable tabs for 1½ in. or 2⅛ in. deep boxes
- Adjustable for non-standard stud spacing

Screw gun box bracket

Cat. no.	Fig. no.	Description	Stud spacing	Box depth	Qty. per box
SSF-SG16A	3	Adjustable box bracket	11 in.–18 in.	1½ in. or 2⅛ in.	50
SSF-SG24A	3	Adjustable box bracket	17 in.–26 in.	1½ in. or 2⅛ in.	50



Fig. 3

Stud wall and drywall supports

Box brackets



Fig. 1

SSF-SB series

- Supports electrical boxes, plaster rings or low voltage devices from one bracket
- Accommodates 4 in. or 4 11/16 in. boxes
- Bendable leg serves as a bracket stabilizer
- SB16F and SB24F flat versions allow mounting for any stud spacing, from 4 in. to 24 in.
- SB brackets allow box mounting in all four 90° orientations

Box mounting brackets for between studs

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SB16	1	Box mounting bracket for between studs, 16 in. stud spacing	25
SSF-SB24	2	Box mounting bracket for between studs, 24 in. stud spacing	25
SSF-SB16F	3	Box mounting bracket, flat version, up to 16 in. stud spacing	25
SSF-SB24F	4	Box mounting bracket, flat version, up to 24 in. stud spacing	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

SSF-S series

- Improved bracket with bendable stabilizer leg for use on 2½ in. and 3½ in. metal studs
- Mounts outlet boxes 12 in. or 18 in. offset from either a metal stud track or a stud
- When mounted, drywall ring is brought to within 1/8 in. of drywall every time and will not bulge or break out drywall
- Mounts 4 in. or 4 11/16 in. outlet boxes, 1½ in. or 2⅛ in. deep
- The SSF-S6X extender works with SSF-SV12, SSF-SV18, SSF-SB16 and SSF-SB24 to extend stabilizer leg when using 6 in. stud

Extension plate bracket

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SV12	5	Extension plate bracket, 12 in. height	50
SSF-SV18	5	Extension plate bracket, 18 in. height	50
SSF-S6X	6	Extender for 6 in. metal studs	100



Fig. 5



Fig.6

Stud wall and drywall supports



Fig. 1

SSF-SHSB series

- Fits 2 in. x 3 in. switch boxes with one or two screw plaster ears
- Uses one bracket on 2½ in. and 3½ in. metal studs
- Bracket can be piggy-backed on same side of metal stud (singly or any number in series), giving greater flexibility to installer
- Brackets can be mounted on both sides of metal stud for double mounting
- Will not bulge or break out the drywall when mounted

Switch box bracket

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SHSB	1	Switch box bracket	100



Fig. 1



Fig. 2

Floor-mounted box supports

- Mounts on metal or wood studding
- Used as conduit rack or space for rigid conduit, IMC or EMT
- Ideal for schools, hospitals, industrial and commercial jobs
- Galvanized steel

Floor-mounted box supports

Cat. No.	Fig. no.	Description	Qty. per box
7502	2	Footed box supports, 20 in. height	25
7503 SC	2	Footed box supports, 30 in. height	50



Fig. 2

Stud wall and drywall supports

Metal studs and drywall



Fig. 1

Metal stud

- Fits any size or shape metal stud hole
- Provides complete 360° protection for cable

Easy snap grommet

Cat. no.	Fig. no.	Description	Qty. per box
1300*	1	Plastic bushing for metal stud 1 in. trade size opening (1 11/32 in.)	100
1216-EN*	2	Twist-on universal bushing for metal stud	50
CI158SSPB	3	For 1 5/8 in. metal stud, installed inside the steel stud replacing 2 CI66-SS	250



Fig. 1



Fig. 2



Fig. 3

* CSA not applicable



Fig. 6

Drywall

- A quick means of support for horizontal runs of conduits or MC/AC through metal stud
- Installs easily with a screw gun
- SSF-SPI allows ENT conduit and MC/AC cable to be easily pulled through metal stud

Through stud cable/conduit support

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SAB-C1/2 3/4	4	1/2 in. or 3/4 in. finger close conduit clip	25
SSF-SAB-C3/8**	4	Finger close conduit clip 14-2 thru 12-3 MC/AC cable and 3/8 in. conduits	25
SSF-SAB-S1/2*	5	Snap-in conduit clip – 1/2 in. conduit	25
SSF-SAB-S3/4*	5	Snap-in conduit clip – 3/4 in. conduit	25
SSF-SP1*	6	Supports up to 1 in. conduit	100



Fig. 4



Fig. 5



Fig. 6

* UL and CSA not applicable
** CSA not applicable

Stud wall and drywall supports

Drywall



Fig. 1

Low voltage mounting brackets – screw-on support

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work

Low voltage mounting brackets – screw-on support

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SLV*	1	Old work or new work low voltage bracket	100
VN1*	2	Nonmetallic single-gang new work low voltage bracket	50
VN2*	–	Nonmetallic two-gang new work low voltage bracket	50
VW1*	3	Nonmetallic single-gang old work low voltage bracket	50
VW2*	–	Nonmetallic two-gang old work low voltage bracket	50
WBF-1*	4	Low voltage mounting bracket with screws	100
CIMB-1	5	Mounting bracket, raised ½ in.	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

* CSA not applicable



Fig. 6 and 7

Old work box support

- Quickly attaches box through finished drywall
- For up to 1½ in. thick drywall
- Shipped in one-piece break-apart design
- Easy to install

Old work box support

Cat. No.	Fig. no.	Description	Qty. per box
CI820D	6 and 7	Re-work switch box steel mounting holder for ½ in. dry-wall	200 sets



Fig. 6



Fig. 7

Stud wall and drywall supports

Drywall and protector plates



Fig. 1

Drywall

- Use for oversized drywall openings
- Prevents broken cover plates
- Stops device from being pushed back in wall
- Makes floating device rigid

Device leveler and retainer

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SR	1	Single-gang device leveler and retainer	100



Fig. 1



Fig. 2 and 3

Protector plates

- Protects cable(s) from damage when installing drywall or paneling
- No nails or screws required
- Fits all stud sizes
- Both products meet requirements for CEC Rule 12-516 and 12-616
- CI66SS legs are crimped with pliers to stud to provide secure fit

Protector plates

Cat. no.	Fig. no.	Description	Qty. per box
CI66SS	2	Protector plate for metal stud	250
CI66	3	Protector plate for wood stud	250



Fig. 2

Fig. 3

Acoustical tee supports

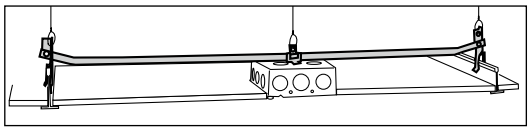

Fig. 1, 3 and 4

Snap-on box hanger

- Allows positioning of fixture or box anywhere across a 24 in. span
- Hanger comes complete with THC box mounting clip and ¼ in.-20 screw
- Drop wire holes in tee clips allow the clips to be supported from the main structure
- Part includes dual height feature, which allows 1½ in. deep electrical box to be mounted flush with tile or offset ¾ in. for plaster ring
- The series includes bar hanger, THC clip

Snap-on box hanger

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TH12	1	T-grid box hanger, 12 in. span	25
SSF-TH20	1	T-grid box hanger, 20 in. span	25
SSF-TH24	1	T-grid box hanger, 24 in. span	25
SSF-TH30	1	T-grid box hanger, 30 in. span	25
SSF-TH24A	2	8 in. height adjustable, 24 in. span	25
SSF-THC	3	Snap-on fixture/box hanger mounting clip	100
SSF-MH1/4-3/8C	4	¼ in.-20 x ⅜ in. bolt combo head	100



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

Suspension bars

- Reduces installation time
- Hanger comes complete with bar riveted to acoustical tee clip, additional acoustical tee clip and ¼ in.-20 screw
- Position of fixture adjustable with span
- Solid bar for sturdier installation
- Installs easily with a screwdriver

Suspension bars for Lightolier® and Calculite® series fixtures*

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TL24	5	Suspension bars for Lightolier Calculite	10



Fig. 5

*Note: Lightolier and Calculite are registered trademarks of Lightolier, and GENLYTE Company.

Acoustical tee supports



Fig. 1

Light fixture support clips

- Enlarged tab allows for easy positioning of the clip over the tee bar
- Gives a positive method of supporting troffers and lay-ins
- Fits round or rectangular head tee bar
- No installation tools required

Light fixture support clips

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TFC	1	Light fixture support clip	100



Fig. 1

Acoustical tee supports



Fig. 1

Electrical component supports

- Provide support for conduit and outlet boxes above acoustical tee bar
- TCH and TCV series provide both horizontal and vertical support
- Available with ¼ in.-20 thread impression or plain hole
- No installation tools required

Electrical component supports

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TCH	1	Top mount T-bar fastener with plain hole	100
SSF-TCHT	1	Top mount T-bar fastener with ¼ in.-20 thread impression	100
SSF-TCH-S1/2	2	Acoustical clip with top-mounted snap-in conduit clip for ½ in. conduit	25
SSF-TCH-S3/4	2	Acoustical clip with top-mounted snap-in conduit clip for ¾ in. conduit	25
SSF-TCH-S1	2	Acoustical clip with top-mounted snap-in conduit clip for 1 in. conduit	25
SSF-TCH-C1/2 3/4	3	Acoustical clip with top-mounted conduit clip for ½ in.–¾ in. conduit	25
SSF-TCV	4	Side-mount T-bar fastener with plain hole	100
SSF-TCVT	4	Side-mount T-bar fastener with ¼ in.-20 thread impression	25
SSF-TCV-S1/2	5	Acoustical clip with side-mounted conduit clip for ½ in. conduit	25
SSF-TCV-S3/4	5	Acoustical clip with side-mounted conduit clip for ¾ in. conduit	25
SSF-TCV-S1	5	Acoustical clip with side-mounted conduit clip for 1 in. conduit	25
SSF-TCV-C1/2 3/4	6	Acoustical clip with side-mounted conduit clip for ½ in.–¾ in. conduit	25



Fig. 1



Fig. 2

Fig. 3



Fig. 4



Fig. 5



Fig. 6

Acoustical tee supports



Fig. 2

Adjustable box and conduit bracket

- Supports boxes and conduit above acoustical tee with height adjustments from 4¼ in. through 7¼ in.
- Attaches to conduit clips with thread impressions at required height
- Assemblies available for pre-set conduit locations
- TA7-S assemblies are furnished with the TA7 bracket, the conduit clip with thread impressions and ¼ in.-20 cap screw

Adjustable box and conduit bracket

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TA7	1	Adjustable box and conduit support for T-grid	50
SSF-TA7-S1/2	2	For T-grid, with ½ in. snap-in conduit clip	25
SSF-TA7-S3/4	2	For T-grid, with ¾ in. snap-in conduit clip	25
SSF-TA7-S1	2	For T-grid, with 1 in. snap-in conduit clip	25



Fig. 1 Fig. 2 Fig. 3*

*Note - For preset location, add location number per Figure 3.

Acoustical tee supports

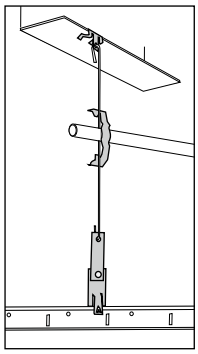

Fig. 1

Drop wire stablizer

- Provides attachment for dedicated electrical drop wire
- Yellow painted finish for easy identification
- Complies with CEC article 12-918

Drop wire stablizer

Cat. no.	Fig. no.	Description	Qty. per box
SSF-TCVYL	1	Drop wire stabilizer, #12 through #8 drop wire	25
SSF-TCVYL-FBUC	2	Drop wire stabilizer, #8 drop wire through ⅜ in. rod	25

Fig. 1

Fig. 2

Acoustical tee supports



Fig. 1

Acoustical tee "twist-on" for fixture support

- Supports electrical fixtures from acoustical tee bar 9/16 in. or 15/16 in. wide
- 1/4 in.-20 stud – 5/8 in., 1 1/2 in., 2 in. or 3 in. long
- All T-clips with 1/4 in.-20 studs are furnished with a TWN-1/4 in. wing nut
- All T-clips with #8-32 studs are furnished with a #8-32 Palnut® fastener
- No installation tools required

Acoustical tee "twist-on" for fixture support

Cat. no.	Fig. no.	Description	Static load limit	Qty. per box
SSF-T15T5/8	1	1/4 in.-20 x 5/8 in. stud, 15/16 in. tee	50	25
SSF-T15T5/8WH	1	1/4 in.-20 x 5/8 in. stud, 15/16 in. tee, white finish	20	25
SSF-T15T1 1/2	1	1/4 in. -20 x 1 1/2 in. stud, 15/16 in. tee	50	25
SSF-T15T1 1/2WH	1	1/4 in.-20 x 1 1/2 in. stud, 15/16 in. tee, white finish	20	25
SSF-T15T2	1	1/4 in.-20 x 2 in. stud, 15/16 in. tee	50	25
SSF-T15T3	1	1/4 in.-20 x 3 in. stud, 15/16 in. tee	50	25
SSF-T15T8-5/8	1	#8-32 x 5/8 in. stud, 15/16 in. tee	50	25
SSF-T15T8-5/8WH	1	#8-32 x 3 in. stud, 15/16 in. tee, white finish	20	25
SSF-T15T8-7/16	1	#8-32 x 7/16 in. stud, 15/16 in. tee	50	25
SSF-T15T8-7/16WH	1	#8-32 x 7/16 in. stud, 15/16 in. tee, white finish	20	25
SSF-T15TSH	2	Acoustical tile sign hanger attachment, white finish	20	25



Fig. 1



Fig. 2

Palnut is a registered trademark of A. Raymond et Cie.

Acoustical tee supports

Hangers



Fig. 1

Light fixture hanger

- Supports fluorescent light fixtures from S-hooks and jack chain
- Supports 50 lb ultimate static load limit
- No need to modify jack chain for fixture installation

Light fixture hanger

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-TV	1	Fluorescent light fixture hanger	50	100
CI-8930	2	Fluorescent light fixture hanger	115	100
CI-8932	3	Fluorescent light fixture hanger	115	100
C8960	4	Tie wire #16	125	300 ft.



Fig. 1



Fig. 2



Fig. 3

Fig. 4

Acoustical tee supports

Hangers



Fig. 5 and 6

S-hook and jack chain

- Order S-hook and jack chain with your Steel City spring steel fasteners to save on freight, energy and purchase orders

S-hook and jack chain

Cat. no.	Fig. no.	Trade size	Description	Static load limit (lb)	Qty. per box/per foot
CI-8905	5	–	S-Hook	90	100
CI-8910	6	#10-T	Jack chain	43	300
8910-SP2	6	#10-T	Jack chain	43	200
8910-SP4	6	#10-T	Jack chain	43	500
CI-8912	6	#12	Jack chain	29	300
CI-8903	7	#2	Lion chain	115	100
CI-8904	7	#3	Lion chain	90	250
8904-SP2	7	#3	Lion chain	90	250
8904-SP5	7	#3	Lion chain	90	500

Fig. 5

Fig. 6

Fig. 7

Low voltage/telecommunication supports

Cable supports



Fig. 1–6

Cable support hooks

- Extra-wide base provides cable support on a flat surface, eliminating kinking, bending and crimping
- Accommodates category 6, fiber optic cable and innerduct
- Available in 1⁵⁄₁₆ in. and 2 in. diameter size cable support hook
- Complies with UL, CSA, NEC and EIA/TIA requirements for structured cabling systems
- Supports 100 lb per hook static load limit
- VJ series cable support hook can be snapped together with VB-10 hanger bracket without hardware or tools

Cable support hooks

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-VJ1 5/16C	1	Wide base cable support hook, 1⁵⁄₁₆ in. diameter	100	50
SSF-VJ2C	1	Wide base cable support hook, 2 in. diameter	100	50
SSF-VJ1 5/16	2	Wide base cable support hook, 1⁵⁄₁₆ in. diameter	100	50
SSF-VJ2	2	Wide base cable support hook, 2 in. diameter	100	50
SSF-VB10	3	Hanger bar	100	100
SSF-VJ1 5/16-BC	4	Cable support J-hook, 1⁵⁄₁₆ in. dia. clamp to flanges up to ½ in. thick	100	25
SSF-VJ2-BC	4	Cable support J-hook, 2 in. dia. clamp to flanges up to ½ in. thick	100	25
SSF-VJ1 5/16-BC-AB	5	Cable support J-hook, 1⁵⁄₁₆ in. dia. clamp to flanges up to ½ in. thick	100	25
SSF-VJ2-BC-AB	5	Cable support J-hook, 2 in. dia. clamp to flanges up to ½ in. thick	100	25
SSF-VJ1 5/16-F1/4	6	Cable support hook, 1⁵⁄₁₆ in. dia. clip to ⅛ in. to ¼ in. flange	100	25
SSF-VJ1 5/16-F1/2	6	Cable support hook, 1⁵⁄₁₆ in. dia. clip to ⅝ in. to ½ in. flange	100	25
SSF-VJ1 5/16-F3/4	6	Cable support hook, 1⁵⁄₁₆ in. dia. clip to ⁹⁄₁₆ in. to ¾ in. flange	100	25
SSF-VJ2-F1/4	6	Cable support hook, 2 in. dia. clip to ⅛ in. to ¼ in. flange	100	25
SSF-VJ2-F1/2	6	Cable support hook, 2 in. dia. clip to ⅝ in. to ½ in. flange	100	25
SSF-VJ2-F3/4	6	Cable support hook, 2 in. dia. clip to ⁹⁄₁₆ in. to ¾ in. flange	100	25
SSF-VJ1 5/16-CH1LN	7	Cable support J-hook to raise floor support posts	100	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7

Low voltage/telecommunication supports

Cable supports



Fig. 1–6

Cable support hooks

- Extra-wide base provides cable support on a flat surface, eliminating kinking, bending and crimping
- Accommodates category 6, fiber optic cable and innerduct
- Available in 1 5/16 in. and 2 in. diameter size cable support clips
- Complies with UL, CSA, NEC and EIA/TIA requirements for structured cabling systems
- Supports 100 lb per hook static load limit
- VJ Series cable support clips can be snapped together with VB-10 hanger bracket without hardware or tools

Cable support hooks

Cat. no.	Fig. no.	Description	Qty. per box
SSF-VJ1 5/16-UC	1	Cable support hook, 1 5/16 in. diameter clip to #12 drop wire thru 3/8 in. rod	25
SSF-VJ2-UC	1	Cable support hook, 2 in. diameter clip to #12 drop wire thru 3/8 in. rod	25
SSF-VJ1 5/16-AB	2	Cable support hook, 1 5/16 in. diameter clip rotates 360°	25
SSF-VJ2-AB	2	Cable support hook, 2 in. diameter clip rotates 360°	25
SSF-VJ1 5/16-A7	3	Cable support hook, 1 5/16 in. diameter clip to acoustical tee	25
SSF-VJ2-A7	3	Cable support hook, 3 in. diameter clip to acoustical tee	25



Fig. 1



Fig. 2



Fig. 3

Cable support hooks

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-VJ1 5/16-H1/4-AB	4	Cable support hook, 1 5/16 in. diameter clip to 1/8 in. to 1/4 in. flange, rotates 360°	100	25
SSF-VJ1 5/16-H1/2-AB	4	Cable support hook, 1 5/16 in. diameter clip to 5/16 in. to 1/2 in. flange, rotates 360°	100	25
SSF-VJ1 5/16-H13/4-AB	4	Cable support hook, 1 5/16 in. diameter clip to 9/16 in. to 3/4 in. flange, rotates 360°	100	25
SSF-VJ2-H1/4-AB	4	Cable support hook, 2 in. diameter clip to 1/8 in. to 1/4 in. flange, rotates 360°	100	25
SSF-VJ2-H1/2-AB	4	Cable support hook, 2 in. diameter clip to 5/16 in. to 1/2 in. flange, rotates 360°	100	25
SSF-VJ2-H13/4-AB	4	Cable support hook, 2 in. diameter clip to 9/16 in. to 3/4 in. flange, rotates 360°	100	25
SSF-VJ1 5/16-V1/4	5	Cable support hook, 1 5/16 in. diameter clip to 3/32 in. to 9/32 in. vertical flange	100	25
SSF-VJ2-V1/4	5	Cable support hook, 2 in. diameter clip to 3/32 in. to 9/32 in. vertical flange	100	25
SSF-VJ1 5/16-A1/4	6	Cable support hook, 1 5/16 in. diameter clip to 1/16 in. to 1/4 in. Z purlin	100	25
SSF-VJ2-A1/4	6	Cable support hook, 2 in. diameter clip to 1/16 in. to 1/4 in. Z purlin	100	25



Fig. 4



Fig. 5



Fig. 6

Low voltage/telecommunication supports

Cable supports



Fig. 1

Deltec tie cable support fasteners

- Wide strap ideal for attachment of high performance cables such as fiber optic and CAT 5
- Pre-assembled part combinations allow quick installation to vertical and horizontal flanges, purlin, drop wire, threaded rod and acoustical tee bar
- Can be used for single or multiple bundles
- Fully adjustable around bundle, fully encompasses cabling
- Wide, firm bearing surface to support wire

Deltec tie cable support fasteners

Cat. no.	Fig. no.	Description	Qty. per box
SSF-VT13-F1/4	1	13 in. Strap with ¼ in. flange clip attachment	25
SSF-VT13-F1/2	1	13 in. Strap with ½ in. flange clip attachment	25
SSF-VT13-BC	2	13 in. Strap with beam clamp attachment	25
SSF-VT13-UC	3	13 in. Strap with utility clip attachment	25
SSF-VT13-AB	4	13 in. Strap with angle bracket attachment	25
SSF-VT13-V1/4	5	13 in. Strap with vertical flange clip attachment	25
SSF-VT13-A1/4	6	13 in. Strap with Z purlin clip attachment	25
SSF-VT13-A7	7	13 in. Strap with TA7 acoustical tee bar mounting attachment	25
SSF-VT27-F1/4	1	27 in. Strap with ¼ in. flange clip attachment	25
SSF-VT27-F1/2	1	27 in. Strap with ½ in. flange clip attachment	25
SSF-VT27-BC	2	27 in. Strap with beam clamp attachment	25
SSF-VT27-UC	3	27 in. Strap with utility clip attachment	25
SSF-VT27-AB	4	27 in. Strap with angle bracket attachment	25
SSF-VT27-V1/4	5	27 in. Strap with vertical flange clip attachment	25
SSF-VT27-A1/4	6	27 in. Strap with Z purlin clip attachment	25
SSF-VT27-A7	7	27 in. Strap with TA7 acoustical tee bar mounting attachment	25
CSS-H	–	Strap mounting bracket	25
CSS-135	–	Additional 13½ in. strap ties	25
CSS-270	–	Additional 27 in. strap ties	25

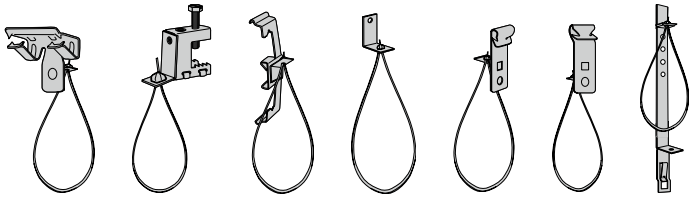

Fig. 1 Fig. 2 Fig. 3 Fig. 4 Fig. 5 Fig. 6 Fig. 7

Low voltage/telecommunication supports

Cable supports

Loop tie cable support fasteners

- Attachment of all types of MC/AC cable and high performance cable such as fiber optic and CAT 5
- Pre-assembled part combinations allow quick installation to vertical and horizontal flanges, purlin, drop wire, threaded rod and acoustical tee bar
- The hook and loop type strap makes mounting and adjustment quick and easy
- Perfect product for applications where easy access to the cable bundle after installation is required

Loop tie cable support fasteners

Cat. no.	Fig. no.	Description	Qty. per box
FO350-40-0	1	Additional 13 in. loop tie straps, black	25
SSF-VL13-F1/4	2	13 in. Loop tie with ¼ in. flange clip attachment	25
SSF-VL13-F1/2	2	13 in. Loop tie with ½ in. flange clip attachment	25
SSF-VL13-BC	3	13 in. Loop tie with beam clamp attachment	25
SSF-VL13-UC	4	13 in. Loop tie with utility clip attachment	25
SSF-VL13-AB	5	13 in. Loop tie with angle bracket attachment	25
SSF-VL13-V1/4	6	13 in. Loop tie with vertical flange clip attachment	25
SSF-VL13-A1/4	7	13 in. Loop tie with Z purlin clip attachment	25
SSF-VL13-CH	8	13 in. Loop tie with TCH acoustical tee bar mounting attachment	25

Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

Fig. 6

Fig. 7



Fig. 8

Low voltage/telecommunication supports



Fig. 1

Cable supports

- Bridle rings can be combined with these other Steel City spring steel fastener products: BBC beam clamp, BH series flange clips and TC series acoustical tee
- Bright zinc electro-plated finish

Threaded bridle ring

Cat. no.	Fig. no.	Eye dia.	Thread	Specifications	Max. load (lb)	Qty. per box
SSF-VR3/4A	1	¾ in.	#10-24	Machine screw bridle ring	50	100
SSF-VR1 1/4A	1	1¼ in.	#10-24	Machine screw bridle ring	50	100
SSF-VR1 3/4A	1	1¾ in.	#10-24	Machine screw bridle ring	50	100
SSF-VR1 1/4B	1	1¼ in.	¼-20	Machine screw bridle ring	50	100
SSF-VR1 5/8B	1	1⅝ in.	¼-20	Machine screw bridle ring	50	100
SSF-VR 2B	1	2 in.	¼-20	Machine screw bridle ring	50	100
SSF-VR 4B	1	4 in.	¼-20	Machine screw bridle ring	50	100
SSF-VR1 5/8D	2	1⅝ in.	#14	Wood screw bridle ring	75	100
SSF-VR1 1/4D	2	1¼ in.	#14	Wood screw bridle ring	75	100
SSF-VR3E	2	3 in.	#18	Wood screw bridle ring	75	100
SSF-VR7/8C	2	⅞ in.	#10	Wood screw bridle ring	50	100



Fig. 1



Fig. 2

Low voltage/telecommunication supports



Fig. 1

Low voltage

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work

Low voltage mounting brackets – screw-on support

Cat. no.	Fig. no.	Description	Qty. per box
SSF-SLV*	1	Old work or new work low voltage bracket	100
VN1*	2	Nonmetallic single-gang new work low voltage bracket	50
VN2*	–	Nonmetallic two-gang new work low voltage bracket	50
VW1*	3	Nonmetallic single-gang old work low voltage bracket	50
VW2	–	Nonmetallic two-gang old work low voltage bracket	50
WBF-1*	4	Low voltage mounting bracket with screws	100
CIMB-1	5	Mounting bracket, raised ½ in.	25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

* CSA not applicable

Accessories

Miscellaneous components



Fig. 1

Miscellaneous hangers

- Rod hanger with or without thread impression available for ¼ in. and ⅜ in. threaded rod

Miscellaneous hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
F-HB8	1	Rod & wire hanger, #8 wire	160	100
SSF-HB1/4	1	Rod & wire hanger, ¼ in. plain rod	160	100
SSF-HB3/8	1	Rod & wire hanger, ⅜ in. plain rod	160	100



Fig. 1



Fig. 3

Miscellaneous hangers

- Rod hanger available for ¼ in. and ⅜ in. threaded rod with or without thread impression
- Various steel brackets with ¼ in. holes and galvanized finish

Miscellaneous hangers

Cat. no.	Fig. no.	Description	Static load limit (lb)	Qty. per box
SSF-HOB	2	Offset bracket with ¼ in. hole	160	100
SSF-HSAB	3	Short angle bracket with ¼ in. hole	160	100
SSF-HFB*	4	Flat bracket with ¼ in. hole	160	100
SSF-TA7*	5	For T-grid, with 1 in. snap-in conduit clip	–	100



Fig. 2



Fig. 3

Fig. 4

Fig. 5

*UL not applicable

Accessories

Miscellaneous components



Fig. 1

Pipe sleeve positioner

- Provides secure positioning of pipe sleeve for concrete pouring of wall and floor forms
- Accommodates up to Schedule 80 pipe wall thicknesses
- Installs easily with a hammer

Pipe sleeve positioner

Cat. no.	Fig. no.	Sleeve dia. (in.)	Description/wall thickness	Qty. per box
SSF-MPS	1	All	Pipe sleeve positioner, 5/16 in. and under	100
SSF-MPS	1	2–6	Pipe sleeve positioner, Schedule 40 Pipe	100
SSF-BF1/2	1	6	Pipe sleeve positioner, Schedule 80 Pipe	100
SSF-BF1/2	2	8–10	Pipe sleeve positioner, Schedule 40 Pipe	100
SSF-BF3/4	2	9–14	Pipe sleeve positioner, Schedule 80 Pipe	100



Fig. 1



Fig. 2

Accessories

Miscellaneous components



Fig. 1 and 2

S-hook and jack chain

- Order S-hook and jack chain with your Steel City spring steel fasteners to save on freight, energy and purchase orders

S-hook and jack chain

Cat. no.	Fig. no.	Trade size	Description	Static load limit (lb)	Qty. per box/per foot
CI-8905	1	–	S-hook	90	100
CI-8903	2	#2	Jack chain	115	100
8903SP2	2	#2	Jack chain	115	200
8903SP5	2	#2	Jack chain	115	500
CI-8904	2	#3	Jack chain	90	100
8904SP2	2	#3	Jack chain	90	200
8904SP5	2	#3	Jack chain	90	500
CI-8910	2	#10-T	Jack chain	43	50
8910SP2	2	#10-T	Jack chain	43	200
8910SP5	2	#10-T	Jack chain	43	500
CI-8912	2	#12	Jack chain	29	50

Fig. 1

Fig. 2

Accessories

Miscellaneous components



Fig. 1

Signal reference grid wire clamp

- Supports signal reference grid wires below computer room floors
- One fastener supports wire sizes #8 stranded (0.146 in.) to #4 stranded (0.232 in.)
- Fits post sizes ¾ in. to 1 in. round or square
- Slots in fastener grip wire provide positive contact with post
- Clamps grid wire directly to post, allowing a low resistance connection across bare metal contacts
- Installs easily with a screw driver or nut driver

Signal reference grid wire clamp

Cat. no.	Fig. no.	Description	Qty. per box
3900	1	Signal reference grid wire clamp	100



Fig. 1



Fig. 2

Deck hanger

- Easy method to hang items below decking
- Requires pre-drilled hole ¼ in. diameter
- Works for material thicknesses up to ⅛ in.

Deck hanger

Cat.no.	Fig. no.	Description	Qty. per box
SSF-MNH	2	Deck hanger clip	100



Fig. 2

Cross reference – B-Line*

B-Line	Steel City	Page
ATR 1/4 X 36	H104-1/4X10EG	–
ATR 1/4 X 72	H104-1/4X10EG	–
ATR 3/8 X 36	H104 3/8X10EG	–
ATR 3/8 X 72	H104 3/8X10EG	–
B1508S	CPC050	–
B1512S	CPC075	–
B1516S	CPC100	–
B1520S	CPC125	–
B1524S	CPC150	–
B1532S	CPC200	–
B1534S	CPC250	–
B1540S	CPC250	–
B1548S	CPC300	–
B1556S	CPC350	–
B1564S	CPC400	–
B3223-3/8	SSF-HA3/8-OBT	**B11**
B444-1/4	510	–
B444-3/8	502	–
B671-1/2	EC1/2	–
B844-3/8	502	–
BA1	SSF-TS5/8	**B36**
BA12	SSF-TH24	**B35**
BA12-12	SSF-TH12	**B35**
BA12-20	SSF-TH20	**B35**
BA12-30	SSF-TH30	**B35**
BA1-24	SSF-TS1 1/2	**B36**
BA-12-OB-24	SSF-TH24	**B35**
BA-12-OB-34	SSF-TH24	**B35**
BA-12-SB-24	SSF-TH24	**B35**
BA13	SSF-TH24A	**B35**
BA1-32	SSF-TS2	**B36**
BA13-4 1/4	SSF-TH24A	**B35**
BA14	SSF-TCHT	**B37**
BA15	SSF-TFC	**B36**
BA1-T	SSF-TS5/8	**B36**
BA1-TBN	SSF-TS5/8	**B36**
BA20	SSF-TL24	**B35**
BA-2-16	SSF-T15T8-5/8	**B40**
BA-2-16-BN	SSF-T15T8-7/16	**B40**
BA-2-16-W	SSF-T15T8-5/8WH	**B40**
BA-2-16-WBN	SSF-T15T8-7/16WH	**B40**
BA28	SSF-TA7	**B38, B49**
BA-2-9	SSF-T9T8-5/8	–
BA-2-9-7	SSF-T9T8-7/16	–
BA-2-9-7-BN	SSF-T9T8-5/8	–
BA-2-9-W	SSF-T9T8-5/8WH	–
BA-2-9-WBN	SSF-T9T8-5/8WH	–

B-Line	Steel City	Page
BA-4-16	SSF-T15T5/8	**B40**
BA-4-16-24	SSF-T15T1 1/2WH	**B40**
BA-4-16-32	SSF-T15T2	**B40**
BA-4-16-48	SSF-T15T3	**B40**
BA-4-16H	SSF-T15TSH	**B40**
BA-4-16-H1	SSF-T15TSH	**B40**
BA-4-16-LN	SSF-T15T5/8	**B40**
BA-4-16-LS	SSF-T15T5/8	**B40**
BA-4-16-W	SSF-T15T5/8WH	**B40**
BA-4-9	SSF-T9T5/8	–
BA49-LN	SSF-T9T5/8	–
BA-4-9-LS	SSF-T9T5/8	–
BA-4-9-W	SSF-T9T5/8WH	–
BA-4-WN	SSF-TWN1/4	–
BA5-4T	SSF-TCVT	**B37**
BA6-4T	SSF-TCHT	**B37**
BAX-4-16	SSF-T15T5/8	**B40**
BAX-4-16-24	SSF-T15T1 1/2WH	**B40**
BAX-4-16-32	SSF-T15T2	**B40**
BAX-4-16-48	SSF-T15T3	**B40**
BA-8-12-A5	SSF-TCV-C1/2 3/4	**B37**
BA-8-12-A6	SSF-TCH-C1/2 3/4	**B37**
BB1	SSF-SK	**B26**
BB10L	SSF-SLV	**B33, B48**
BB-15	CIMB-1	**B33, B48**
BB-18	SSF-SV12	**B30**
BB2-16	SSF-SG1-16	–
BB2-16D	SSF-SG2-16	–
BB2-16T	SSF-SG16A	**B29**
BB2-24	SSF-SG1-24	–
BB2-24D	SSF-SG2-24	–
BB2-24T	SSF-SG24A	**B29**
BB25	SSF-SH2346	**B29**
BB25-10	SSF-SH2346	**B29**
BB27	SSF-THC	**B35**
BB3	SSF-SHSB	**B31**
BB32	SSF-SR	**B34**
BB33	CI820D	**B33**
BB33L		**B33**
BB38	SSF-SS1/2 3/4	**B26**
BB4-23	SSF-SH2346	**B29**
BB4-4	SSF-SH2346	**B29**
BB4-6	SSF-SH2346	**B29**
BB4-XT6	SSF-S6X	**B30**
BB5-0	SSF-SFO	**B28**
BB5-10	SSF-SF5/8	**B28**
BB5-12	SSF-SF3/4	**B28**

B-Line	Steel City	Page
BB5-4	SSF-SF1/4	**B28**
BB5-6	SSF-SF3/8	**B28**
BB5-8	SSF-SF1/2	**B28**
BB6	SSF-SFT	**B28**
BB60	SSF-SX	**B27**
BB6-A	SSF-SFA	**B28**
BB7	SS1-TB	**B27**
BB8-16	SSF-SB16	**B30**
BB8-24	SSF-SB24	**B30**
BB9	SSF-SMX	**B26**
BC1	SSF-BBC	**B6**
BC442	BC1-TB	–
BC442-6	BC2-TB	–
BCH21	SSF-VJ1 5/16	**B43**
BCH21-A28	SSF-VJ1 5/16-A7	**B44**
BCH21-AB	SSF-VJ1 5/16-AB	**B44**
BCH21-C2	SSF-VJ1 5/16-BC-AB	**B43**
BCH21-C442	SSF-VJ1 5/16-BC-AB	**B43**
BCH21E-2-4	SSF-VJ1 5/16-F1/4	**B43**
BCH21-E-5-8	SSF-VJ1 5/16-F1/2	**B43**
BCH21-E-9-12	SSF-VJ1 5/16-F3/4	**B43**
BCH21-F3	SSF-VJ1 5/16-V1/4	**B44**
BCH21-F4	SSF-VJ1 5/16-A1/4	**B44**
BCH21H	SSF-VJ1 5/16	**B44**
BCH21-RB	SSF-VJ1 5/16-AB	**B44**
BCH21SS4	SSF-VJ1 5/16	**B44**
BCH21-U-2-4	SSF-VJ1 5/16-H1/4-AB	**B44**
BCH21U-5-8	SSF-VJ1 5/16-H1/2-AB	**B44**
BCH21-U-9-12	SSF-VJ1 5/16-H3/4-AB	**B44**
BCH21-W2	SSF-VJ1 5/16-UC	**B44**
BCH21-W6	SSF-VJ1 5/16-UC	**B44**
BCH32	SSF-VJ2	**B43**
BCH32-A28	SSF-VJ2-A7	**B44**
BCH32-AB	SSF-VJ2-AB	**B44**
BCH32-C2	SSF-VJ2-BC-AB	**B43**
BCH32-C442	SSF-VJ2-BC-AB	**B43**
BCH32E-2-4	SSF-VJ2-F1/4	**B43**
BCH32-E-5-8	SSF-VJ2-F1/2	**B43**
BCH32-E-9-12	SSF-VJ2-F3/4	**B43**
BCH32-F3	SSF-VJ2-V1/4	**B44**
BCH32-F4	SSF-VJ2-A1/4	**B44**
BCH32H	SSF-VJ2	**B43**

* B-Line is a registered trademark of Cooper Technologies Company.

Cross reference – B-Line

B-Line	Steel City	Page
BCH32H-SM	SSF-VJ2-A7	**B44**
BCH32-RB	SSF-VJ1 5/16-AB	**B44**
BCH32-W2	SSF-VJ2-UC	**B44**
BCH32-W6	SSF-VJ2-UC	**B44**
BCR4	SSF-SC6	–
BD2	SSF-HFB	**B13, B49**
BD4	SSF-HOB	**B13, B49**
BD40	SSF-MPS	**B50**
BE-1-2	SSF-BF1/8	**B7**
BE-2-4	SSF-BF1/4	**B7**
BE-5-8	SSF-BF1/2	**B7, B50**
BE-9-12	SSF-BF3/4	**B7, B50**
BF1	SSF-BV1/16	**B10**
BF12	SSF-BZ1	**B8**
BF13	SSF-BZ2	**B8**
BF1-40	SS1-TB	**B27**
BF1-56	SS1-TB	**B27**
BF1-64	SS1-TB	**B27**
BF2	SSF-BV1/4	**B10**
BF3	SSF-BV1/4	**B10**
BF4	SSF-BA1/4	**B8**
BFA-1215	SSF-CAXL1	**B19**
BFA-1520	SSF-CAXL2	**B19**
BG-16	SSF-CC1	**B14**
BG-16-4T	SSF-CC1T	**B14**
BG-16-B1	SSF-SK-C1	**B26**
BG-16-B1	SSF-SK-S1	**B26**
BG-16-B5	SSF-SF-S1	**B28**
BG-16-C1	SSF-BBC-C1H	**B6**
BG-16-C2	SSF-BBC-C1V	**B6**
BG-16-E-2-4	SSF-CC1-F1/4	**B15**
BG-16-E-2-4-AS	SSF-CC1-F1/4	**B15**
BG-16-E-5-8	SSF-CC1-F1/2	**B15**
BG-16-E-5-8-AS	SSF-CC1-F1/2	**B15**
BG-16-E-9-12	SSF-CC1-F3/4	**B15**
BG-16-E-9-12-AS	SSF-CC1-F3/4	**B15**
BG-16-F13	SSF-BZ2-C1	**B9**
BG-16-G-16	SSF-CC1-C1	**B21**
BG-16-G-20	SSF-CC1-C1 1/4	**B21**
BG-16-G-24	SSF-CC1-C1 1/2	**B21**
BG-16-G-32	SSF-CC1-C2	**B21**
BG-16-G-6	SSF-CC1-C3/8	**B21**
BG-16-G-8-12	SSF-CC1-C1/2 3/4	**B21**
BG-16-S18	SSF-CX18-C1	**B23**
BG-16-S18-U-2-4	SSF-CX18-C1-H1/4	**B23**
BG-16-S18-U-5-8	SSF-CX18-C1-H1/2	**B23**
BG-16-S18-W2	SSF-CX18-C1UC	**B23**
BG-16-U-2-4	SSF-CC1-H1/4	**B15**
BG-16-U-2-4-AS	SSF-CC1-H1/4	**B15**
BG-16-U-5-8	SSF-CC1-H1/2	**B15**
BG-16-U-5-8-AS	SSF-CC1-H1/2	**B15**
BG-16-U-9-12	SSF-CC1-H3/4	**B15**
BG-16-U-9-12-AS	SSF-CC1-H3/4	**B15**
BG-16-W2	SSF-CUC-C1	**B17**
BG-16-W6	SSF-CUC-C1	**B17**
BG-20	SSF-CC1 1/4	**B14**
BG-20-4T	SSF-CC1 1/4T	**B14**
BG-20-C1	SSF-BBC-C1 1/4H	**B6**
BG-20-C2	SSF-BBC-C1 1/4V	**B6**
BG-20-E-2-4	SSF-CC1 1/4-F1/4	**B15**
BG-20-E-5-8	SSF-CC1 1/4-F1/2	**B15**
BG-20-E-9-12	SSF-CC1 1/4-F3/4	**B15**
BG-20-F13	SSF-BZ2-C1 1/4	**B9**
BG-20-U-2-4	SSF-CC1 1/4-H1/4	**B15**
BG-20-U-5-8	SSF-CC1 1/4-H1/2	**B15**
BG-20-U-9-12	SSF-CC1 1/4-H3/4	**B15**
BG-24	SSF-CC1 1/2	**B14**
BG-24-4T	SSF-CC1 1/2T	**B14**
BG-24-C1	SSF-BBC-C1 1/2H	**B6**
BG-24-C2	SSF-BBC-C1 1/2V	**B6**
BG-24-E-2-4	SSF-CC1 1/2-F1/4	**B15**
BG-24-E-5-8	SSF-CC1 1/2-F1/2	**B15**
BG-24-E-9-12	SSF-CC1 1/2-F3/4	**B15**
BG-24-U-2-4	SSF-CC1 1/2-H1/4	**B15**
BG-24-U-5-8	SSF-CC1 1/2-H1/2	**B15**
BG-24-U-9-12	SSF-CC1 1/2-H3/4	**B15**
BG-32	SSF-CC2	**B14**
BG-32-4T	SSF-CC2T	**B14**
BG-32-C1	SSF-BBC-C2H	**B6**
BG-32-C2	SSF-BBC-C2V	**B6**
BG-32-E-2-4	SSF-CC2-F1/4	**B15**
BG-32-E-5-8	SSF-CC2-F1/2	**B15**
BG-32-E-9-12	SSF-CC2-F3/4	**B15**
BG-32-U-2-4	SSF-CC2-H1/4	**B15**
BG-32-U-5-8	SSF-CC2-H1/2	**B15**
BG-32-U-9-12	SSF-CC2-H3/4	**B15**
BG-6	SSF-CC3/8	**B14**
BG-6	SSF-CC3/8T	**B14**
BG-6-4T	SSF-CC1/2 3/4T	**B14**
BG-6-B5	SSF-SF-C3/8	**B28**
BG-6-E-2-4	SSF-CC3/8-F1/4	**B15**
BG-6-E-5-8	SSF-CC3/8-F1/2	**B15**
BG-6-E-9-12	SSF-CC3/8-F3/4	**B15**
BG-6-F13	SSF-BZ2-C3/8	**B9**
BG-6-H7	SSF-SAB-S3/4	**B32**
BG-6-S18	SSF-CX18-C1UC	**B23**
BG-6-S18	SSF-CX18-C3/8UC	**B23**
BG-6-S18	SSF-CX18-C1/2 3/4UC	**B23**
BG-6-S18-U-2-4	SSF-CX18-C3/8H1/4	**B23**
BG-6-S18-U-5-8	SSF-CX18-C3/8H1/2	**B23**
BG-6-S18-W2	SSF-CX18-C3/8UC	**B23**
BG6-U-2-4	SSF-CC3/8-H1/4	**B15**
BG-6-U-5-8	SSF-CC3/8-H1/2	**B15**
BG-6-U-9-12	SSF-CC3/8-H3/4	**B15**
BG-8-12	SSF-CC1/2 3/4	**B14**
BG-812-4T	SSF-CC1/2 3/4T	**B14**
BG-8-12-A5	SSF-TCV-C1/2 3/4	**B37**
BG-8-12-A6	SSF-TCH-C1/2 3/4	**B37**
BG-8-12-B1	SSF-SK-C1/2 3/4	**B26**
BG-8-12-B5	SSF-SF-C1/2 3/4	**B28**
BG-8-12-C1	SSF-BBC-C1/2 3/4H	**B6**
BG-8-12-C2	SSF-BBC-C1/2 3/4V	**B6**
BG-8-12-E-2-4	SSF-CC1/2 3/4-F1/4	**B15**
BG-8-12-E-5-8	SSF-CC1/2 3/4-F1/2	**B15**
BG-8-12-E-5-8-AS	SSF-CC1/2 3/4-F1/2	**B15**
BG-8-12-E-9-12	SSF-CC1/2 3/4-F3/4	**B15**
BG-8-12-E-9-12-AS	SSF-CC1/2 3/4-F3/4	**B15**
BG-8-12-F13	SSF-BZ2-C1/2 3/4	**B9**
BG-8-12-H7	SSF-SAB-C1/2 3/4	**B32**
BG-8-12-S18	SSF-CX18-C1/2 3/4	**B23**
BG-8-12-S18-U-2-4	SSF-CX18-C1/2 3/4-H1/4	**B23**
BG-8-12-S18-U-5-8	SSF-CX18-C1/2 3/4-H1/2	**B23**
BG-8-12-S18-W2	SSF-CX18-C1/2 3/4UC	**B23**
BG-8-12-U-2-4	SSF-CC1/2 3/4-H1/4	**B15**
BG-8-12-U-5-8	SSF-CC1/2 3/4-H1/2	**B15**
BG-8-12-U-5-8-AS	SSF-CC1/2 3/4-H1/2	**B15**

Cross reference – B-Line

B-Line	Steel City	Page
BG-8-12-U-9-12	SSF-CC1/2 3/4-H3/4	**B15**
BG-8-12-U-9-12-AS	SSF-CC1/2 3/4-H3/4	**B15**
BG-8-12-W2	SSF-CUC-C1/2 3/4	**B17**
BG-8-12-W6	SSF-CUC-C1/2 3/4	**B17**
BH1	SSF-HB1/4	**B13, B49**
BH1	SSF-HB8	**B13**
BH10	CI-8905	**B42, B51**
BH-1-2-R	SSF-HR-F1/4	**B13**
BH15	CI-8932	**B41**
BH16	CI-8932	**B41**
BH1-E-2-4	SSF-HB1/4-F1/4	**B12**
BH1-E-2-4	SSF-HB8-F1/4	**B12**
BH1-E-5-8	SSF-HB1/4-F1/2	**B12**
BH1-E-5-8	SSF-HB8-F1/2	**B12**
BH1-E-9-12	SSF-HB1/4-F3/4	**B12**
BH1-E-9-12	SSF-HB8-F3/4	**B12**
BH1-F1	SSF-BA1/4-B1/4	**B8**
BH1-F1	SSF-BA1/4-B8	**B8**
BH1-F1	SSF-BV1/16-B1/4	**B10**
BH1-F1	SSF-BV1/16-B8	**B10**
BH1-F12	SSF-BZ1-B1/4	**B9**
BH1-F12	SSF-BZ1-B8	**B9**
BH1-F2	SSF-BV1/4-B8	**B10**
BH1-F3	SSF-BV1/4-B8	**B10**
BH1-F4	SSF-BA1/4-B8	**B8**
BH1-H7	SSF-HB1/4-AB	**B11**
BH1-H7	SSF-HB8-AB	**B11**
BH1-H8	SSF-HB1/4-OB	**B11**
BH2	SSF-HB3/8	**B13, B49**
BH-2-4	SSF-HS-F1/4	**B13**
BH-2-4-R	SSF-HR-F1/4	**B13**
BH2-E-2-4	SSF-HB3/8-F1/4	**B12**
BH2-E-5-8	SSF-HB3/8-F1/2	**B12**
BH2-E-9-12	SSF-HB3/8-F3/4	**B12**
BH2-F1	SSF-BV1/16-B3/8	**B10**
BH2-F12	SSF-BZ1-A3/8T	**B9**
BH2-F2	SSF-BV1/4-B3/8	**B10**
BH2-F3	SSF-BV1/16-B3/8	**B10**
BH2-F4	SSF-BA1/4-B8	**B8**
BH2-H7	SSF-HB3/8-AB	**B11**
BH2-H8	SSF-HB3/8-OB	**B11**
BH4-E-2-4	SSF-HA1/4-F1/4T	**B12**
BH4-E-2-4-AS	SSF-HA1/4-F1/4T	**B12**
BH4-E-5-8	SSF-HA1/4-F1/2T	**B12**
BH4-E-5-8-AS	SSF-HA1/4-F1/2T	**B12**
BH4-E-9-12	SSF-HA1/4-F3/4T	**B12**
BH4-E-9-12-AS	SSF-HA1/4-F3/4T	**B12**
BH4-F1	SSF-BV1/16-A1/4T	**B10**
BH4-F12	SSF-BZ1-A1/4T	**B9**
BH4-F2	SSF-BV1/4-A1/4T	**B10**
BH4-F3	SSF-BV1/16-A1/4T	**B10**
BH4-F4	SSF-BA1/4-A1/4T	**B8**
BH4-H8	SSF-HA1/4-OBT	**B11**
BH-5-8	SSF-HS-F1/2	**B13**
BH-5-8-R	SSF-HR-F1/2	**B13**
BH5-F12	SSF-BZ1-A3/8	**B9**
BH5-F4	SSF-BZ1-A3/8	**B9**
BH5-H8	SSF-HA3/8-OB	**B11**
BH6-F12	SSF-BZ1-B3/8	**B9**
BH6-F12	SSF-BZ1-A1/4T	**B9**
BH6-F12-AS	SSF-BZ1-A1/4T	**B9**
BH6-F4	SSF-BA1/4-A3/8T	**B8**
BH6-H8	SSF-HA3/8-OBT	**B11**
BH7	SSF-HSAB	**B13, B49**
BH7-6	SSF-HSAB	**B13, B49**
BH8	SSF-HOB	**B13, B49**
BH8-6	SSF-HOB	**B13, B49**
BH9	CI-8912	**B42, B51**
BH9-10	CI-8912	**B42, B51**
BH-9-12	SSF-HS-F3/4	**B13**
BH-9-12-R	SSF-HR-F3/4	**B13**
BHE-1-2	SSF-HS-F1/4	**B13**
BL1400	6H0 TB	–
BL1410	6H1 TB	–
BL1420	6H2-TB	–
BL1425	6H2 1/2-TB	–
BL1430	6H3-TB	–
BL1440	6H4-TB	–
BL1450	6H5-TB	–
BL1460	6H6 B	–
BL1470	6H7 B	–
BL1480	6H8 B	–
BL1490	6H9 B	–
BM1	1300	**B32**
BM1M	1300	**B32**
BM2	1216-EN	**B32**
BM3	CI66	**B34**
BM5	3900	**B52**
BP-12	SSF-CS3/4	**B14**
BP-12-4T	SSF-CS3/4T	**B14**
BP-12-A28	SSF-TA7-S3/4	**B38**
BP-12-A5	SSF-TCV-S3/4	**B37**
BP-12-A6	SSF-TCH-S3/4	**B37**
BP-12-B1	SSF-SK-S3/4	**B26**
BP-12-B5	SSF-SF-S3/4	**B28**
BP-12-C1	SSF-BBC-S3/4H	**B6**
BP-12-C2	SSF-BBC-S3/4V	**B6**
BP-12-D3	SSF-CS3/4-FB	**B24**
BP-12-D4	SSF-CS3/4-OB	**B24**
BP-12-E-2-4	SSF-CS3/4-F1/4	**B12**
BP-12-E-5-8	SSF-CS3/4-F1/2	**B12**
BP-12-E-9-12	SSF-CS3/4-F3/4	**B12**
BP-12-F13	SSF-BZ2-S3/4	**B9**
BP-12-H7	SSF-SAB-S3/4	**B32**
BP-12-P-12	SSF-CS3/4-S3/4	**B21**
BP-12-P-16	SSF-CS3/4-S1	**B21**
BP-12-U-2-4	SSF-CS3/4-H1/4	**B16**
BP-12-U-5-8	SSF-CS3/4-H1/2	**B16**
BP-12-U-9-12	SSF-CS3/4-H3/4	**B16**
BP-12-W2	SSF-CUC-S3/4	**B17**
BP-12-W6	SSF-CUC-S3/4	**B17**
BP-16	SSF-CS3/4	**B14**
BP-16-4T	SSF-CS1T	**B14**
BP-16-A28	SSF-TA7-S1	**B38**
BP-16-A5	SSF-TCV-S1	**B37**
BP-16-A5	SSF-TCV-S3/4	**B37**
BP-16-A6	SSF-TCH-S1	**B37**
BP-16-A6	SSF-TCH-S3/4	**B37**
BP-16-B1	SSF-SK-S1	**B26**
BP-16-B5	SSF-SF-S1	**B28**
BP-16-C1	SSF-BBC-S1H	**B6**
BP-16-C2	SSF-BBC-S1V	**B6**
BP-16-D4	SSF-CS1-OB	**B24**
BP-16-E-2-4	SSF-CS1-F1/4	**B16**
BP-16-E-5-8	SSF-CS1-F1/2	**B16**
BP-16-E-9-12	SSF-CS1-F3/4	**B16**
BP-16-F13	SSF-BZ2-S1	**B9**
BP-16-P-16	SSF-CS1-S1	**B21**
BP-16-U-2-4	SSF-CS1-H1/4	**B16**
BP-16-U-5-8	SSF-CS1-H1/2	**B16**
BP-16-U-9-12	SSF-CS1-H3/4	**B16**
BP-16-U-9-12	SSF-CS1-F3/4	**B16**
BP-16-W2	SSF-CUC-S1	**B17**
BP-16-W6	SSF-CUC-S1	**B17**
BP-8	SSF-CS1/2	**B14**
BP-8-12-H7	SSF-SAB-C1/2 3/4	**B32**
BP-8-4T	SSF-CS1/2T	**B14**
BP-8-A28	SSF-TA7-S1/2	**B28**
BP-8-A5	SSF-TCV-S1/2	**B37**

Cross reference – B-Line

B-Line	Steel City	Page
BP-8-A6	SSF-TCH-S1/2	**B37**
BP-8-B1	SSF-SK-S1/2	**B26**
BP-8-B5	SSF-SF-S1/2	**B28**
BP-8-C1	SSF-BBC-S1/2H	**B6**
BP-8-C2	SSF-BBC-S1/2V	**B6**
BP-8-D3	SSF-CS1/2-FB	**B24**
BP-8-D4	SSF-CS1/2-OB	**B24**
BP-8-E-2-4	SSF-CS1/2-F1/4	**B16**
BP-8-E-5-8	SSF-CS1/2-F1/2	**B16**
BP-8-E-9-12	SSF-CS1/2-F3/4	**B16**
BP-8-F13	SSF-BZ2-S1/2	**B9**
BP-8-H7	SSF-SAB-S1/2	**B32**
BP-8-P-12	SSF-CS1/2-S3/4	**B21**
BP-8-P-16	SSF-CS1/2-S1	**B21**
BP-8-P-8	SSF-CS1/2-S1/2	**B21**
BP-8-U-2-4	SSF-CS1/2-H1/4	**B16**
BP-8-U-5-8	SSF-CS1/2-H1/2	**B16**
BP-8-U-9-12	SSF-CS1/2-H3/4	**B16**
BP-8-W2	SSF-CUC-S1/2	**B17**
BP-8-W6	SSF-CUC-S1/2	**B17**
BPC-12	703-3/4EG	–
BPC-16	703-1EG	–
BPC-20	703-1-1/4EG	–
BPC-24	703-1-1/2EG	–
BPC-32	703-2EG	–
BPC-40	701-287PG	Superstrut
BPC-48	701-350PG	Superstrut
BPC-56	701-400PG2	Superstrut
BPC-64	701-450PG	Superstrut
BPC-8	703-1/2EG	–
BR-20-T	SSF-VR1 1/4A	**B47**
BR-20-4T	SSF-VR1 1/4B	**B47**
BR-32-4W	SSF-VR1 5/8B	**B47**
BU-2-4	SSF-BH1/4	**B7**
BU-2-4-S	SSF-BH1/4S	**B7**
BU-2-4-S-AS	SSF-BH1/4S	**B7**
BU-5-8	SSF-BH1/2	**B7**
BU-5-8-S	SSF-BH1/2S	**B7**
BU-5-8-S-AS	SSF-BH1/2S	**B7**
BU-9-12	SSF-BH3/4	**B7**
BU-9-12-S	SSF-BH3/4S	**B7**
BU-9-12-S-AS	SSF-BH3/4S	**B7**
BW-12	SSF-CK3/4	**B18**
BW-16	SSF-CK1	**B18**
BW2	SSF-CUC	**B17**
BW-20	SSF-CK1	**B18**
BW4	SSF-CK535	**B18**

B-Line	Steel City	Page
BW-8	SSF-CK1/2	**B18**
BX4	SSF-CC3/8	**B15**
BX4-E-2-4	SSF-CC3/8-F1/4	**B15**
BX4-E-5-8	SSF-CC3/8-F1/2	**B15**
BX4-E-9-12	SSF-CC3/8-F3/4	**B15**
BX4-F13	SSF-BZ2-C3/8	**B9**
BX4-H7	SSF-SAB-C3/8	**B32**
BX-4M	SSF-CR2	**B22**
BX4-U-2-4	SSF-CC3/8-H1/4	**B15**
BX4-U-5-8	SSF-CC3/8-H1/2	**B15**
BX4-U-9-12	SSF-CC3/8-H3/4	**B15**
BX5	SSF-SF-C3/8	**B28**
BX-8	SSF-CB706	**B17**
BX-8-B	SSF-CB706	**B17**
BX81	SSF-SP1	**B32**
BX9	SSF-CM535	**B20**
BXL-1011	SSF-CEL437	**B19**
BXL-1214	SSF-CEL562	**B19**
BXL-1519	SSF-CEL718	**B19**
BXL-2024	SSF-CEL937	**B19**
BXL-2530	SSF-CEL1250	**B19**
BXL-67	SSF-CEL218	**B19**
BXL-67	SSF-CEL281	**B19**
BXL-89	SSF-CEL375	**B19**
BXM-1011	SSF-CEM437	**B19**
BXM-1214	SSF-CEM562	**B19**
BXM-1519	SSF-CEM718	**B19**
BXM-2024	SSF-CEM937	**B19**
BXM-2530	SSF-CEM1250	**B19**
BXM-67	SSF-CEM218	**B19**
BXM-67	SSF-CEM281	**B19**
BXM-89	SSF-CEM375	**B19**
BXS-1011	SSF-CES437	**B19**
BXS-1214	SSF-CES562	**B19**
BXS-1519	SSF-CES718	**B19**
BXS-2024	SSF-CES937	**B19**
BXS-2530	SSF-CES1250	**B19**
BXS-67	SSF-CES218	**B19**
BXS-67	SSF-CES281	**B19**
BXS-89	SSF-CES375	**B19**
N224	A 100 1/4EG	–
N228	A 100 3/8EG	–
MSQN1/4	E145-1/4EG	–
SHHMS 1/4 x 1-2	E142-1/4X075EG	–
SRHMS 1/4 x 3/8	E142-1/4X075EG	–

Cross reference – Caddy*

Caddy	Steel City	Page
0502510EG	H104-1/4X10EG	–
0503710EG	H104-3/8X10EG	–
1000050EG	C727-1/2 Superstrut	
1000075EG	C727-3/4 Superstrut	
1000100EG	C727-1 Superstrut	
1000125EG	C727-1 1/4 Superstrut	
1000150EG	C727-1 1/2 Superstrut	
1000200EG	C727-2 Superstrut	
1150250EG	C727-2 1/2 Superstrut	
1150300EG	C727-3 Superstrut	
1150350EG	C727-3 1/2 Superstrut	
1150400EG	C727-4 Superstrut	
122	SSF-BZ1	**B8**
1224TI	SSF-BZ1-A1/4T	**B9**
1226A	SSF-BZ1-B3/8	**B9**
1226T	SSF-BZ1-A3/8	**B9**
1226TI	SSF-BZ1-A3/8T	**B9**
122708	SSF-BZ1-B1/4	**B9**
122708	SSF-BZ1-B8	**B9**
123	SSF-BZ2	**B8**
12312P	SSF-BZ2-S3/4	**B9**
12316M	SSF-BZ2-C1	**B9**
12316P	SSF-BZ2-S1	**B9**
12320M	SSF-BZ2-C1 1/4	**B9**
1236M	SSF-BZ2-C3/8	**B9**
123812M	SSF-BZ2-C1/2 3/4	**B9**
1238P	SSF-BZ2-S1/2	**B9**
12P	SSF-CS3/4	**B14**
12P12P	SSF-CS3/4-S3/4	**B21**
12P16P	SSF-CS3/4-S1	**B21**
12P24	SSF-CS3/4-H1/4	**B16**
12P24SM	SSF-CS3/4-F1/4	**B16**
12P4I	SSF-CS3/4T	**B14**
12P58	SSF-CS3/4-H1/2	**B16**
12P58SM	SSF-CS3/4-F1/2	**B16**
12P912	SSF-CS3/4-H3/4	**B16**
12P912SM	SSF-CS3/4-F3/4	**B16**
12PATA	SSF-TCH-S3/4	**B37**
12PATS	SSF-TCV-S3/4	**B37**
12PF	SSF-SF-S3/4	**B28**
1616M	SSF-CC1-C1	**B21**
1620M	SSF-CC1-C1 1/4	**B21**
1624M	SSF-CC1-C1 1/2	**B21**
1632M	SSF-CC1-C2	**B21**
166M	SSF-CC1-C3/8	**B21**
16812M	SSF-CC1-C1/2 3/4	**B21**
16M	SSF-CC1	**B14**
16M24	SSF-CC1-H1/4	**B15**
16M24SM	SSF-CC1-F1/4	**B15**
16M4I	SSF-CC1T	**B14**
16M58	SSF-CC1-H1/2	**B15**
16M58SM	SSF-CC1-F1/2	**B15**
16M912	SSF-CC1-H3/4	**B15**
16M912SM	SSF-CC1-F3/4	**B15**
16MB18	SSF-CX18-C1UC	**B23**
16MB1824	SSF-CX18-C1-H1/4	**B23**
16MB1858	SSF-CX18-C1-H1/2	**B23**
16MB186	SSF-CX18-C1UC	**B23**
16MB18A	SSF-CX18-C1	**B23**
16MF	SSF-SF-C1	**B28**
16P	SSF-CS1	**B14**
16P16P	SSF-CS1-S1	**B21**
16P24	SSF-CS1-H1/4	**B16**
16P24SM	SSF-CS1-F1/4	**B16**
16P4I	SSF-CS1T	**B14**
16P58	SSF-CS1-H1/2	**B16**
16P58SM	SSF-CS1-F1/2	**B16**
16P912	SSF-CS1-H3/4	**B16**
16P912SM	SSF-CS1-F3/4	**B16**
16PATA	SSF-TCH-S1	**B37**
16PATS	SSF-TCV-S1	**B37**
16PF	SSF-SF-S1	**B28**
2000037EG	C775-L 3/8 Superstrut	
2000050EG	C775-L 1/2 Superstrut	
20M	SSF-CC1 1/4	**B14**
20M24	SSF-CC1 1/4-H1/4	**B15**
20M24SM	SSF-CC1 1/4-F1/4	**B15**
20M4I	SSF-CC1 1/4T	**B14**
20M58	SSF-CC1 1/4-H1/2	**B15**
20M58SM	SSF-CC1 1/4-F1/2	**B15**
20M912	SSF-CC1 1/4-H3/4	**B15**
20M912SM	SSF-CC1 1/4-F3/4	**B15**
24M	SSF-CC1 1/2	**B14**
24M24	SSF-CC1 1/2-H1/4	**B15**
24M24SM	SSF-CC1 1/2-F1/4	**B15**
24M4I	SSF-CC1 1/2T	**B14**
24M58	SSF-CC1 1/2-H1/2	**B15**
24M58SM	SSF-CC1 1/2-F1/2	**B15**
24M912	SSF-CC1 1/2-H3/4	**B15**
24M912SM	SSF-CC1 1/2-F3/4	**B15**
2550037EG	M775-L 3/8 Superstrut	
2550050EG	M775-L 1/2 Superstrut	
2550062EG	M775-L 5/8 Superstrut	
2BRT12	SSF-VR3/4A	**B47**
2BRT20	SSF-VR1 1/4A	**B47**
2BRT32	SSF-VR1 3/4A	**B47**
2BRT8	SSF-VR3/4A	**B47**
2G9	SSF-T9T8-7/16	–
2G9S10	SSF-T9T8-5/8	–
2G9S10WH	SSF-T9T8-5/8WH	–
2G9WB	SSF-T9T8-7/16	–
2H4	SSF-BF1/8	**B7**
3000037EG	502	–
3000050EG	503-SC	–
3000062EG	M777 5/8 Superstrut	
3000075EG	M777 3/4 Superstrut	
304B2	CI66-SS	**B34**
3100037EG	M778 3/8 Superstrut	
3100050EG	M778 1/2 Superstrut	
32M	SSF-CC2	**B14**
32M24	SSF-CC2-H1/4	**B15**
32M24SM	SSF-CC2-F1/4	**B15**
32M4I	SSF-CC2T	**B14**
32M58	SSF-CC2-H1/2	**B15**
32M58SM	SSF-CC2-F1/2	**B15**
32M912	SSF-CC2-H3/4	**B15**
32M912SM	SSF-CC2-F3/4	**B15**
350	SSF-SK	**B26**
35012P	SSF-SK-S3/4	**B26**
35016M	SSF-SK-C1	**B26**
35016P	SSF-SK-S1	**B26**
350812M	SSF-SK-C1/2 3/4	**B26**
3508P	SSF-SK-S1/2	**B26**
4180050EG	C711-1/2 Superstrut	
4180075EG	C711-3/4 Superstrut	
4180100EG	C711-1 Superstrut	
4180125EG	C711-125 Superstrut	
4180150EG	C711-1 1/2 Superstrut	
4180200EG	C711-2 Superstrut	
4180250EG	C711-2 1/2 Superstrut	
4180300EG	C711-3 Superstrut	
4180350EG	C711-3 1/2 Superstrut	
4180400EG	C711-4 Superstrut	
449	SSF-CM535	**B20**
4ACS	SSF-TCHT	**B37**
4BRT20	SSF-VR1 1/4B	**B47**
4BRT20BP	SSF-VR1 1/4B	**B47**
4BRT20WS	SSF-VR1 1/4D	**B47**
4BRT20WSBP	SSF-VR1 1/4D	**B47**
4BRT32	SSF-VR1 5/8B	**B47**

*Caddy is a registered trademark of Erico, Inc.

Cross reference – Caddy

Caddy	Steel City	Page
4BRT32BP	SSF-VR1 5/8B	**B47**
4BRT32WS	SSF-VR1 5/8D	**B47**
4BRT32WSBP	SSF-VR1 5/8D	**B47**
4BRT64	SSF-VR 4B	**B47**
4G16	SSF-T15T5/8	**B40**
4G1615	SSF-T15T1 1/2	**B40**
4G162	SSF-T15T2	**B40**
4G163	SSF-T15T3	**B40**
4G16BP	SSF-T15T5/8	**B40**
4G16H	SSF-T15TSH	**B40**
4G16LN	SSF-T15T5/8	**B40**
4G16LS	SSF-T15T5/8	**B40**
4G8	SSF-T15T8-5/8	**B40**
4G8S7	SSF-T15T8-7/16	**B40**
4G8S7WB	SSF-T15T8-7/16	**B40**
4G8S7WH	SSF-T15T8-7/16WH	**B40**
4G8WB	SSF-T15T8-5/8	**B40**
4G8WH	SSF-T15T8-5/8WH	**B40**
4G8WHWB	SSF-T15T8-5/8WH	**B40**
4G9	SSF-T9T5/8	**–**
4G9LN	SSF-T9T5/8	**–**
4G9LS	SSF-T9T5/8	**–**
4H24	SSF-BF1/4	**B7**
4H58	SSF-BF1/2	**B7, B50**
4H912	SSF-BF3/4	**B7, B50**
4TI24	SSF-HA1/4-F1/4T	**B12**
4TI58	SSF-HA1/4-F1/2T	**B12**
4TI912	SSF-HA1/4-F3/4T	**B12**
4TIO	SSF-HA1/4-OBT	**B11**
4WN	SSF-TWN1/4	**–**
4Z34	SSF-CUC	**B17**
4Z3412P	SSF-CUC-S3/4	**B17**
4Z3416M	SSF-CUC-C1	**B17**
4Z3416P	SSF-CUC-S1	**B17**
4Z34812M	SSF-CUC-C1/2 3/4	**B17**
4Z348P	SSF-CUC-S1/2	**B17**
4Z34BP	SSF-CUC	**B17**
510HD	SSF-THC	**B35**
512	SSF-TH24	**B35**
51212	SSF-TH12	**B35**
51220	SSF-TH20	**B35**
51230	SSF-TH30	**B35**
512A	SSF-TH24A	**B35**
512HD	SSF-TH24	**B35**
512HDBP	SSF-TH24	**B35**
512HDEEP	SSF-TH24A	**B35**
512HDXT	SSF-TH24A	**B35**

Caddy	Steel City	Page
515	SSF-TFC	**B36**
515A	SSF-TFC	**B36**
520	SSF-TL24	**B35**
528	SSF-TA7	**B38, B49**
52812P	SSF-TA7-S3/4	**B38**
52816P	SSF-TA7-S1	**B38**
5288P	SSF-TA7-S1/2	**B38**
6A	SSF-HB3/8	**B13, B49**
6A24	SSF-HB3/8-F1/4	**B12**
6A58	SSF-HB3/8-F1/2	**B12**
6A912	SSF-HB3/8-F3/4	**B12**
6AB	SSF-HB3/8-AB	**B11**
6AO	SSF-HB3/8-OB	**B11**
6M	SSF-CC3/8	**B14**
6M24	SSF-CC3/8-H1/4	**B15**
6M24SM	SSF-CC3/8-F1/4	**B15**
6M4I	SSF-CC3/8T	**B14**
6M58	SSF-CC3/8-H1/2	**B15**
6M58SM	SSF-CC3/8-F1/2	**B15**
6M912	SSF-CC3/8-H3/4	**B15**
6M912SM	SSF-CC3/8-F3/4	**B15**
6MB18	SSF-CX18-C3/8UC	**B23**
6MB1824	SSF-CX18-C3/8H1/4	**B23**
6MB1858	SSF-CX18-C3/8H1/2	**B23**
6MB186	SSF-CX18-C3/8UC	**B23**
6MB18A	SSF-CX18-C3/8	**B23**
6MF	SSF-SF-C3/8	**B28**
6TIO	SSF-HA3/8-OBT	**B11**
6TO	SSF-HA3/8-OB	**B11**
6Z34	SSF-CUC	**B17**
6Z3412P	SSF-CUC-S3/4	**B17**
6Z3416M	SSF-CUC-C1	**B17**
6Z3416P	SSF-CUC-S1	**B17**
6Z34812M	SSF-CUC-C1/2 3/4	**B17**
6Z348P	SSF-CUC-S1/2	**B17**
708	SSF-HB1/4	**B13, B49**
708	SSF-HB8	**B13**
70824	SSF-HB1/4-F1/4	**B12**
70824	SSF-HB8-F1/4	**B12**
70858	SSF-HB1/4-F1/2	**B12**
70858	SSF-HB8-F1/2	**B12**
708912	SSF-HB1/4-F3/4	**B12**
708912	SSF-HB8-F3/4	**B12**
708AB	SSF-HB1/4-AB	**B11**
708AB	SSF-HB8-AB	**B11**

Caddy	Steel City	Page
708AO	SSF-HB1/4-OB	**B11**
708AO	SSF-HB8-OB	**B11**
740	SSF-MPS	**B50**
760	SSF-SX	**B27**
766A	SS1-TB	**B27**
766ABP	SS1-TB	**B27**
770	CI8912	**–**
771	CI8905	**–**
781	SSF-SP1	**B32**
812M	SSF-CC1/2 3/4	**B14**
812M24	SSF-CC1/2 3/4-H1/4	**B15**
812M24BP	SSF-CC1/2 3/4-H1/4	**B15**
812M24SM	SSF-CC1/2 3/4-F1/4	**B15**
812M4I	SSF-CC1/2 3/4T	**B14**
812M58	SSF-CC1/2 3/4-H1/2	**B15**
812M58SM	SSF-CC1/2 3/4-F1/2	**B15**
812M912	SSF-CC1/2 3/4-H3/4	**B15**
812M912SM	SSF-CC1/2 3/4-F3/4	**B15**
812MATA	SSF-TCH-C1/2 3/4	**B37**
812MATS	SSF-TCV-C1/2 3/4	**B37**
812MB18	SSF-CX18-C1/2 3/4UC	**B23**
812MB1824	SSF-CX18-C1/2 3/4-H1/4	**B23**
812MB1858	SSF-CX18-C1/2 3/4-H1/2	**B23**
812MB186	SSF-CX18-C1/2 3/4UC	**B23**
812MB18A	SSF-CX18-C1/2 3/4	**B23**
812MB18S	SSF-CX18-C1/2 3/4-S	**B23**
812MBC	SSF-BBC-C1/2 3/4V	**B6**
812MF	SSF-SF-C1/2 3/4	**B28**
8P	SSF-CS1/2	**B14**
8P12P	SSF-CS1/2-S3/4	**B21**
8P16P	SSF-CS1/2-S1	**B21**
8P24	SSF-CS1/2-H1/4	**B16**
8P24SM	SSF-CS1/2-F1/4	**B16**
8P4I	SSF-CS1/2T	**B14**
8P58	SSF-CS1/2-H1/2	**B16**
8P58SM	SSF-CS1/2-F1/2	**B16**
8P8P	SSF-CS1/2-S1/2	**B21**
8P912	SSF-CS1/2-H3/4	**B16**

Cross reference – Caddy

Caddy	Steel City	Page
8P912SM	SSF-CS1/2-F3/4	**B16**
8PATA	SSF-TCH-S1/2	**B37**
8PATS	SSF-TCV-S1/2	**B37**
8PF	SSF-SF-S1/2	**B28**
AF14	SSF-BA1/4	**B8**
AF144TI	SSF-BA1/4-A1/4T	**B8**
AF146A	SSF-BA1/4-B3/8	**B8**
AF146T	SSF-BA1/4-A3/8	**B8**
AF146TI	SSF-BA1/4-A3/8T	**B8**
AF14708	SSF-BA1/4-B1/4	**B8**
AF14708	SSF-BA1/4-B8	**B8**
AO	SSF-HOB	**B13, B49**
AOL	SSF-HOB	**B13, B49**
AOL12P	SSF-CS3/4-OB	**B24**
AOL16P	SSF-CS1-OB	**B24**
AOL812M	SSF-CS1/2-OB	**B24**
AOL8P	SSF-CS1/2-OB	**B24**
ATA4I	SSF-TCHT	**B37**
ATS4I	SSF-TCVT	**B37**
BC	SSF-BBC	**B6**
BC090900EG	U568-6EG Superstrut	
BC091200EG	U568-7EG Superstrut	
BC091500EG	U568-8EG Superstrut	
BC101500EG	SSF-BR1 Superstrut	
BC12P	SSF-BBC-S3/4V	**B6**
BC12PSM	SSF-BBC-S3/4H	**B6**
BC130025EG	U560-1/4 Superstrut	
BC130037EG	U560-3/8 Superstrut	
BC130050EG	U560-1/2 Superstrut	
BC130062EG	U560-5/8 Superstrut	
BC140037EG	U564-3/8 Superstrut	
BC140050EG	U564-1/2 Superstrut	
BC140062EG	U564-5/8 Superstrut	
BC16M	SSF-BBC-C1V	**B6**
BC16P	SSF-BBC-S1V	**B6**
BC16PSM	SSF-BBC-S1H	**B6**
BC17A000EG	U501 Superstrut	
BC17D000EG	U502 Superstrut	
BC180037EG	U514 Superstrut	
BC180050EG	U514-A Superstrut	
BC200	BC1-TB	–
BC200000EG	512 Superstrut	
BC200BP	BC1-TB	–
BC200SS	BC1-TB	–
BC20M	SSF-BBC-C1 1/4V	**B6**
BC20MSM	SSF-BBC-C1 1/4H	**B6**
BC24M	SSF-BBC-C1 1/2V	**B6**

Caddy	Steel City	Page
BC24MSM	SSF-BBC-C1 1/2H	**B6**
BC32M	SSF-BBC-C2V	**B6**
BC32MSM	SSF-BBC-C2H	**B6**
BC400	BC2-TB	–
BC812M	SSF-BBC-C1/2 3/4V	**B6**
BC812MSM	SSF-BBC-C1/2 3/4H	**B6**
BC8P	SSF-BBC-S1/2V	**B6**
BC8PSM	SSF-BBC-S1/2H	**B6**
BCBP	SSF-BBC	**B6**
BP8-12-H7	SSF-SAB-C1/2 3/4	**B32**
BHC	SSF-THC	**B35**
C2416SM	SSF-CC1-F1/4	**B15**
C24812SM	SSF-CC1/2 3/4-F1/4	**B15**
C4T124	SSF-HA1/4-F1/4T	**B12**
C4T158	SSF-HA1/4-F1/2T	**B12**
C4T1912	SSF-HA1/4-F3/4T	**B12**
C5816SM	SSF-CC1-F1/2	**B15**
C58812SM	SSF-CC1/2 3/4-F1/2	**B15**
C91216SM	SSF-CC1-F3/4	**B15**
C912812SM	SSF-CC1/2 3/4-F3/4	**B15**
CAT12	SSF-VJ1 5/16	**B43**
CAT1224	SSF-VJ1 5/16-H1/4-AB	**B44**
CAT1224SM	SSF-VJ1 5/16-F1/4	**B43**
CAT124Z34	SSF-VJ1 5/16-UC	**B43**
CAT1258	SSF-VJ1 5/16-A7	**B44**
CAT1258SM	SSF-VJ1 5/16-H1/2-AB	**B44**
CAT126Z34	SSF-VJ1 5/16-F1/2	**B43**
CAT12912	SSF-VJ1 5/16-UC	**B44**
CAT12912SM	SSF-VJ1 5/16-H13/4-AB	**B44**
CAT12AB	SSF-VJ1 5/16-F3/4	**B43**
CAT12AF14	SSF-VJ1 5/16-AB	**B44**
CAT12BC	SSF-VJ1 5/16-A1/4	**B44**
CAT12BC200	SSF-VJ1 5/16-BC	**B43**
CAT12CD1B	SSF-VJ1 5/16-CH1LN	**B43**
CAT12TS	SSF-VJ1 5/16-BC-AB	**B43**
CAT12VF14	SSF-VJ1 5/16-V1/4	**B44**
CAT21	SSF-VJ1 5/16C	**B43**
CAT2124	SSF-VJ1 5/16-H1/4-AB	**B44**
CAT2124SM	SSF-VJ1 5/16-F1/4	**B43**
CAT214Z34	SSF-VJ1 5/16-UC	**B44**
CAT21528	SSF-VJ1 5/16-A7	**B44**
CAT2158	SSF-VJ1 5/16-H1/2-AB	**B44**

Caddy	Steel City	Page
CAT2158SM	SSF-VJ1 5/16-F1/2	**B43**
CAT216Z34	SSF-VJ1 5/16-UC	**B44**
CAT21912	SSF-VJ1 5/16-H13/4-AB	**B44**
CAT21912SM	SSF-VJ1 5/16-F3/4	**B43**
CAT21AB	SSF-VJ1 5/16-AB	**B44**
CAT21AF14	SSF-VJ1 5/16-A1/4	**B44**
CAT21BC	SSF-VJ1 5/16-BC	**B43**
CAT21BCB	SSF-VJ1 5/16-BC-AB	**B43**
CAT21SS	SSF-VJ1 5/16C	**B43**
CAT21VF14	SSF-VJ1 5/16-V1/4	**B44**
CAT32	SSF-VJ2	**B43**
CAT32	SSF-VJ2C	**B43**
CAT3224	SSF-VJ2-H1/4-AB	**B44**
CAT3224SM	SSF-VJ2-F1/4	**B43**
CAT324Z34	SSF-VJ2-UC	**B44**
CAT32528	SSF-VJ2-A7	**B44**
CAT3258	SSF-VJ2-H1/2-AB	**B44**
CAT3258SM	SSF-VJ2-F1/2	**B43**
CAT326Z34	SSF-VJ2-UC	**B44**
CAT32912	SSF-VJ2-H13/4-AB	**B44**
CAT32912SM	SSF-VJ2-F3/4	**B43**
CAT32AB	SSF-VJ2-AB	**B44**
CAT32AF14	SSF-VJ2-A1/4	**B44**
CAT32BC	SSF-VJ2-BC	**B43**
CAT32BCB	SSF-VJ2-BC-AB	**B43**
CAT32SS	SSF-VJ2	**B43**
CAT32VF14	SSF-VJ2-V1/4	**B44**
CATHBA	SSF-VB10	**B43**
CD0B	6H0-TB	–
CD0BBP	6H0-TB	–
CD0BSS	6H0TBSS	–
CD1B	6H1-TB	–
CD1BBP	6H1-TB	–
CD1BSS	6H1 BSS	–
CD2.5B	6H2 1/2TB	–
CD2.5BSS	6H2-1/2 BSS	–
CD2B	6H2-TB	–
CD2BSS	6H2 BSS	–
CD3B	6H3-TB	–
CD3BSS	6H3 BSS	–
CD4B	6H4-TB	–
CD4BSS	6H4 BSS	–
CD5B	6H5-TB	–
CD5BSS	6H5 BSS	–
CD6B	6H6-B	–
CD6BSS	6H6 BSS	–

Cross reference – Caddy

Caddy	Steel City	Page
CD7B	6H7-B	–
CD7BSS	6H7 BSS	–
CD8B	6H8-B	–
CD8BSS	6H8BSS	–
CD9B	6H9-B	–
CD9BSS	6H9BSS	–
CJ6	SSF-SC6	–
CM2416M	SSF-CC1-H1/4	**B15**
CM24812M	SSF-CC1/2 3/4-H1/4	**B15**
CM24S	SSF-BH1/4S	**B7**
CM5816M	SSF-CC1-H1/2	**B15**
CM58812M	SSF-CC1/2 3/4-H1/2	**B15**
CM58S	SSF-BH1/4S	**B7**
CM91216M	SSF-CC1-H3/4	**B15**
CM912812M	SSF-CC1/2 3/4-H3/4	**B15**
CM912S	SSF-BH1/4S	**B7**
CNB12P	SSF-CS3/4-FB	**B24**
CNB812M	SSF-CC1/2 3/4-FB	**B24**
CNB8P	SSF-CS1/2-FB	**B24**
CS812	SSF-SS1/2 3/4	**B26**
CS812D	SSF-SS1/2 3/4D	**B26**
DH2	SSF-MNH	**B52**
DSB		–
DSI2A	CI820D	**B33**
DSI2ABP	CI820D	**B33**
ESG1	1300	**B32**
ESG1BP	1300	**B32**
ESG1M	1300	**B32**
ET0050HD	EC-1/2	–
ET0075HD	EC-3/4	–
ET0100HD	EC-1	–
ET0125HD	EC-1-1/4	–
ET0150HD	EC-1-1/2	–
ET0200HD	EC-2	–
ET0250HD	EC-2-1/2	–
ET0300HD	EC-3	–
FB12P	SSF-SAB-S3/4	**B32**
FB6M	SSF-SAB-C3/8	**B32**
FB812M	SSF-SAB-C1/2 3/4	**B32**
FB8P	SSF-SAB-S1/2	**B32**
FBS18	SSF-SV18	**B30**
H23	SSF-SH2346	**B29**
H4	SSF-SH2346	**B29**
H46TC	SSF-SH2346	**B29**
H6	SSF-SH2346	**B29**

Caddy	Steel City	Page
HS3	SSF-SHSB	**B31**
IDS	SSF-TS5/8	**B36**
IDS1.5	SSF-TS1 1/2	**B36**
IDS2	SSF-TS2	**B36**
IDS9	SSF-TS5/8	**B36**
INC8T5	U 543	Superstrut
K12	SSF-CK3/4	**B18**
K12BP	SSF-CK3/4	**B18**
K16	SSF-CK1	**B18**
K20	SSF-CK1	**B18**
K8	SSF-CK1/2	**B18**
K8BP	SSF-CK1/2	**B18**
KX	SSF-CK535	**B18**
KXBP	SSF-CK535	**B18**
LFC	CI-8930	**B41**
LFC90	CI-8932	**B41**
M24	SSF-BH1/4	**B7**
M24S	SSF-BH1/4S	**B7**
M58	SSF-BH1/2	**B7**
M58S	SSF-BH1/2S	**B7**
M912	SSF-BH3/4	**B7**
M912S	SSF-BH3/4S	**B7**
MAC2	SSF-CR2	**B22**
MAC2123	SSF-CR2-Z2	**B22**
MAC224	SSF-CR2-H1/4	**B22**
MAC224SM	SSF-CR2-F1/4	**B22**
MAC24Z34	SSF-CR2-UC	**B22**
MAC258	SSF-CR2-H1/2	**B22**
MAC258SM	SSF-CR2-F1/2	**B22**
MAC2BC	SSF-CR2-BCV	**B22**
MAC2T	SSF-CR4	**B22**
MAC2VF14	SSF-CR2-V1/4	**B22**
MF250	SSF-SF1/4	**B28**
MF375	SSF-SF3/8	**B28**
MF500	SSF-SF1/2	**B28**
MF625	SSF-SF5/8	**B28**
MF750	SSF-SF3/4	**B28**
MFA4I	CM100-1/4	Superstrut
MFA625	A182-1/4X1	Superstrut
MFI	SSF-SFT	**B28**
MFO	SSF-SF0	**B28**
MFS	SSF-SFA	**B28**
MP1P	VW1	**B33, B48**
MP1S	VN1	**B33, B48**
MP25	VN2	**B33, B48**
MPLS	SSF-SLV	**B33, B48**
MSF	SSF-SMX	**B26**

Caddy	Steel City	Page
MSR24	SSF-HR-F1/4	**B13**
MSR58	SSF-HR-F1/2	**B13**
MSR912	SSF-HR-F3/4	**B13**
MSS24	SSF-HS-F1/4	**B13**
MSS58	SSF-HS-F1/2	**B13**
MSS912	SSF-HS-F3/4	**B13**
NUT0025EG	AB100 1/4	Superstrut
NUT0031EG	AB100 5/16	Superstrut
NUT0037EG	AB100 3/8	Superstrut
NUT0050EG	AB100 1/2	Superstrut
NUT0062EG	AB100 5/8	Superstrut
NUT0075EG	AB100 3/4	Superstrut
PAR0037HD	PC-3/8	–
PAR0050HD	PC-1/2	–
PAR0075HD	PC-3/4	–
PAR0100HD	PC-1	–
PAR0125HD	PC-1-1/4	–
PAR0150HD	PC-1-1/2	–
PAR0200HD	PC-2	–
PAR0250HD	PC-2-1/2	–
PAR0300HD	PC-3	–
PAR0350HD	PC-3-1/2	–
PAR0400HD	PC-4	–
PCS1	SSF-CB706	**B17**
PT16	SSF-T15T5/8	**B40**
PT16FP	SSF-T15T5/8	**B40**
RA0037HD	RC-3/8	–
RA0050HD	RC-1/2	–
RA0075HD	RC-3/4	–
RA0100HD	RC-1	–
RA0125HD	R-1-1/4	–
RA0150HD	RC-1-1/2	–
RA0200HD	RC-2-SC	–
RA0250HD	RC-2-1/2	–
RA0300HD	RC-3	–
RA0350HD	RC-3-1/2	–
RA0400HD	RC-4-SC	–
RBS16	SSF-SB16	**B30**
RBS24	SSF-SB24	**B30**
RGC	3900	**B52**
RLC	SSF-SR	**B34**
RLCBP	SSF-SR	**B34**
S3575BP100	E142-1/4X075EG	–
S3575DP100	E142-1/4X075EG	–
SC2A	SSF-CES218	**B19**
SC2A	SSF-CES281	**B19**
SC2B	SSF-CES375	**B19**

Cross reference – Caddy

Caddy	Steel City	Page
SC2C	SSF-CES437	**B19**
SC2D	SSF-CES562	**B19**
SC2E	SSF-CES718	**B19**
SC2F	SSF-CES937	**B19**
SC2G	SSF-CES1250	**B19**
SC4A	SSF-CEM218	**B19**
SC4A	SSF-CEM281	**B19**
SC4B	SSF-CEM375	**B19**
SC4C	SSF-CEM437	**B19**
SC4D	SSF-CEM562	**B19**
SC4E	SSF-CEM718	**B19**
SC4F	SSF-CEM937	**B19**
SC4G	SSF-CEM1250	**B19**
SC8A	SSF-CEL218	**B19**
SC8A	SSF-CEL281	**B19**
SC8B	SSF-CEL375	**B19**
SC8C	SSF-CEL437	**B19**
SC8D	SSF-CEL562	**B19**
SC8E	SSF-CEL718	**B19**
SC8F	SSF-CEL937	**B19**
SC8G	SSF-CEL1250	**B19**
SCH12	CPC075	–
SCH12B	CPC075	–
SCH125B	CPC075	–
SCH16	CPC100	–
SCH16B	CPC100	–
SCH20	CPC100	–
SCH20B	CPC100	–
SCH24	CPC125	–
SCH24B	CPC125	–
SCH32B	CPC150	–
SCH40B	CPC200	–
SCH48B	CPC250	–
SCH56B	CPC300	–
SCH64B	CPC350	–
SCH6B	CPC050	–
SCH72B	CPC400	–
SCH8	CPC050	–
SCH8B	CPC050	–
SGB16	SSF-SG1-16	–
SGB16A	SSF-SG16P	–
SGB16D	SSF-SG2-16	–
SGB24	SSF-SG1-24	–
SGB24A	SSF-SG24P	–
SGB24D	SSF-SG2-24	–
SK125I	703-3/4EG	–
SK125IBP	703-3/4EG	–

Caddy	Steel City	Page
SK165I	703-1EG	–
SK16ALA	701-140AL	Superstrut
SK205I	703-1-1/4EG	–
SK245I	703-1-1/2EG	–
SK325I	703-2EG	–
SK405I	702-2-1/2EG	–
SK85I	703-1/2EG	–
SK85IBP	703-1/2EG	–
SPATA	SSF-TCH-S1/2	**B37**
SPRA0025EG	A100 1/4EG	–
SPRA0037EG	A100 3/8EG	–
SPRA0050EG	A100 1/2	Superstrut
SPRC0025EG	B100 1/4	Superstrut
SPRC0037EG	B100 3/8	Superstrut
SPRC0050EG	B100 1/2	Superstrut
SPRD0025EG	H100 1/4	Superstrut
SPRD0037EG	H100 3/8	Superstrut
SPRD0050EG	H100 1/2	Superstrut
SPRM2508EG	A182 1/4 X 1	Superstrut
SPRM2511EG	A182 1/4 X 1-1/4	Superstrut
SPRM3711EG	A184 3/8 X 1	Superstrut
SPRM3716EG	A184 3/8 X 1-1/4	Superstrut
SPRM5011EG	A185 1/2 X 1	Superstrut
SPRM5013EG	A185 1/2 X 1-1/4	Superstrut
TSGB16	SSF-SG16A	**B29**
TSGB24	SSF-SG24A	**B29**
TSNT0025EG	CM100 1/4	Superstrut
TSNT0037EG	CM100 3/8	Superstrut
TSNT0050EG	CM100 1/2	Superstrut
VF14	SSF-BV1/16	**B10**
VF14	SSF-BV1/4	**B10**
VF144TI	SSF-BV1/16-A1/4T	**B10**
VF146A	SSF-BV1/16-B3/8	**B10**
VF146TI	SSF-BV1/16-A3/8T	**B10**
VF14708	SSF-BV1/16-B1/4	**B10**
WMX3	SSF-CW3	**B20**
WMX6	SSF-CW6	**B20**

Cross reference – Minerallac*

Minerallac	Steel City	Page
0	6H0	–
0-B	6H0-B	–
0-S	6H0-SS	–
0-SB	6H0B-SS	–
1	6H1	–
1-B	6H1-B	–
1-S	6H1-SS	–
1-SB	6H1B-SS	–
602	BC2-TB	–
112-KC	SSF-CC1 1/2	**B14**
112KC-1KC	SSF-CC1-C1 1/2	**B21**
112-KCT	SSF-CC1 1/2T	**B14**
114-KC	SSF-CC1 1/4	**B14**
114KC-1KC	SSF-CC1-C1 1/4	**B21**
114-KCT	SSF-CC1 1/4T	**B14**
12-34-KC	SSF-CC1/2 3/4	**B14**
1234KC-1KC	SSF-CC1-C1/2 3/4	**B21**
1234KC-1234KC	SSF-CC1/2 3/4-C1/2 3/4	**B21**
12-34-KCT	SSF-CC1/2 3/4T	**B14**
14-WNW	SSF-TWN1/4	–
1-KC	SSF-CC1	**B14**
1KC-1KC	SSF-CC1-C1	**B21**
1-KCT	SSF-CC1T	**B14**
2	6H2	–
2-B	6H2-B	–
2-S	6H2-SS	–
2-SB	6H2B-SS	–
2-1/2	6H2 1/2	–
2-1/2-B	6H2 1/2 B	–
2-1/2-S	6H 2 1/2-SS	–
2-1/2-SB	6H 2 1/2B-SS	–
2-KC	SSF-CC2	**B14**
2KC-1KC	SSF-CC1-C2	**B21**
2-KCT	SSF-CC2T	**B14**
3	6H3	–
3-B	6H3-B	–
3-S	6H3-SS	–
3-SB	6H3B-SS	–
38-KC	SSF-CC3/8	**B14**
38KC-1KC	SSF-CC1-C3/8	**B21**
38-KCT	SSF-CC3/8T	**B14**
4	6H4	–
4-B	6H4-B	–
4-S	6H4-SS	–
4-SB	6H4B-SS	–
5	6H5	–

Minerallac	Steel City	Page
5-B	6H5-B	–
5-S	6H5-SS	–
5-SB	6H5B-SS	–
500	SSF-BBC	**B6**
500-100	SSF-BBC-S1V	**B6**
500-100B	SSF-BBC-S1H	**B6**
500-50	SSF-BBC-S1/2V	**B6**
500-50B	SSF-BBC-S1/2H	**B6**
500-75	SSF-BBC-S3/4V	**B6**
500-75B	SSF-BBC-S3/4H	**B6**
500KC-1	SSF-BBC-C1V	**B6**
500KC-1B	SSF-BBC-C1H	**B6**
500KC-112	SSF-BBC-C1 1/2V	**B6**
500KC-112B	SSF-BBC-C1 1/2H	**B6**
500KC-114	SSF-BBC-C1 1/4V	**B6**
500KC-114B	SSF-BBC-C1 1/4H	**B6**
500KC-1234	SSF-BBC-C1/2 3/4V	**B6**
500KC-1234B	SSF-BBC-C1/2 3/4H	**B6**
500KC-2	SSF-BBC-C2V	**B6**
500KC-2B	SSF-BBC-C2H	**B6**
500M	SSF-BBC	**B6**
6	6H6	–
6-B	6H6-B	–
6-S	6H6-SS	–
6-SB	6H6B-SS	–
600	BC1-TB	–
600-10	BC1-TB	–
600-100	SSF-BBC-S1V	**B6**
600-100B	SSF-BBC-S1H	**B6**
600-50	SSF-BBC-S1/2V	**B6**
600-50B	SSF-BBC-S1/2H	**B6**
600-75	SSF-BBC-S3/4V	**B6**
600-75B	SSF-BBC-S3/4H	**B6**
600KC-1	SSF-BBC-C1V	**B6**
600KC-1-B	SSF-BBC-C1H	**B6**
600KC-112	SSF-BBC-C1 1/2V	**B6**
600KC-112-B	SSF-BBC-C1 1/2H	**B6**
600KC-114	SSF-BBC-C1 1/4V	**B6**
600KC-114B	SSF-BBC-C1 1/4H	**B6**
600KC-1234	SSF-BBC-C1/2 3/4V	**B6**
600KC-1234-B	SSF-BBC-C1/2 3/4H	**B6**
600KC-2	SSF-BBC-C2V	**B6**
600KC-2-B	SSF-BBC-C2H	**B6**
602	BC2-TB	–

Minerallac	Steel City	Page
602-B	BC2-TB	–
63R4	SSF-VR1 1/4A	**B47**
646R	SSF-VR1 1/4B	**B47**
648RW	SSF-VR1 5/8B	**B47**
648R	SSF-VR 2B	**B47**
654R	SSF-VR 4B	**B47**
7	6H7	–
7-B	6H7-B	–
7-S	6H7-SS	–
7-SB	6H7B-SS	–
700	500-SC	–
700-10	509	–
701	501	–
702	502	–
703	503-SC	–
8	6H8	–
8-B	6H8-B	–
8-S	6H8-SS	–
8-SB	6H8B-SS	–
9	6H9	–
9-B	6H9-B	–
9-S	6H9-SS	–
9-SB	6H9B-SS	–
APS	SSF-CUC	**B17**
APS-100	SSF-CUC-S1	**B17**
APS-50	SSF-CUC-S1/2	**B17**
APS-1-KC	SSF-CUC-C1	**B17**
APS-12-34-KC	SSF-CUC-C1/2 3/4	**B17**
APS-75	SSF-CUC-S3/4	**B17**
APS-KC-1	SSF-CUC-C1	**B17**
APS-KC-12-34	SSF-CUC-C1/2 3/4	**B17**
APSM	SSF-CUC	**B17**
AS-18-100	SSF-CS1-H1/4	**B16**
AS-18-50	SSF-CS1/2-H1/4	**B16**
AS-18-75	SSF-CS3/4-H1/4	**B16**
AS-516-100	SSF-CS1-H1/2	**B16**
AS-516-50	SSF-CS1/2-H1/2	**B16**
AS-516-75	SSF-CS3/4-H1/2	**B16**
AS-916-100	SSF-CS1-H3/4	**B16**
AS-916-50	SSF-CS1/2-H3/4	**B16**
AS-916-75	SSF-CS3/4-H3/4	**B16**
BA-12-34-KC	SSF-SAB-C1/2 3/4	**B32**
BA-38-KC	SSF-SAB-C3/8	**B32**
BA-50	SSF-SAB-S1/2	**B32**

* Minerallac is a registered trademark of the Minerallac Company.

Cross reference – Minerallac

Minerallac	Steel City	Page
BA-75	SSF-SAB-S3/4	**B32**
BBC	SSF-THC	**B35**
BC-18	SSF-BH1/4	**B7**
BC-18-KC-1	SSF-CC1-H1/4	**B15**
BC-18-KC-112	SSF-CC1 1/2-H1/4	**B15**
BC-18-KC-114	SSF-CC1 1/4-H1/4	**B15**
BC-18-KC-1234	SSF-CC1/2 3/4-H1/4	**B15**
BC-18-KC-2	SSF-CC2-H1/4	**B15**
BC-18-KC-38	SSF-CC3/8-H1/4	**B15**
BC-18M	SSF-BH1/4S	**B7**
BC-18-ST	SSF-BH1/4S	**B7**
BC-516	SSF-BH1/2	**B7**
BC-516-KC-1	SSF-CC1-H1/2	**B15**
BC-516-KC-112	SSF-CC1 1/2-H1/2	**B15**
BC-516-KC-114	SSF-CC1 1/4-H1/2	**B15**
BC-516-KC-1234	SSF-CC1/2 3/4-H1/2	**B15**
BC-516-KC-2	SSF-CC2-H1/2	**B15**
BC-516-KC-38	SSF-CC3/8-H1/2	**B15**
BC-516-ST	SSF-BH1/2S	**B7**
BC-916	SSF-BH3/4	**B7**
BC-916-KC-1	SSF-CC1-H3/4	**B15**
BC-916-KC-112	SSF-CC1 1/2-H3/4	**B15**
BC-916-KC-114	SSF-CC1 1/4-H3/4	**B15**
BC-916-KC-1234	SSF-CC1/2 3/4-H3/4	**B15**
BC-916-KC-2	SSF-CC2-H3/4	**B15**
BC-916-KC-38	SSF-CC3/8-H3/4	**B15**
BC-916-ST	SSF-BH3/4S	**B7**
BJ-NP	CP-1	–
BMB-16	SSF-SG1-16	–
BMB-16D	SSF-SG2-16	–
BMB-24	SSF-SG1-24	–
BMB-24D	SSF-SG2-24	–
BO	SSF-HOB	**B13, B49**
BS	SSF-SX	**B27**
BS-18	SSF-VR12	–
BS-18	SSF-VR15	–
BST		–
BXC	SSF-CM535	**B20**
DWC-1	SSF-TS5/8	**B36**
DWC-1XL	SSF-TS1 1/2	**B36**
F-15XR	SSF-CAXL1	**B19**
F2A	SSF-CES218	**B19**
F2B	SSF-CES375	**B19**
F2C	SSF-CES437	**B19**
F2D	SSF-CES562	**B19**
F2E	SSF-CES718	**B19**
F2F	SSF-CES937	**B19**
F2G	SSF-CES1250	**B19**
F4A	SSF-CEM218	**B19**
F4B	SSF-CEM375	**B19**
F4C	SSF-CEM437	**B19**
F4D	SSF-CEM562	**B19**
F4E	SSF-CEM718	**B19**
F4F	SSF-CEM937	**B19**
F4G	SSF-CEM1250	**B19**
F8A	SSF-CEL218	**B19**
F8B	SSF-CEL375	**B19**
F8C	SSF-CEL437	**B19**
F8D	SSF-CEL562	**B19**
F8E	SSF-CEL718	**B19**
F8F	SSF-CEL937	**B19**
F8G	SSF-CEL1250	**B19**
FBO-23	SSF-SH2346	**B29**
FBO-23-4	SSF-SH2346	**B29**
FBO-6	SSF-SH2346	**B29**
FH-116	SSF-BV1/16	**B10**
FH-532	SSF-BV1/4	**B10**
FS-1	SSF-CK1/2	**B18**
FS-2	SSF-CK3/4	**B18**
FS-3	SSF-CK1	**B18**
FS-4	SSF-CK1	**B18**
FS-BX	SSF-CK535	**B18**
FT	SSF-TFC	**B36**
G-100	1300	**B32**
HI-C-100	SSF-CS1	**B14**
HI-C-100-100	SSF-CS1-S1	**B21**
HI-C-100-T	SSF-CS1T	**B14**
HI-C-50	SSF-CS1/2	**B14**
HI-C-50-100	SSF-CS1/2-S1	**B21**
HIC-50-50	SSF-CS1/2-S1/2	**B21**
HI-C-50-75	SSF-CS1/2-S3/4	**B21**
HI-C-50-T	SSF-CS1/2T	**B14**
HI-C-75	SSF-CS3/4	**B14**
HI-C-75-100	SSF-CS3/4-S1	**B21**
HI-C-75-75	SSF-CS3/4-S3/4	**B21**
HI-C-75-T	SSF-CS3/4T	**B14**
JC-12-100	CI-8912	**B42, B51**
K1B	6H1-TB	–
K2B	6H2-B	–
K0B	6H0-TB	–
LS-BAR	SSF-TL24	**B35**
NB-1234	SSF-CC1/2 3/4-FB	**B24**
NB-50	SSF-CS1/2-FB	**B24**
NB-75	SSF-CS3/4-FB	**B24**
OR	SSF-SR	**B34**
P	SSF-BZ2	**B8**
P-100	SSF-BZ2-S1	**B9**
P-50	SSF-BZ2-S1/2	**B9**
P-75	SSF-BZ2-S3/4	**B9**
PH	SSF-BZ1	**B8**
PH-14	SSF-BZ1-B1/4	**B9**
PH-143-8N	SSF-BZ1-A3/8	**B9**
PH-14T	SSF-BZ1-A1/4T	**B9**
PH-38	SSF-BZ1-B3/8	**B9**
PH-38T	SSF-BZ1-A3/8T	**B9**
PKC-1	SSF-BZ2-C1	**B9**
PKC-114	SSF-BZ2-C1 1/4	**B9**
PKC-12-34	SSF-BZ2-C1/2 3/4	**B9**
PKC-38	SSF-BZ2-C3/8	**B9**
PS	SSF-HS	**B13**
PSF-18	SSF-HS-F1/4	**B13**
PSF-18R	SSF-HR-F1/4	**B13**
PSF-516	SSF-HS-F1/2	**B13**
PSF-516R	SSF-HR-F1/2	**B13**
PSF-916	SSF-HS-F3/4	**B13**
PSF-916R	SSF-HR-F3/4	**B13**
PSR	SSF-HR	**B13**
RA-14	SSF-HB8-AB	**B11**
RA-14T	SSF-HB1/4-ABT	–
RA-38	SSF-HB8-AB	**B11**
RA-38T	SSF-H3/8-ABT	–
R-14	SSF-HB1/4	**B11**
R-18-14	SSF-HB1/4-F1/4	**B12**
R-18-14	SSF-HB8-F1/4	**B12**
R-18-14-T	SSF-HA1/4-F1/4T	**B12**
R-18-38	SSF-HB3/8-F1/4	**B12**
R-38	SSF-HB3/8	**B13, B49**
R-516-14	SSF-HB1/4-F1/2	**B12**
R-516-14-T	SSF-HA1/4-F1/2T	**B12**
R-516-38	SSF-HB3/8-F1/2	**B12**
R-916-14	SSF-HB8-F3/4	**B12**
R-916-1438N	SSF-HB1/4-F3/4	**B12**
R-916-14T	SSF-HA1/4-F3/4T	**B12**
R-916-38	SSF-HB3/8-F3/4	**B12**
RA-14	SSF-HB1/4-AB	**B11**
RA-38	SSF-HB3/8-AB	**B11**
RF-116-1438N	SSF-BV1/16-A3/8	**B10**
RF-116-14	SSF-BV1/4-B8	**B10**
RF-116-14T	SSF-BV1/16-A1/4T	**B10**

Cross reference – Minerallac

Minerallac	Steel City	Page
RF-116-38	SSF-BV1/16-B3/8	**B10**
RF-116-38T	SSF-BV1/16-A3/8T	**B10**
RF-116-4	SSF-BV1/16-B1/4	**B10**
RF-532-14	SSF-BV1/16-B8	**B10**
RF-532-1438N	SSF-BV1/4-A3/8	**B10**
RF-532-14T	SSF-BV1/4-A1/4T	**B10**
RF-532-38	SSF-BV1/4-B3/8	**B10**
RF-532-38-T	SSF-BV1/4-A3/8T	**B10**
RO-14	SSF-HB1/4-OB	**B11**
RO-1438N	SSF-HA3/8-OB	**B11**
RO-14-T	SSF-HA1/4-OBT	**B11**
RO-38	SSF-HB3/8-OB	**B11**
RO-38T	SSF-HA3/8-OBT	**B11**
RS-100	SSF-CS1-OB	**B24**
RS-1234	SSF-CS1/2-OB	**B24**
RS-50	SSF-CS1/2-OB	**B24**
RS-75	SSF-CS3/4-OB	**B24**
S	SSF-SFT	**B28**
S-1900	SSF-SMX	**B26**
SB-100	SSF-SF-S1	**B28**
SB-12	SSF-SF1/2	**B28**
SB-14	SSF-SF1/4	**B28**
SB-34	SSF-SF3/4	**B28**
SB-38	SSF-SF3/8	**B28**
SB-50	SSF-SF-S1/2	**B28**
SB-58	SSF-SF5/8	**B28**
SB-75	SSF-SF-S3/4	**B28**
SBC	SSF-SFA	**B28**
SB-KC-1	SSF-SF-C1	**B28**
SB-KC-1234	SSF-SF-C1/2 3/4	**B28**
SB-KC-38	SSF-SF-C3/8	**B28**
SBC	SSF-SFA	**B28**
SBO	SSF-SFO	**B28**
SBS	SS1-TB	**B27**
SBS-2.5	SS1-TB	**B27**
SBS-3.5	SS1-TB	**B27**
SBS-4	SS1-TB	**B27**
SCT-3	SSF-T15T5/8	**B40**
SCT-3XL	SSF-T15T2	**B40**
SCX-1W	SSF-T15T5/8	**B40**
SCX-1L	SSF-T15T1 1/2	**B40**
SCX-1XL	SSF-T15T2	**B40**
SFC-18	SSF-BF1/4	**B7**
SFC-18-100	SSF-CS1-F1/4	**B16**
SFC-18-50	SSF-CS1/2-F1/4	**B16**
SFC-18-75	SSF-CS3/4-F1/4	**B16**
SFC-18-KC-1	SSF-CC1-F1/4	**B15**
SFC-18-KC-112	SSF-CC1 1/2-F1/4	**B15**
SFC-18-KC-114	SSF-CC1 1/4-F1/4	**B15**
SFC-18-KC-1234	SSF-CC1/2 3/4-F1/4	**B15**
SFC-18-KC-2	SSF-CC2-F1/4	**B15**
SFC-18-KC-38	SSF-CC3/8-F1/4	**B15**
SFC-516	SSF-BF1/2	**B7, B50**
SFC-516-100	SSF-CS1-F1/2	**B16**
SFC-516-50	SSF-CS1/2-F1/2	**B16**
SFC-516-75	SSF-CS3/4-F1/2	**B16**
SFC-516-KC-1	SSF-CC1-F1/2	**B15**
SFC-516-KC-112	SSF-CC1 1/2-F1/2	**B15**
SFC-516-KC-114	SSF-CC1 1/4-F1/2	**B15**
SFC-516-KC-1234	SSF-CC1/2 3/4-F1/2	**B15**
SFC-516-KC-2	SSF-CC2-F1/2	**B15**
SFC-516-KC-38	SSF-CC3/8-F1/2	**B15**
SFC-916	SSF-BF3/4	**B7, B50**
SFC-916-100	SSF-CS1-F3/4	**B16**
SFC-916-50	SSF-CS1/2-F3/4	**B16**
SFC-916-75	SSF-CS3/4-F3/4	**B16**
SFC-916-KC-1	SSF-CC1-F3/4	**B15**
SFC-916-KC-112	SSF-CC1 1/2-F3/4	**B15**
SFC-916-KC-114	SSF-CC1 1/4-F3/4	**B15**
SFC-916-KC-1234	SSF-CC1/2 3/4-F3/4	**B15**
SFC-916-KC-2	SSF-CC2-F3/4	**B15**
SFC-916-KC-38	SSF-CC3/8-F3/4	**B15**
SH-212	CI-8905	**B42, B51**
SS	SSF-SK	**B26**
SS-100	SSF-SK-S1	**B26**
SS-12-34	SSF-SK-C1/2 3/4	**B26**
SS-50	SSF-SK-S1/2	**B26**
SS-75	SSF-SK-S3/4	**B26**
SS-KC-1	SSF-SK-C1	**B26**
ST0B	703-1/2	–
ST1B	703-3/4	–
ST2B	703-1	–
ST3B	703-1-1/4	–
ST4B	703-1-1/2	–
ST5B	703-2	–
ST6B	701-287PG	Superstrut
ST7B	701-350PG	Superstrut
ST8B	701-400PG	Superstrut
ST9B	701-450PG	Superstrut
TB	SSF-TCH	**B37**
TB-100	SSF-TCH-S1	**B37**
TB-12-34-KC	SSF-TCH-C1/2 3/4	**B37**
TB-50	SSF-TCH-S1/2	**B37**
TB-75	SSF-TCH-S3/4	**B37**
T-BAR	SSF-TH24	**B35**
TBT Threaded	SSF-TCHT	**B37**
TS	SSF-TCV	**B37**
TS-12-34-KC	SSF-TCV-C1/2 3/4	**B37**
TS-100	SSF-TCV-S1	**B37**
TS-50	SSF-TCV-S1/2	**B37**
TS-75	SSF-TCV-S3/4	**B37**
TS-KC-12-34	SSF-TCV-C1/2 3/4	**B37**
TST Threaded	SSF-TCVT	**B37**
WBF-1	SSF-SLV	**B33, B48**